

PCB connector

Rated current: 7 A

Rated voltage: 150 V

Pitch: 3.5 mm

Mounting: Wave soldering



## UL/CUL

В	С	D
150	-	-
7	-	-
	/	
	1.3KV	
III	III	II
3	2	2
80	125	250
10	10	10
2.5	2.5	2.5
	/	
	150 7 III 3 80 10	150 - 7 - / 1.3KV  III III 3 2 80 125 10 10 2.5 2.5


Insulation Material	PA66



Flame relardant rating	UL94V-0
Conductor Material	Copper alloy
Plating of conductor surface	Sn plated
Other Data	
Pitch/Poles [mm]/[P]	3.5/2*2-2*24
Stripping Length [mm]	/
Screw/Torque(Max)[N.m]	
Operating temperature [°C]	-40~+105
Soldering temperature	260°C/5S
Pin dimensions [mm]	0.8*0.8
PCB Hole Diameter [mm]	Ø1.4

## Dimensions

## PCB opening diagram

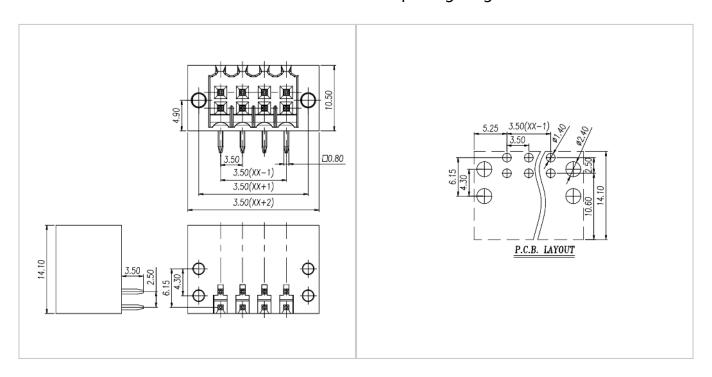

## Accessories