


T340C226K016AT7301

Aliases (T340C226K016ATTR)

T340, Tantalum, MnO₂ Tantalum, Commercial Grade, 22 uF, 10%, 16 VDC,
Lead Spacing = 5mm

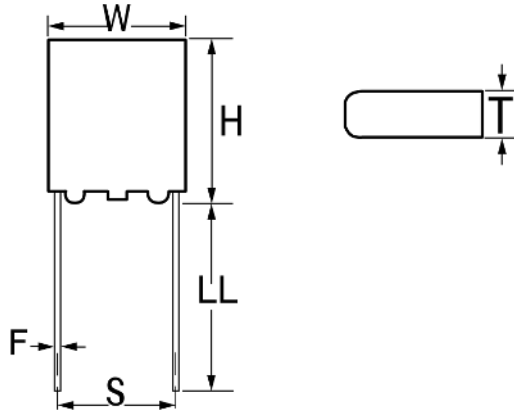

Click [here](#) for the 3D model.

| Dimensions | |
|------------|-----------------|
| W | 7.3mm MAX |
| H | 10.5mm MAX |
| T | 4.3mm MAX |
| S | 5mm +/-0.5mm |
| LL | 15mm +/-2mm |
| F | 0.5mm +/-0.03mm |

| Packaging Specifications | |
|--------------------------|------------|
| Packaging | T&R, 305mm |
| Packaging Quantity | 1000 |

| General Information | |
|---------------------|--|
| Series | T340 |
| Dielectric | MnO ₂ Tantalum |
| Style | Radial Molded |
| Description | Radial, Solid Tantalum, Molded |
| RoHS | Yes |
| Termination | Tin |
| AEC-Q200 | No |
| Construction | Molded |
| Miscellaneous | Includes Standoff Height of 0.38 +/- 0.13mm. |
| Notes | Longest Lead Is Positive. |

| Specifications | |
|-----------------------|--|
| Capacitance | 22 uF |
| Capacitance Tolerance | 10% |
| Voltage DC | 16 VDC (85C), 10 VDC (125C), 0.16 VDC (125C Reverse) |
| Temperature Range | -55/+125°C |
| Dissipation Factor | 6% |
| Leakage Current | 4 uA |