

PERFORMANCE CHARACTERISTICS


CURRENT RATING
 1.5 A AT 20°C (FULLY LOADED)
 1 A AT 70°C (FULLY LOADED)

RATED VOLTAGE 500V AC (CONT / CONT)
 OPERATING TEMPERATURE -55°C TO 125°C
 CONTACT RESISTANCE 20 MΩ MAX
 INSERTION FORCE :0.75 N MAX /CONT
 EXTRACTION FORCE: 0.15 N MIN /CONT
 INSULATION RESISTANCE :10⁴ MΩ MIN

NOTES

- LEAD FREE INDICATOR : LF- LEAD FREE
- PERFORMANCE LEVEL INDICATOR (REF DWG No. BSC 201844,003)
- THIS PRODUCT IS CSA APPROVED THIS PRODUCT IS UL RECOGNISED
- FOR RECOMMENDED PTH DIMENSIONS REFER DRAWING: BSA,201,572001
- THIS PRODUCT (LF) MEETS EUROPEAN UNION DIRECTIVE AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.

LAY OUT
 P.C.B.-HOLE

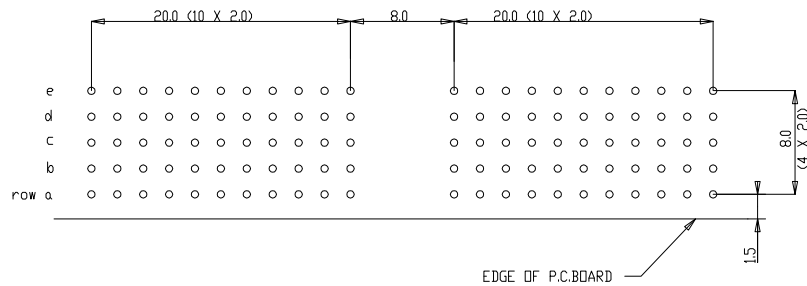

Material				Spec ref				
Mat code				tolerance				
Heat treat				projection				
Plating/Finish				MM				
rev	ecn no	dr	date	Dr	date	Product Family	size	Scale
A	DG10-0354	NZ	2010.5.30	Nickor Zuo	2010-5-30	MILLIPACS	A1	5.000
				Eng	Collins Lu	2010-5-30		
				Ch	PM Zheng	2010-5-30		
				Appr	Joseph Hsia	2010-5-30		
				FCI		MPACS 5+2R RA RCP		Rev.
				Prv/E file		CONN TYPE A		A
				catalog no		HMERIDPFA5100--J--		Rev.
						CUSTOMER DRAWING		sheet 1 of 1