

**Series: Embedded Antenna** 

### **TECHNICAL DATA SHEET**

Description: 2.4/5GHz Dualband WiFi SMT

Antenna

PART NUMBER: W3715



### Features:

• Frequency: 2.4-2.5/4.9-6GHz

• Gain: 3.7/5.5dBi

Size: 11 x 7 x 16 mm

SMT compatible

Packing: Tape&Reel

RoHS compliant

## **Applications:**

- WiFi, ISM 2.4/5GHz
- · Bluetooth, Zigbee, BLE
- DSRC 5.925GHz
- IoT and M2M devices
- Portable Electronics
- · Security, Transportation

All dimensions are in mm / inches

Issue: 1812

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION

This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden. For more information:

Pulse Worldwide Headquarters 12220 World Trade Drive San Diego, CA 92128 USA Tel:1-858-674-8100 Pulse/Larsen Antennas 18110 SE 34<sup>th</sup> St Bldg 2 Suite 250 Vancouver, WA 98683 USA Tel: 1-360-944-7551 Europe Headquarters Pulse GmbH & Do, KG Zeppelinstrasse 15 Herrenberg, Germany Tel: 49 7032 7806 0 Pulse (Suzhou) Wireless Products Co, Inc. 99 Huo Ju Road(#29 Bldg,4<sup>th</sup> Phase Suzhou New District Jiangsu Province, Suzhou 215009 PR China Tel: 86 512 6807 9998



Description: 2.4/5GHz Dualband WiFi SMT

Antenna

PART NUMBER: W3715

**Series: Embedded Antenna** 

## **ELECTRICAL SPECIFICATIONS**

Frequency 2.4-2.5GHz, 4.9-6GHz

Nominal Impedance  $50\Omega$ 

VSWR 2:1

Peak Gain (2.4-2.5GHz) 3.7dBi +/- 1 dB

Peak Gain (4.9-6GHz) 5.5dBi+/- 1 dB

Efficiency 74%

Power withstanding 5W

Radiation Pattern Omni



Description: 2.4/5GHz Dualband WiFi SMT

**Antenna** 

**PART NUMBER: W3715** 

**Series: Embedded Antenna** 

## **MECHANICAL SPECIFICATIONS**

Material SUS304

Thickness 0.5 mm

Finish Ni plating 1-3 um

Weight 0.56 g

Size(L X W X H) 11(0.43)X 7(0.28) X 16(0.63) mm(inch)

Fixing system SMT

## **ENVIRONMENTAL SPECIFICATIONS**

Operating temperature

-40/+85 ° C






Description: 2.4/5GHz Dualband WiFi SMT


**Antenna** 


**PART NUMBER: W3715** 

Series: Embedded Antenna

## **MECHANICAL DRAWING**

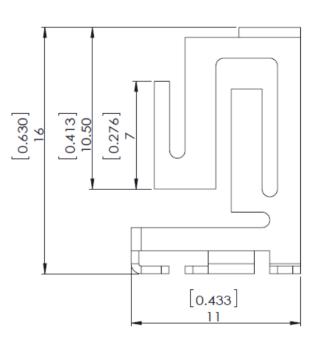

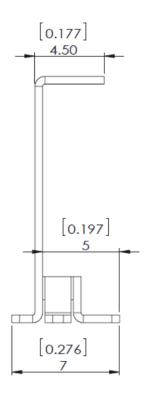

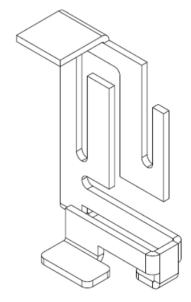



Description: 2.4/5GHz Dualband WiFi SMT

**Antenna** 


PART NUMBER: W3715

Series: Embedded Antenna


## **OTHER SPECIFICATIONS**

## **PCB LAYOUT:**

1, PCB material, FR4, size, 180X120X1mm

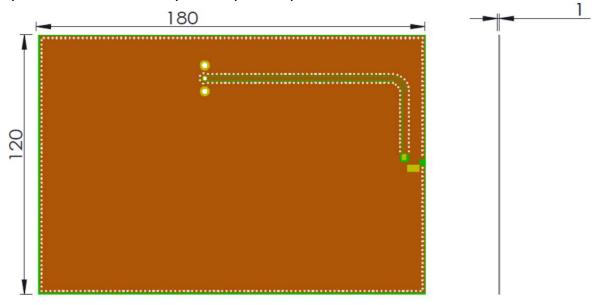

# Clearance area (Top)

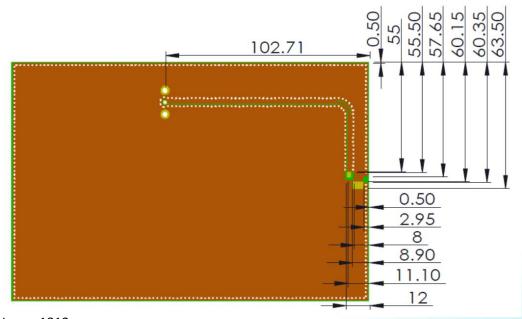



Description: 2.4/5GHz Dualband WiFi SMT


**Antenna** 

PART NUMBER: W3715


**Series: Embedded Antenna** 

## **OTHER SPECIFICATIONS**

## 3, Clearance area (Bottom)

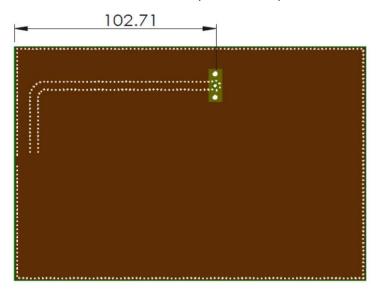

## 4, PCB Features

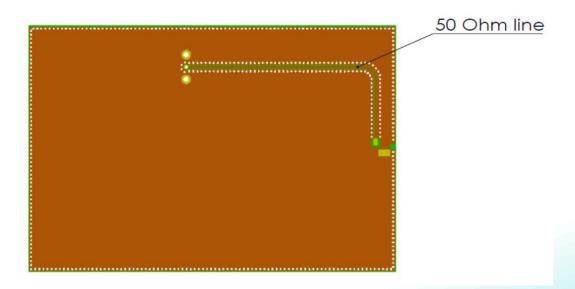





Description: 2.4/5GHz Dualband WiFi SMT


**Antenna** 


**PART NUMBER: W3715** 

Series: Embedded Antenna

## **OTHER SPECIFICATIONS**

## 3, Antenna on test PCB

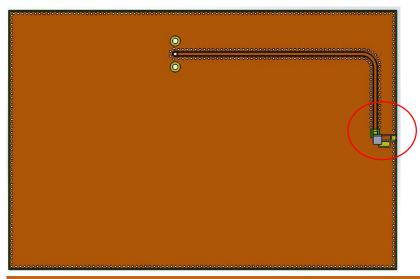

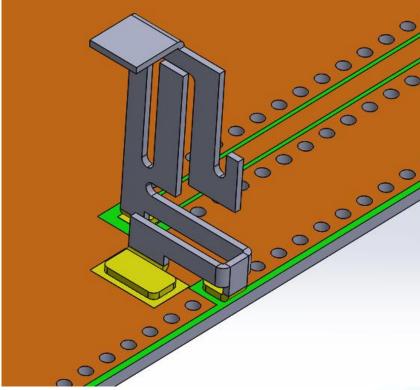





Description: 2.4/5GHz Dualband WiFi SMT

**Antenna** 

**PART NUMBER: W3715** 

**Series: Embedded Antenna** 

## **OTHER SPECIFICATIONS**

## Recommendation for reflow soldering process

Printing stencil thickness 0,15 - 0,25 mm is recommended for the solder paste. The maximum soldering temperature should not exceed 260°C. The temperature profile recommendations for reflow soldering process is presented in the Figures 1 and 2. The reflow profile presented in figure 1 describes minimum reflow temperatures. The reflow profile presented in figure 2 describes maximum reflow temperatures. located at the center of the coverage area.

П		Method of heat transfer	Controlled hot air convection
Γ	1	Average temperature gradient in preheating	2.5 °C/s
Г	2	Soak time	2-3 minutes
Γ	3	Max temperature gradient in reflow	3 °C/s
	4	Time above 217 °C	Max 30 sec
П	5	Peak temperature in reflow	230 °C for 10 seconds
	6	Temperature gradient in cooling	Max -5 °C/s

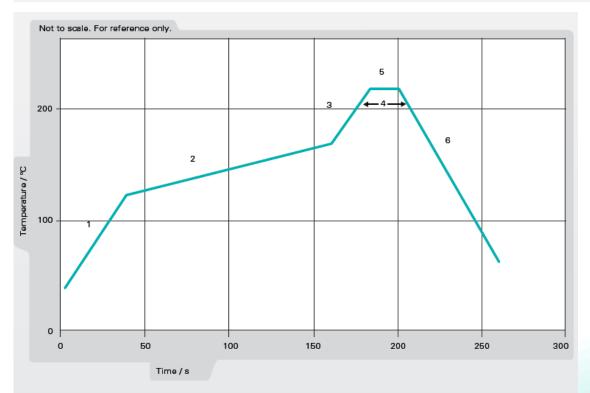


Figure 1. Minimum temperature profile recommendation for reflow soldering process





Description: 2.4/5GHz Dualband WiFi SMT

**Antenna** 

**PART NUMBER: W3715** 

## Series: Embedded Antenna

## **OTHER SPECIFICATIONS**

	Method of heat transfer	Controlled hot air convection
1	Average temperature gradient in preheating	2.5 °C/s
2	Soak time	2-3 minutes
3	Max temperature gradient in reflow	3 °C/s
4	Time above 217 °C	Max 60 sec
5	Time above 230 °C	Max 50 sec
6	Time above 250 °C	Max 10 sec
7	Peak temperature in reflow	260 °C for 5 seconds
8	Temperature gradient in cooling	Max -5 °C/s

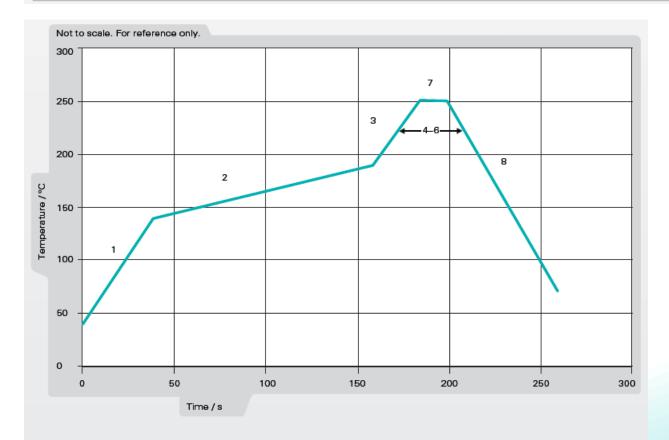


Figure 2. Maximum temperature profile recommendation for reflow soldering process





Description: 2.4/5GHz Dualband WiFi SMT

**Antenna** 


**PART NUMBER: W3715** 

**Series: Embedded Antenna** 



**VSWR** 

### . . . . . . . . . . . .

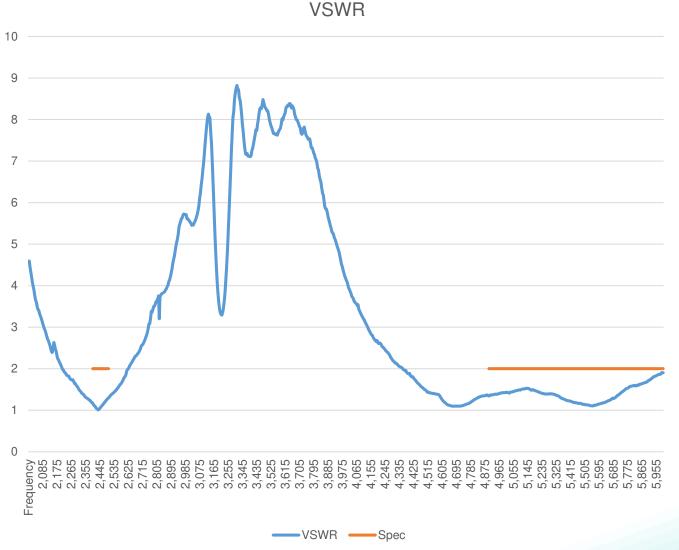





Description: 2.4/5GHz Dualband WiFi SMT


**Antenna** 

**PART NUMBER: W3715** 

**Series: Embedded Antenna** 

## **CHARTS**

## Efficiency(%)

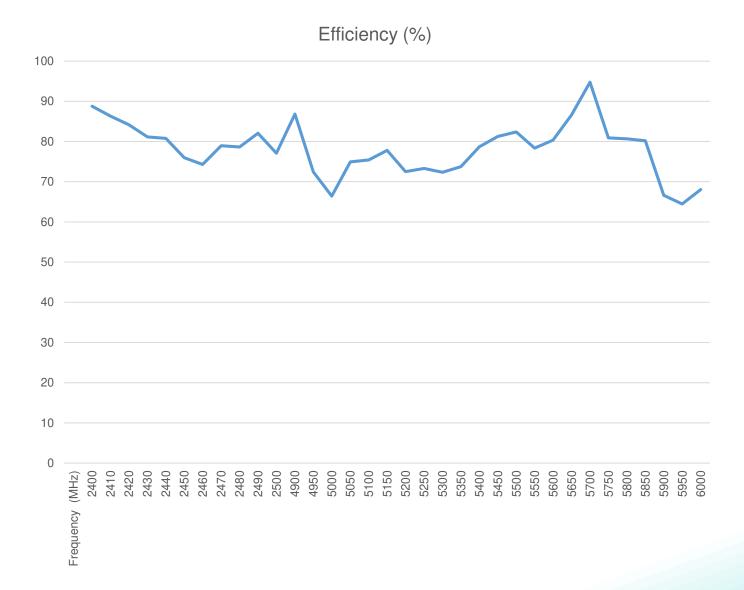





Description: 2.4/5GHz Dualband WiFi SMT

**Antenna** 

**PART NUMBER: W3715** 

**Series: Embedded Antenna** 

## **CHARTS**

# Peak Gain (dBi)





Description: 2.4/5GHz Dualband WiFi SMT


**Antenna** 

**PART NUMBER: W3715** 

**Series: Embedded Antenna** 

## **CHARTS**

# Free Space Radiation Pattern

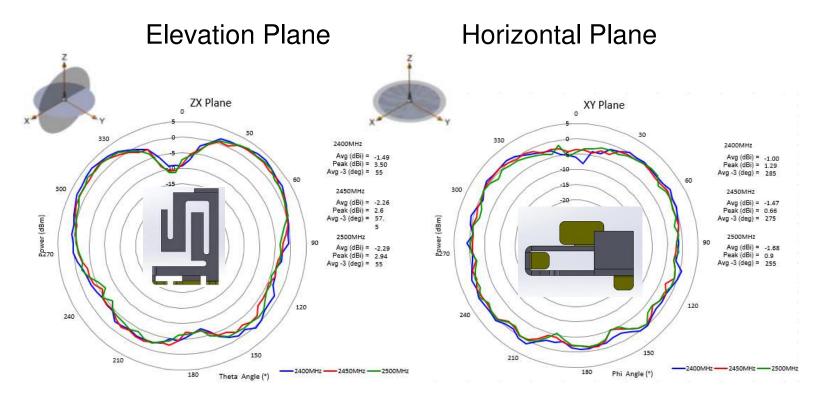



Description: 2.4/5GHz Dualband WiFi SMT


Antenna

**PART NUMBER: W3715** 

**Series: Embedded Antenna** 

## **CHARTS**

## Free Space Radiation Pattern

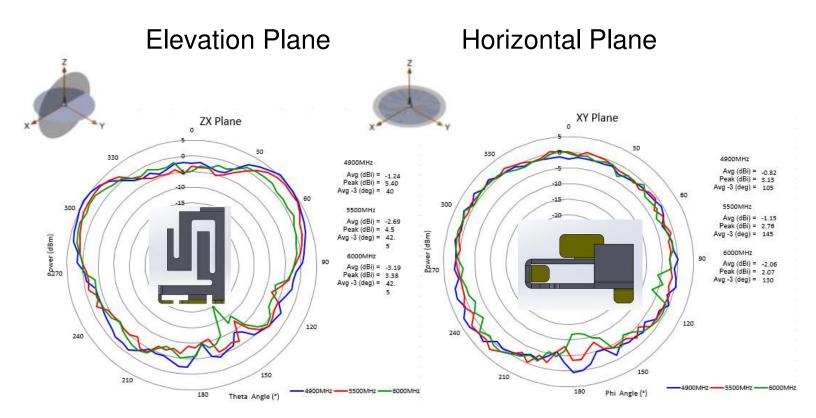



Series: Embedded Antenna

### **TECHNICAL DATA SHEET**

Description: 2.4/5GHz Dualband WiFi SMT

**Antenna** 

**PART NUMBER: W3715** 

## **PACKAGING**

Tape and Reel packing: 200 PCS/ Tape and Reel 400PCS/ Carton box

Tape Width: 32mm

Tape Material: Polystyrene



