


ISM 868 MHz Ceramic Chip Antenna (AA701) with Evaluation Board

Engineering Specification

1. Product Number

H 2 B 1 S G 1 A 1 S 0 3 0 0

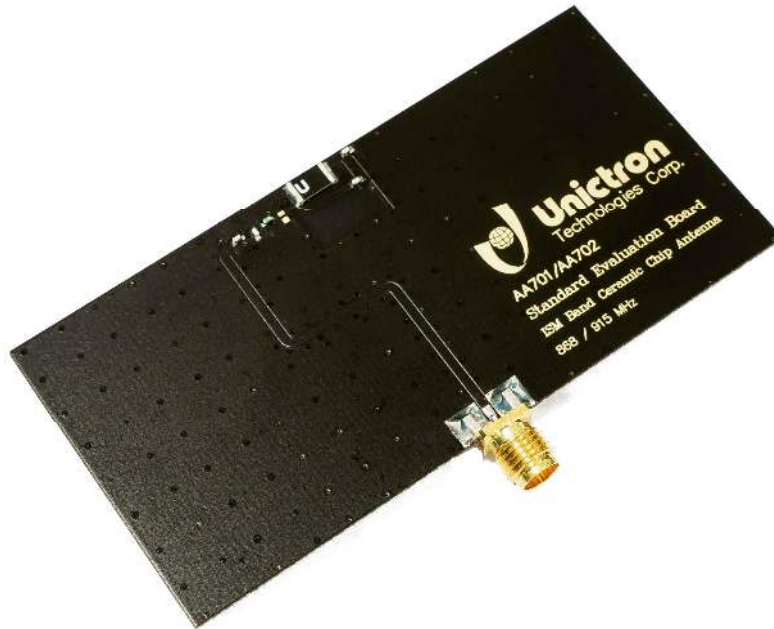

2. Features

- *Stable and reliable in performances
- *Low profile, compact size
- *RoHS compliance
- *SMT processes compatible

3. Applications

- *Short Range Devices (SRD)
- *IoT applications
- *Alarm system

4. Description

Unictron's AA701 ceramic chip antenna is designed for ISM 868MHz band applications, covering frequencies 863~870 MHz. Fabricated with proprietary design and processes, AA701 shows excellent performance and is fully compatible with SMT processes which can decrease the assembly cost and improve device quality and consistency.



詠業科技股份有限公司
Unictron Technologies Corporation
Website:www.unictron.com

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

Prepared by : Xenia Designed by : Phillip Checked by : Mike Approved by : Herbert

TITLE : ISM 868 MHz Ceramic Chip Antenna (AA701) with Evaluation Board Engineering Specification	DOCUMENT NO.	H2B1SG1A1S0300	REV.
			A

5-2. Electrical Specifications (Evaluation Board Dimensions: 80 x 40 mm²)

5-2-1. Electrical Table

Characteristics		Specifications	Unit
Outline Dimensions		5.0 x 3.0 x 0.5	mm
Ground Plane Dimensions		80 x 40	mm
Working Frequency		863~870	MHz
VSWR (@ center frequency)*		2 Max.	
Characteristic Impedance		50	Ω
Polarization		Linear Polarization	
Peak Gain	(@868 MHz)	-0.9 (typical)	dBi
Efficiency		52 (typical)	%

*Center frequency means the frequency with the lowest value in return loss of the chip antenna on the evaluation board.



詠業科技股份有限公司
Unictron Technologies Corporation
Website: www.unictron.com

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

Prepared by : **Xenia**

Designed by : **Phillip**

Checked by : **Mike**

Approved by : **Herbert**

TITLE : ISM 868 MHz Ceramic Chip Antenna (AA701) with Evaluation Board Engineering Specification


DOCUMENT NO.

H2B1SG1A1S0300


REV. A

5-2-2. Return Loss & VSWR

Return Loss (S₁₁)

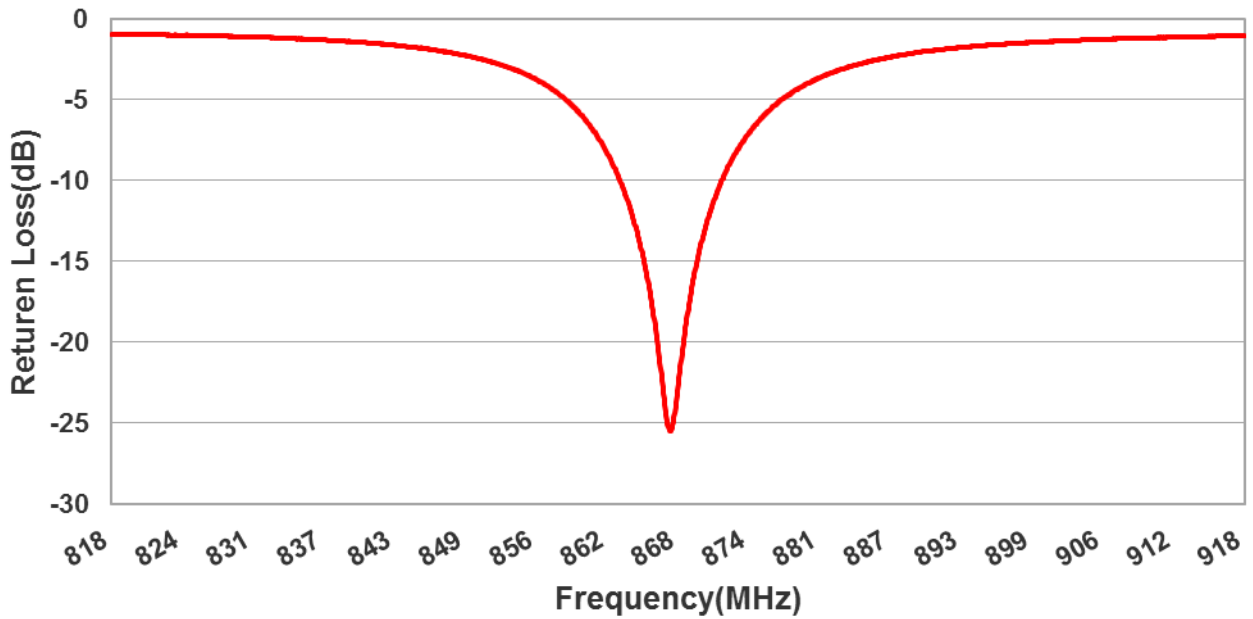

VSWR

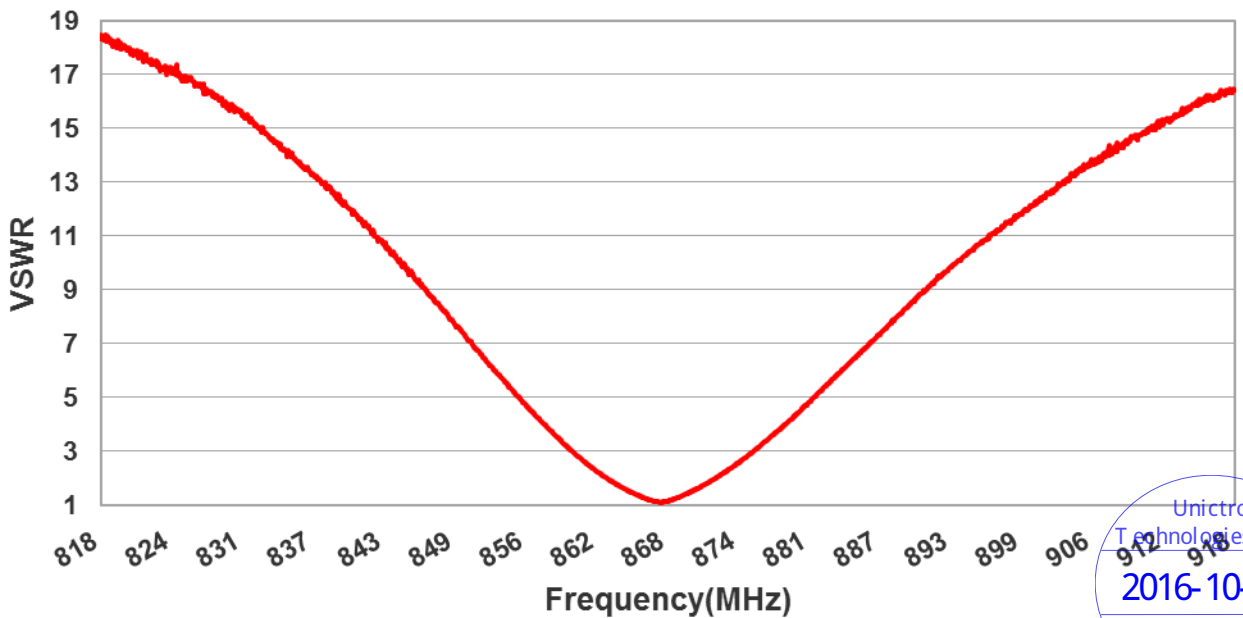

Unictron Technologies Corp.
2016-10-20
Document Control Center



詠業科技股份有限公司
Unictron Technologies Corporation
Website: www.unictron.com


THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

Prepared by : Xenia Designed by : Phillip Checked by : Mike Approved by : Herbert

TITLE : ISM 868 MHz Ceramic Chip Antenna (AA701) with Evaluation Board Engineering Specification	DOCUMENT NO.	H2B1SG1A1S0300	REV.
			A

6. Outline Dimensions of Antenna & Evaluation Board (unit: mm)


6-1. Antenna Dimensions

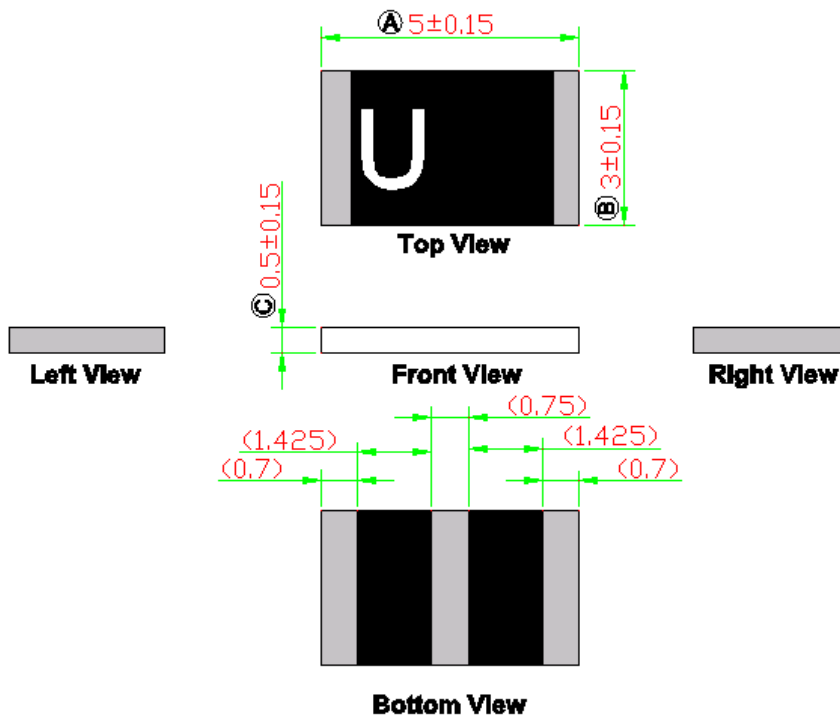

NOTE:

1. All materials are RoHS compliant.
2. "A~C" Critical Dimensions.
3. "()" Reference Dimensions.

PIN Definitions

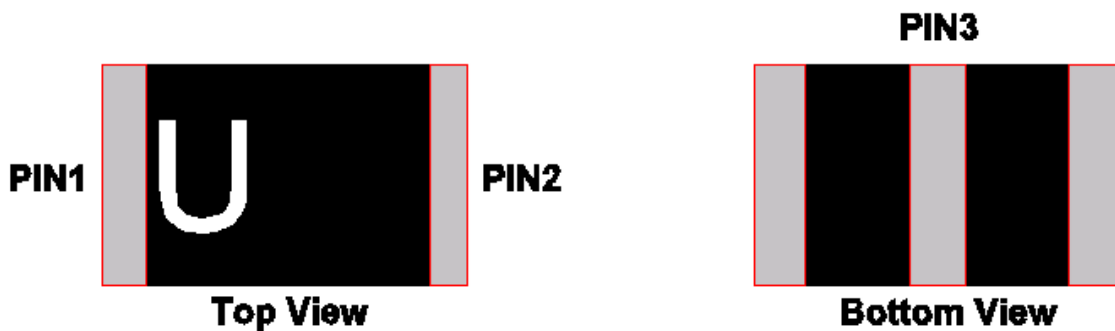

PIN	1	2	3
Soldering Pad	Signal	Tuning / Ground	Unictron Technologies Corp N/C 2016-10-20




詠業科技股份有限公司
Unictron Technologies Corporation
Website: www.unictron.com

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

Prepared by : **Xenia** Designed by : **Phillip** Checked by : **Mike** Approved by : **Herbert**

TITLE : ISM 868 MHz Ceramic Chip Antenna (AA701) with Evaluation Board Engineering Specification	DOCUMENT NO.	H2B1SG1A1S0300	REV.
			A

6-2. Evaluation Board with Antenna

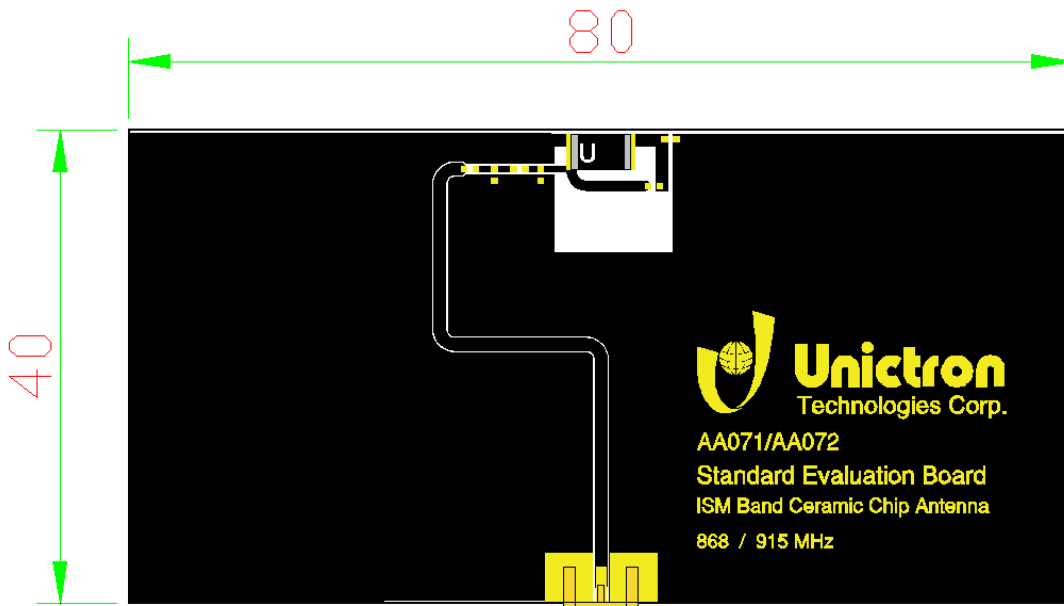

SMA female
1/4"-36UNS-2A

unit: mm



詠業科技股份有限公司
Unictron Technologies Corporation
Website:www.unictron.com

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

Prepared by : **Xenia**

Designed by : **Phillip**

Checked by : **Mike**

Approved by : **Herbert**

TITLE : ISM 868 MHz Ceramic Chip Antenna (AA701) with Evaluation Board Engineering Specification

DOCUMENT NO.





H2B1SG1A1S0300

REV.

A

7. Radiation Pattern (with 80 x 40 mm² Evaluation Board)

7-1. 3D Gain Pattern @ 868 MHz (unit: dBi)

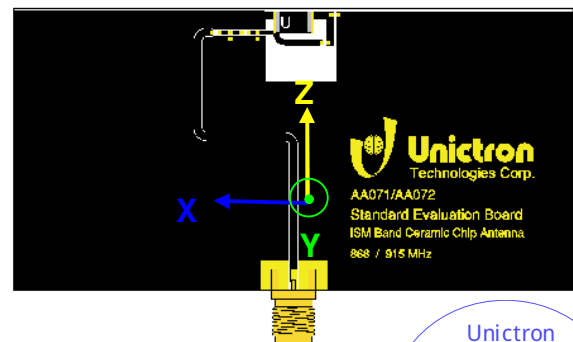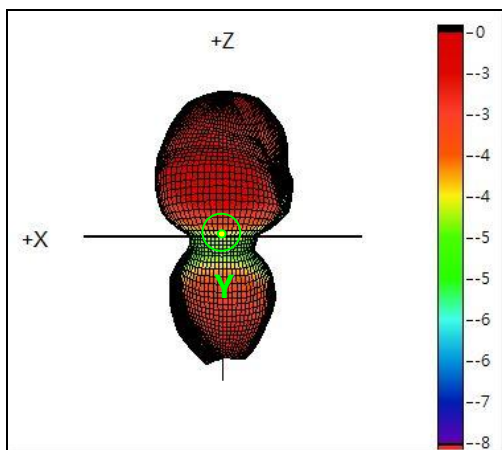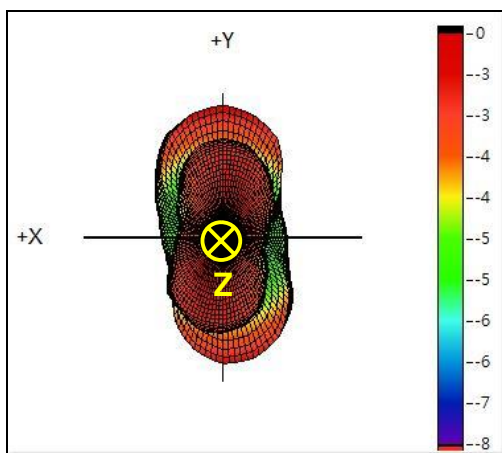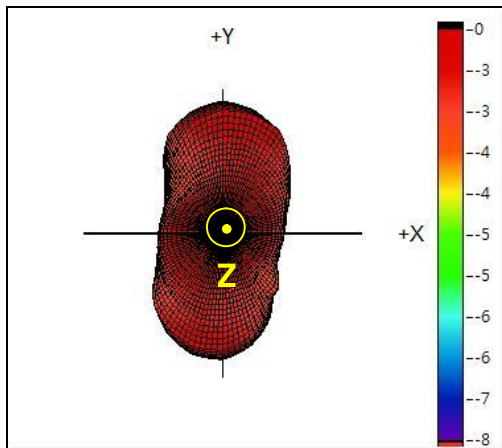

Unictron
Technologies Corp.
2016-10-20
Document
Control Center



詠業科技股份有限公司
Unictron Technologies Corporation
Website: www.unictron.com

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

Prepared by : Xenia

Designed by : Phillip

Checked by : Mike

Approved by : Herbert

TITLE : ISM 868 MHz Ceramic Chip Antenna (AA701) with Evaluation Board Engineering Specification

DOCUMENT NO.

H2B1SG1A1S0300


REV.

A

7-2. 3D Efficiency Table

Frequency (MHz)	863	864	865	866	867	868	869	870	871	872	873
Efficiency (dB)	-3.4	-3.2	-3.0	-2.8	-2.8	-2.8	-2.9	-2.9	-3.0	-3.1	-3.2
Efficiency (%)	45.9	48.4	50.3	52.2	52.5	52.8	51.8	50.8	50.3	49.2	47.7
Peak Gain (dBi)	-1.5	-1.3	-1.1	-0.9	-0.9	-0.9	-1.0	-1.0	-1.1	-1.2	-1.3

7-3. 3D Efficiency vs. Frequency

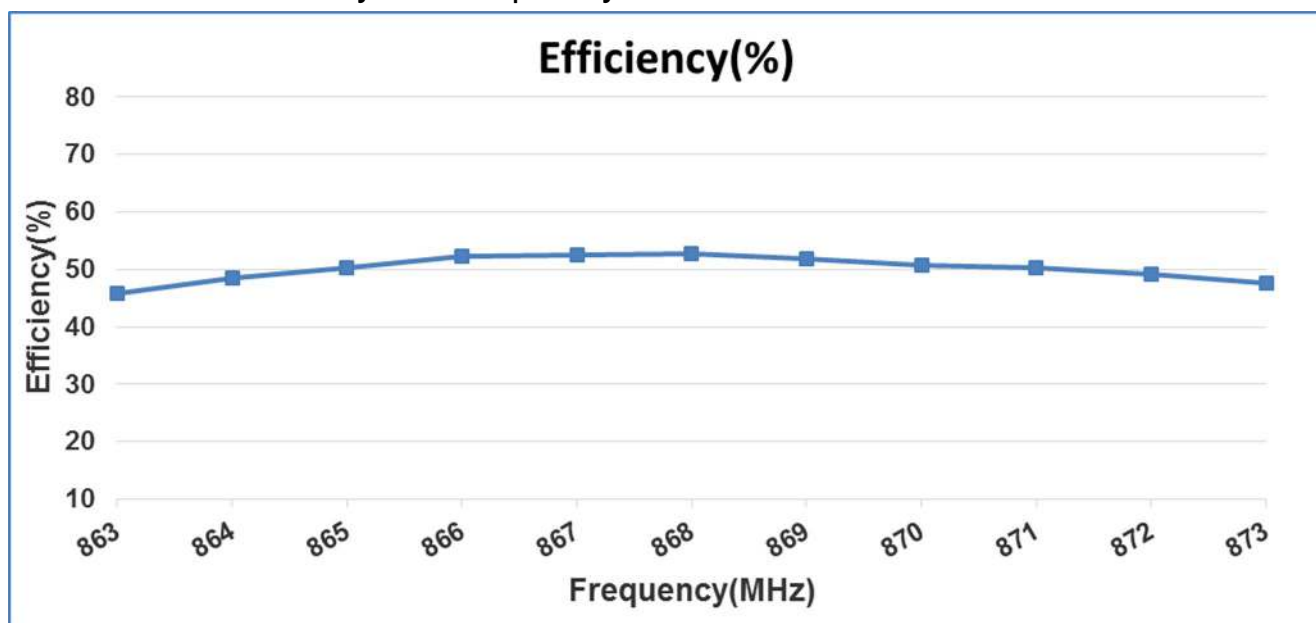

詠業科技股份有限公司
 Unictron Technologies Corporation
 Website: www.unictron.com


THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

Prepared by : Xenia Designed by : Phillip Checked by : Mike Approved by : Herbert

TITLE : ISM 868 MHz Ceramic Chip Antenna (AA701) with Evaluation Board Engineering Specification	DOCUMENT NO.	H2B1SG1A1S0300	REV.
			A


8. Frequency tuning and Matching circuit

8-1. Chip antenna tuning scenario :

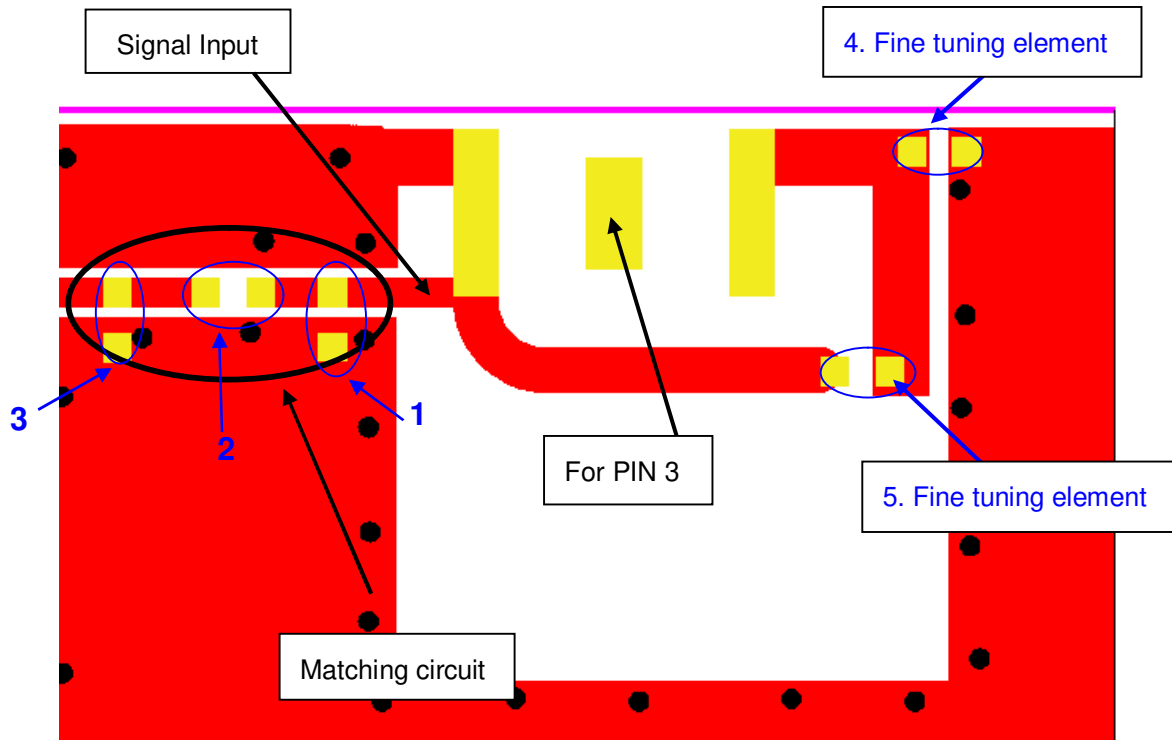

8-2. Matching circuit :

With the following recommended values of matching and tuning components, the center frequencies will be about 868 MHz at our standard 80x40 mm² evaluation board. However, these are typical reference values which may need to be changed when circuit boards or part vendors are different.

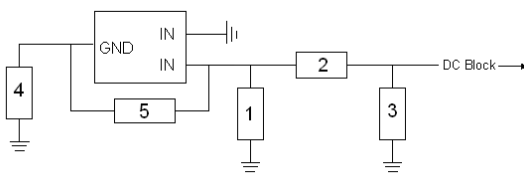

System Matching Circuit Component			
Location	Description	Vendor	Tolerance
1	N/A*	-	-
2	3.3nH, (0402)	MURATA	±0.1nH
3	0.2 pF, (0402)	MURATA	±0.05pF
4	Fine tuning element 18 pF, (0402)	MURATA	±2%
5	Fine tuning element 1 pF, (0402)	MURATA	±0.05 pF



詠業科技股份有限公司
Unictron Technologies Corporation
Website: www.unictron.com

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

Prepared by : Xenia

Designed by : Phillip

Checked by : Mike

Approved by : Herbert

TITLE : ISM 868 MHz Ceramic Chip Antenna (AA701) with Evaluation Board Engineering Specification



DOCUMENT NO.

H2B1SG1A1S0300

REV.

A

8-3. Reference for frequency tuning element

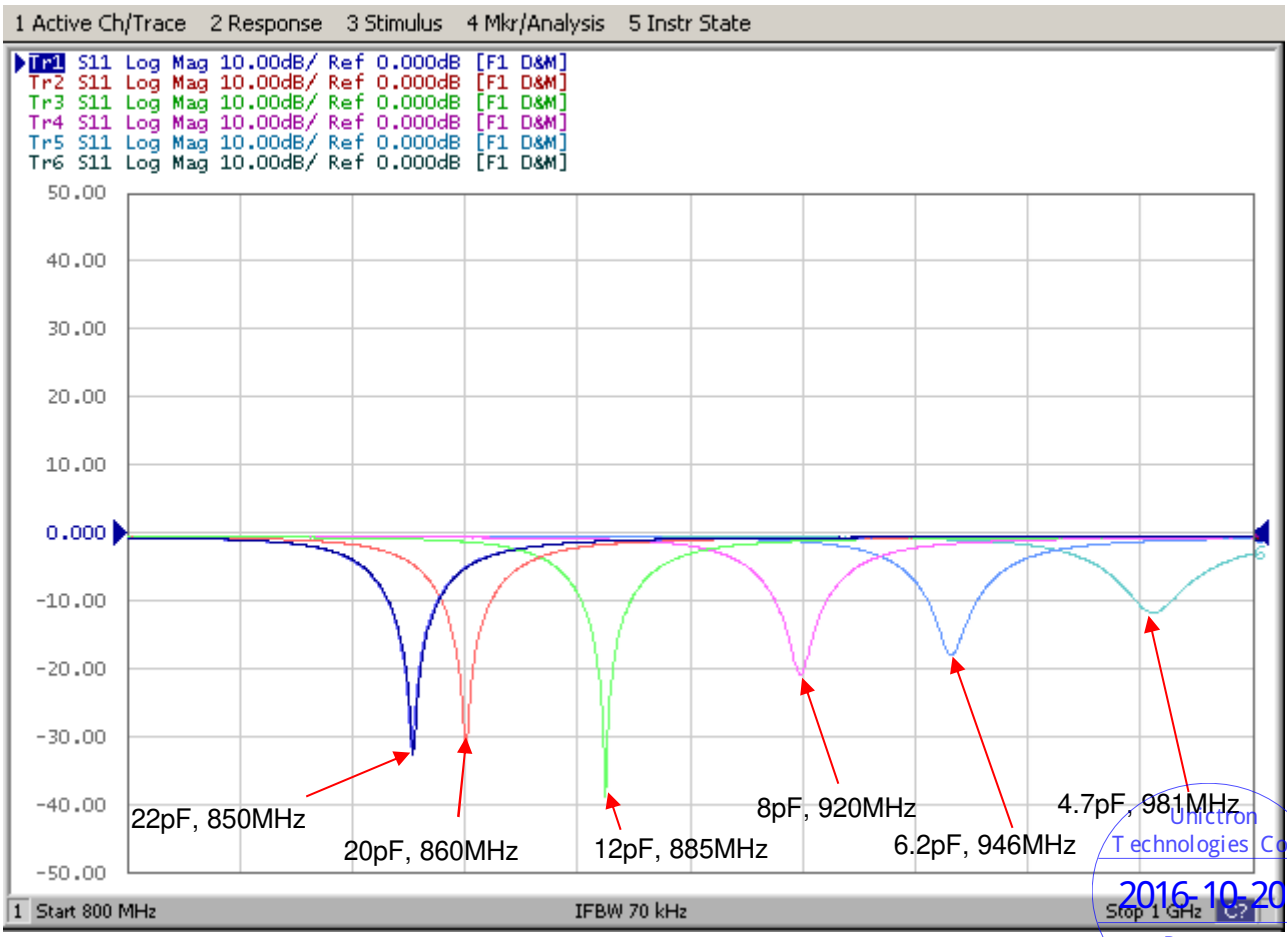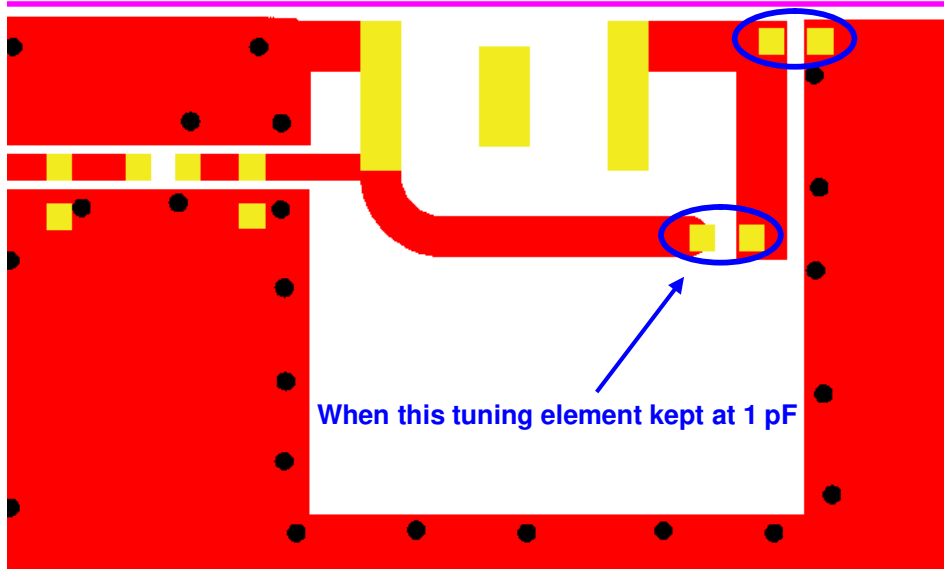

Unictron Technologies Corp.
2016-10-20
Document Control Center



詠業科技股份有限公司
Unictron Technologies Corporation
Website: www.unictron.com

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

Prepared by : Xenia

Designed by : Phillip

Checked by : Mike

Approved by : Herbert

TITLE : ISM 868 MHz Ceramic Chip Antenna (AA701) with Evaluation Board Engineering Specification

DOCUMENT NO.

H2B1SG1A1S0300

REV. A

9. Reminders for users of Unictron's AA701 ceramic chip antennas

- 9-1. This chip antenna is made of ceramic materials which are relatively more rigid and brittle compared to printed circuit board materials. Bending of circuit board at the locations where chip antenna is mounted may cause the cracking of solder joints or antenna itself.
- 9-2. Punching/cutting of the break-off tab of PCB panel may cause severe bending of the circuit board which may result in cracking of solder joints or chip antenna itself. Therefore break-off tab shall be located away from the installation site of chip antenna.
- 9-3. Be cautious when ultrasonic welding process needs to be used near the locations where chip antennas are installed. Strong ultrasonic vibration may cause the cracking of chip antenna solder joints.

10. Operating & Storage Conditions

10-1. Operating

- (1) Maximum Input Power: 2 W
- (2) Operating Temperature: -40°C to 85°C

10-2. Storage

- (1) Storage Temperature: -5°C to 40°C
- (2) Relative Humidity: 20% to 70%
- (3) Shelf Life: 1 year

11. Notice

All specifications are subject to change without notice.



詠業科技股份有限公司
Unictron Technologies Corporation
Website: www.unictron.com

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

Prepared by : **Xenia**

Designed by : **Phillip**

Checked by : **Mike**

Approved by : **Herbert**

TITLE : ISM 868 MHz Ceramic Chip Antenna (AA701) with Evaluation Board Engineering Specification

DOCUMENT NO.

H2B1SG1A1S0300

REV. A