



# TAOGLAS®



# Datasheet

## Guardian 6in1 Adhesive Mount Antenna

**Part No:**  
MA931.W.A.LBICGH.001

### Description:

Guardian 6in1 Adhesive Mount Antenna LTE\*2+Wi-Fi\*3+GNSS

### Features:

Low-profile Housing – Mounts flush to Wall

2\* LTE MIMO 698--3600MHz

3\* Wi-Fi MIMO 2.4GHz/5.8GHz

1\* GPS-GLONASS-GALILEO-BeiDou Antenna

Worldwide 4G Bands including 3G and 2G

IP67 Waterproof Enclosure

Dims: 146\*134\*20mm

1M Low Loss TGC-200 and RG174 with SMA(M)/RP-SMA(M) connectors

Cables and Connectors Customizable

RoHS & REACH Compliant

Also available in Black

1.	Introduction	3
2.	Specifications	4
3.	Antenna Characteristics	10
4.	Mechanical Drawing	93
5.	Packaging	94
	Changelog	95

Taoglas makes no warranties based on the accuracy or completeness of the contents of this document and reserves the right to make changes to specifications and product descriptions at any time without notice. Taoglas reserves all rights to this document and the information contained herein.

Reproduction, use or disclosure to third parties without express permission is strictly prohibited.



# 1. Introduction



The MA931 Guardian is a next generation combination antenna. The first panel antenna worldwide designed for IoT Gateway and Router devices. It is a low profile 6in1 wall and adhesive mount antenna. It is a heavy-duty, fully IP67 waterproof external M2M antenna for use by RF professionals in IoT Gateway and Routers, HD Video Streaming, Transportation and Remote Monitoring Applications.

This antenna delivers powerful MIMO antenna technology for worldwide 4G LTE bands at 698-3600MHz, dual-band 2.4/5.8GHz Wi-Fi, plus GPS-GLONASS-GALILEO-BeiDou for location accuracy. It enables designers to cover a wide range of technologies by installing a single antenna.

4G wireless applications demand high speed data uplink and downlink. High efficiency and high gain MIMO antennas are necessary to achieve the required signal to noise ratio and throughput required to solve these challenges. Taoglas also takes care to have high isolation among these antennas to prevent self-interference. Low loss cables used to keep efficiency high over long cable lengths.

The GPS-GLONASS-GALILEO-BeiDou active antenna has been carefully designed for excellent performance across all GNSS bands, leading to higher location accuracy and stability of tracking in urban environments.

The housing is IP67 waterproof and comes with a 3M foam adhesive. The antenna can be mounted internally or externally on a vehicle. The MA931 comes with 1 meter, low loss TGC-200 cables for the LTE and Wi-Fi antennas, and RG174 coaxial cable for the GNSS antenna as standard. Customized cables and connector versions are also available.

## 2. Specifications

### GPS-GLONASS-GALILEO-BeiDou

Center Frequency	GPS/GALILEO:1575.42±1.023MHz GLONASS:1602±5MHz BeiDou:1561.098±2.046MHz
Passive Antenna Efficiency (without cable loss)	GPS/GALILEO: 48% GLONASS: 57% BeiDou: 63%
Passive Antenna Average Gain (without cable loss)	GPS/GALILEO: -3.13dBi GLONASS: -2.39dBi BeiDou: -1.97dBi
Passive Antenna Peak Gain (without cable loss)	GPS/GALILEO: 1.98dBi GLONASS: 3.01dBi BeiDou: 3dBi
VSWR	3:1 Max
Impedance	50Ω
Axial Ratio	GPS/GALILEO:<14.02 GLONASS:<5.9 BeiDou:<9.7
Polarization	RHCP
Cable	1 meter RG174 standard, fully customizable
Connector	SMA(M) standard, fully customizable

### LNA and Filter Electrical Properties

Center Frequency	GPS/GALILEO:1575.42±1.023MHz GLONASS:1602±5MHz BeiDou: 1561.098±2.046MHz			
Output Impedance	50Ω			
VSWR	< 2:1			
Return Loss	10dB Min.			
LNA Gain, Current Draw, and Noise Figure@GPS	Voltage	LNA Gain(Typ)	Current Draw(mA) Typ	Noise Figure(Typ)
	Min 1.8V	28dB	7.9mA	1.13dB
	Typ 3.0V	30dB	9.0mA	1.13dB
	Max 5.5V	33dB	9.9mA	1.14dB

### Total Specification (Through Antenna, SAW Filter, and LNA)

Frequency	1561.098±2.046MHz	1575.42±1.023MHz	1602±5MHz
Gain@3V	1561MHz:28±3dBi	1575.42MHz:28±3dBi	1602MHz:28±3dBi
Output Impedance	50Ω		

4G/3G/2G LTE Antenna									
Frequency (MHz)	LTE700	GSM850	GSM900	DCS	PCS	UMTS1	LTE2600	LTE3500	
	698~803	824~894	880~960	1710 ~1880	1850 ~1990	1920 ~2170	2490 ~2690	3300 ~3600	
Efficiency (%)									
MIMO_1	Free space	50.82	55.85	41.29	66.47	70.19	71.51	49.20	50.92
	ABS	68.31	69.61	61.27	66.31	70.86	70.00	50.61	51.88
	Glass	67.99	67.37	62.94	66.89	71.80	69.58	51.00	52.83
	Metal	42.12	51.55	58.33	39.49	47.20	47.71	44.36	44.85
	Wall	67.97	70.42	66.80	63.91	64.94	63.35	50.37	51.49
MIMO_2	Free space	54.13	58.97	48.65	61.54	68.31	68.39	54.62	52.55
	ABS	71.74	66.05	58.58	63.18	69.29	69.23	53.95	54.95
	Glass	64.53	55.70	45.22	64.94	67.87	65.86	50.05	51.77
	Metal	55.62	63.13	56.59	32.14	40.89	43.97	54.22	52.90
	Wall	61.91	48.38	52.88	58.00	56.47	56.36	54.68	48.72
Average Gain (dBi)									
MIMO_1	Free space	-2.96	-2.62	-3.85	-1.78	-1.54	-1.46	-3.12	-2.96
	ABS	-1.68	-1.59	-2.13	-1.79	-1.50	-1.55	-3.00	-2.87
	Glass	-1.73	-1.73	-2.02	-1.75	-1.44	-1.58	-2.96	-2.79
	Metal	-3.94	-2.88	-2.37	-4.07	-3.27	-3.23	-3.57	-3.51
	Wall	-1.70	-1.53	-1.76	-1.95	-1.88	-1.99	-3.00	-2.89
MIMO_2	Free space	-2.72	-2.32	-3.17	-2.11	-1.66	-1.66	-2.65	-2.83
	ABS	-1.47	-1.81	-2.33	-2.00	-1.59	-1.60	-2.71	-2.63
	Glass	-1.93	-2.56	-3.46	-1.88	-1.68	-1.82	-3.04	-2.87
	Metal	-2.61	-2.00	-2.50	-4.95	-3.90	-3.59	-2.67	-2.77
	Wall	-2.09	-3.15	-2.79	-2.37	-2.48	-2.50	-2.63	-3.15
Peak Gain (dBi)									
MIMO_1	Free space	3.18	3.60	2.14	3.98	4.37	4.37	3.70	4.49
	ABS	4.65	4.00	3.45	5.24	6.05	6.05	4.69	3.18
	Glass	3.71	3.92	4.35	5.28	6.16	7.67	5.34	3.87
	Metal	5.09	3.10	4.73	4.50	4.96	5.69	6.02	4.96
	Wall	4.74	4.97	3.67	5.44	4.84	4.84	5.08	3.75
MIMO_2	Free space	5.83	3.66	2.57	3.78	4.01	4.01	3.87	3.97
	ABS	4.33	4.52	4.41	4.34	4.73	5.69	5.64	5.42
	Glass	3.02	3.14	1.36	4.99	5.89	6.02	6.18	4.42
	Metal	3.54	3.11	3.33	3.12	4.36	5.02	7.16	4.95
	Wall	3.21	1.77	2.15	5.49	5.49	7.20	6.10	4.74
Impedance			50Ω						
Polarization			Linear						
VSWR			< 3						
Cable			1 meter TGC-200 standard, fully customizable						
Connector			SMA(M) standard, fully customizable						

2.4GHz/5.8GHz Wi-Fi Antenna			
Frequency (MHz)		2400~2500	4900~5850
<b>Efficiency (%)</b>			
MIMO_1	Free space	57.73	48.06
	ABS	53.59	49.42
	Glass	53.98	47.16
	Metal	51.80	46.70
	Wall	61.02	46.29
MIMO_2	Free space	44.09	47.04
	ABS	46.34	46.79
	Glass	40.79	46.88
	Metal	45.58	45.59
	Wall	50.62	43.60
MIMO_3	Free space	68.05	54.35
<b>Average Gain (dBi)</b>			
MIMO_1	Free space	-2.39	-3.25
	ABS	-2.71	-3.13
	Glass	-2.68	-3.36
	Metal	-2.86	-3.44
	Wall	-2.15	-3.42
MIMO_2	Free space	-3.57	-3.33
	ABS	-3.37	-3.36
	Glass	-3.91	-3.35
	Metal	-3.45	-3.52
	Wall	-2.96	-3.67
MIMO_3	Free space	-1.67	-2.66
<b>Peak Gain (dBi)</b>			
MIMO_1	Free space	4.35	4.84
	ABS	5.34	5.18
	Glass	2.99	5.03
	Metal	5.22	5.98
	Wall	5.47	5.77
MIMO_2	Free space	2.94	5.70
	ABS	2.18	5.43
	Glass	3.75	7.07
	Metal	6.02	6.76
	Wall	3.23	5.97
MIMO_3	Free space	6.3	4.06
Impedance	50Ω		
Polarization	Linear		
VSWR	< 3		
Cable	1 meter TGC-200 standard, fully customizable		
Connector	RP-SMA(M) standard, fully customizable		

MECHANICAL	
Antenna Dimensions	146*134*20mm
Casing	ASA
Weight (including cable)	438g
Ingress Protection Rating	IP67
ENVIRONMENTAL	
Operation Temperature	-40°C to 85°C
Storage Temperature	-40°C to 90°C
Humidity	Non-condensing 65°C 95% RH

## 2.1. LTE Bands Covered while on metal Ground Plane

LTE Bands				
Band Number	LTE / LTE-Advanced / WCDMA / HSPA / HSPA+ / TD-SCDMA			
	Uplink	Downlink	MIMO 1	MIMO 2
1	UL: 1920 to 1980	DL: 2110 to 2170	✓	✓
2	UL: 1850 to 1910	DL: 1930 to 1990	✓	✓
3	UL: 1710 to 1785	DL: 1805 to 1880	✓	✓
4	UL: 1710 to 1755	DL: 2110 to 2155	✓	✓
5	UL: 824 to 849	DL: 869 to 894	✓	✓
7	UL: 2500 to 2570	DL: 2620 to 2690	✓	✓
8	UL: 880 to 915	DL: 925 to 960	✓	✓
9	UL: 1749.9 to 1784.9	DL: 1844.9 to 1879.9	✓	✓
11	UL: 1427.9 to 1447.9	DL: 1475.9 to 1495.9	✗	✗
12	UL: 699 to 716	DL: 729 to 746	✓	✓
13	UL: 777 to 787	DL: 746 to 756	✓	✓
14	UL: 788 to 798	DL: 758 to 768	✓	✓
17	UL: 704 to 716	DL: 734 to 746 (LTE only)	✓	✓
18	UL: 815 to 830	DL: 860 to 875 (LTE only)	✓	✓
19	UL: 830 to 845	DL: 875 to 890	✓	✓
20	UL: 832 to 862	DL: 791 to 821	✓	✓
21	UL: 1447.9 to 1462.9	DL: 1495.9 to 1510.9	✗	✗
22	UL: 3410 to 3490	DL: 3510 to 3590	✓	✓
23	UL: 2000 to 2020	DL: 2180 to 2200 (LTE only)	✓	✓
24	UL: 1625.5 to 1660.5	DL: 1525 to 1559 (LTE only)	✓	✗
25	UL: 1850 to 1915	DL: 1930 to 1995	✓	✓
26	UL: 814 to 849	DL: 859 to 894	✓	✓
27	UL: 807 to 824	DL: 852 to 869 (LTE only)	✓	✓
28	UL: 703 to 748	DL: 758 to 803 (LTE only)	✓	✓
29	UL: -	DL: 717 to 728 (LTE only)	✓	✓
30	UL: 2305 to 2315	DL: 2350 to 2360 (LTE only)	✓	✓
31	UL: 452.5 to 457.5	DL: 462.5 to 467.5 (LTE only)	✗	✗
32	UL: -	DL: 1452 - 1496	✗	✗
35		1850 to 1910	✓	✓
38		2570 to 2620	✓	✓
39		1880 to 1920	✓	✓
40		2300 to 2400	✓	✓
41		2496 to 2690	✓	✓
42		3400 to 3600	✓	✓
43		3600 to 3800	✓	✓

\*Covered bands represent greater than 20% efficiency



## 2.2. LTE Bands Covered in Free Space


LTE Bands				
Band Number	LTE / LTE-Advanced / WCDMA / HSPA / HSPA+ / TD-SCDMA			
	Uplink	Downlink	MIMO 1	MIMO 2
1	UL: 1920 to 1980	DL: 2110 to 2170	✓	✓
2	UL: 1850 to 1910	DL: 1930 to 1990	✓	✓
3	UL: 1710 to 1785	DL: 1805 to 1880	✓	✓
4	UL: 1710 to 1755	DL: 2110 to 2155	✓	✓
5	UL: 824 to 849	DL: 869 to 894	✓	✓
7	UL: 2500 to 2570	DL: 2620 to 2690	✓	✓
8	UL: 880 to 915	DL: 925 to 960	✓	✓
9	UL: 1749.9 to 1784.9	DL: 1844.9 to 1879.9	✓	✓
11	UL: 1427.9 to 1447.9	DL: 1475.9 to 1495.9	✗	✗
12	UL: 699 to 716	DL: 729 to 746	✓	✓
13	UL: 777 to 787	DL: 746 to 756	✓	✓
14	UL: 788 to 798	DL: 758 to 768	✓	✓
17	UL: 704 to 716	DL: 734 to 746 (LTE only)	✓	✓
18	UL: 815 to 830	DL: 860 to 875 (LTE only)	✓	✓
19	UL: 830 to 845	DL: 875 to 890	✓	✓
20	UL: 832 to 862	DL: 791 to 821	✓	✓
21	UL: 1447.9 to 1462.9	DL: 1495.9 to 1510.9	✗	✗
22	UL: 3410 to 3490	DL: 3510 to 3590	✓	✓
23	UL: 2000 to 2020	DL: 2180 to 2200 (LTE only)	✓	✓
24	UL: 1625.5 to 1660.5	DL: 1525 to 1559 (LTE only)	✓	✓
25	UL: 1850 to 1915	DL: 1930 to 1995	✓	✓
26	UL: 814 to 849	DL: 859 to 894	✓	✓
27	UL: 807 to 824	DL: 852 to 869 (LTE only)	✓	✓
28	UL: 703 to 748	DL: 758 to 803 (LTE only)	✓	✓
29	UL: -	DL: 717 to 728 (LTE only)	✓	✓
30	UL: 2305 to 2315	DL: 2350 to 2360 (LTE only)	✓	✓
31	UL: 452.5 to 457.5	DL: 462.5 to 467.5 (LTE only)	✗	✗
32	UL: -	DL: 1452 - 1496	✓	✓
35		1850 to 1910	✓	✓
38		2570 to 2620	✓	✓
39		1880 to 1920	✓	✓
40		2300 to 2400	✓	✓
41		2496 to 2690	✓	✓
42		3400 to 3600	✓	✓
43		3600 to 3800	✓	✓

\*Covered bands represent an efficiency greater than 20%

### 3. Antenna Characteristics

#### 3.1 GPS-GLONASS-GALILEOBeiDou


##### 3.1.1 Block Diagram (Active antenna)

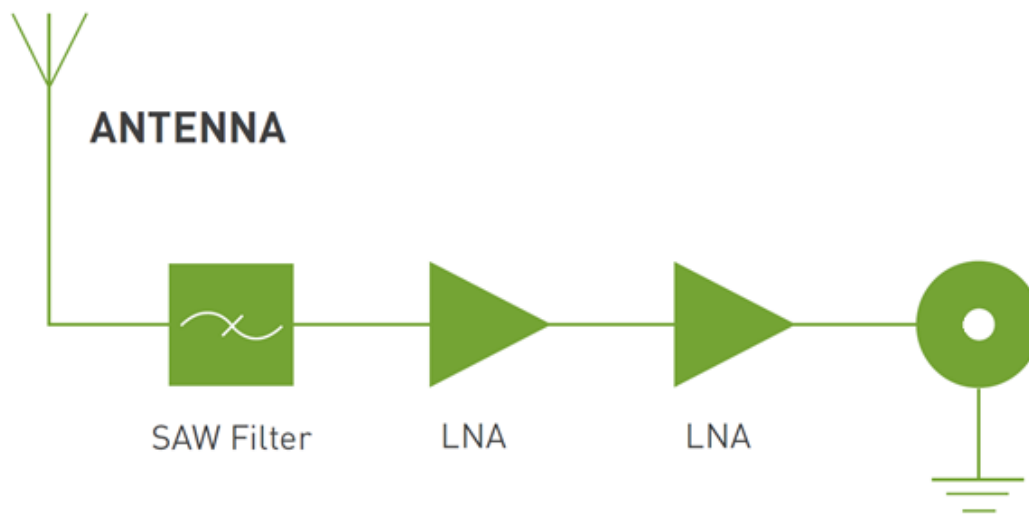


##### 3.1.2 Test Setup




### 3.1.3 GPS-GLONASS-GALILEO-BeiDou Return Loss (Passive antenna)

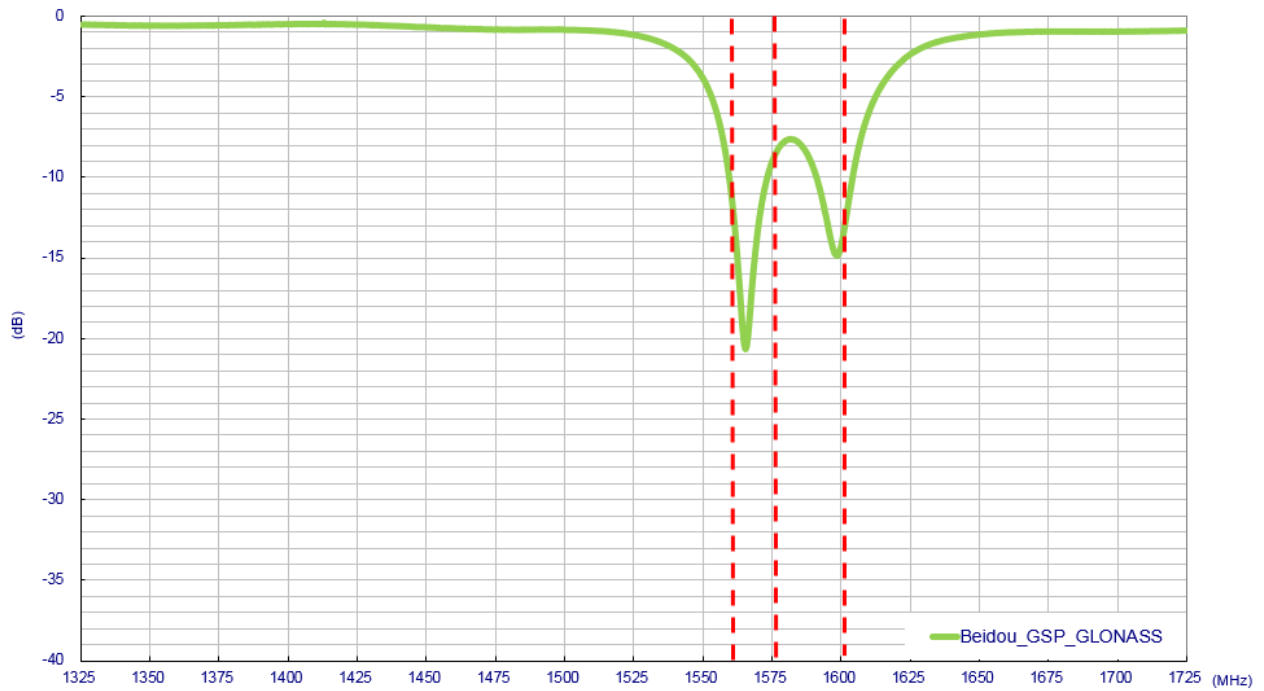


### 3.1.4 GPS-GLONASS-GALILEO-BeiDou Smith Chart (Passive antenna)

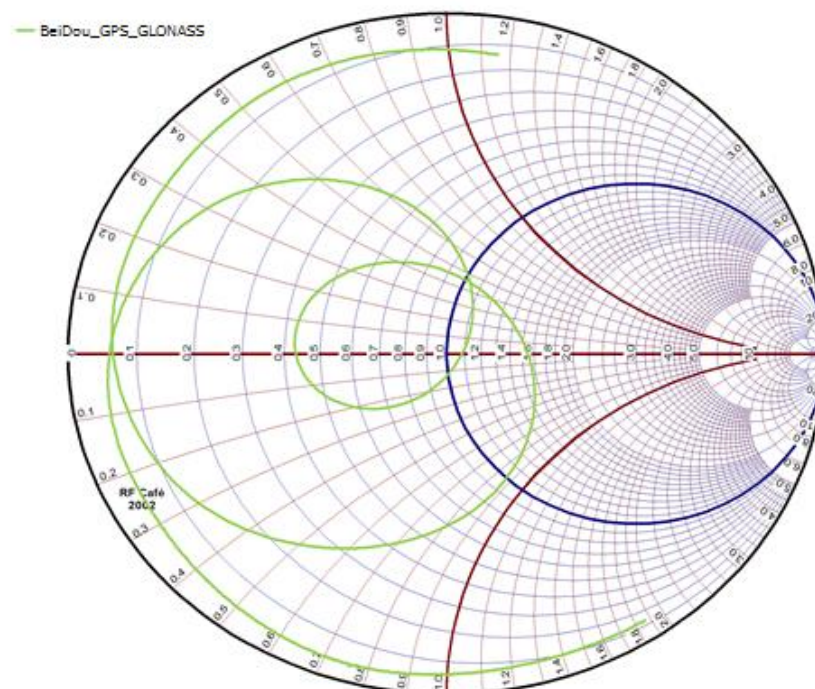


### 3.1.5 GPS-GLONASS-GALILEO-BeiDou Efficiency (Passive antenna)

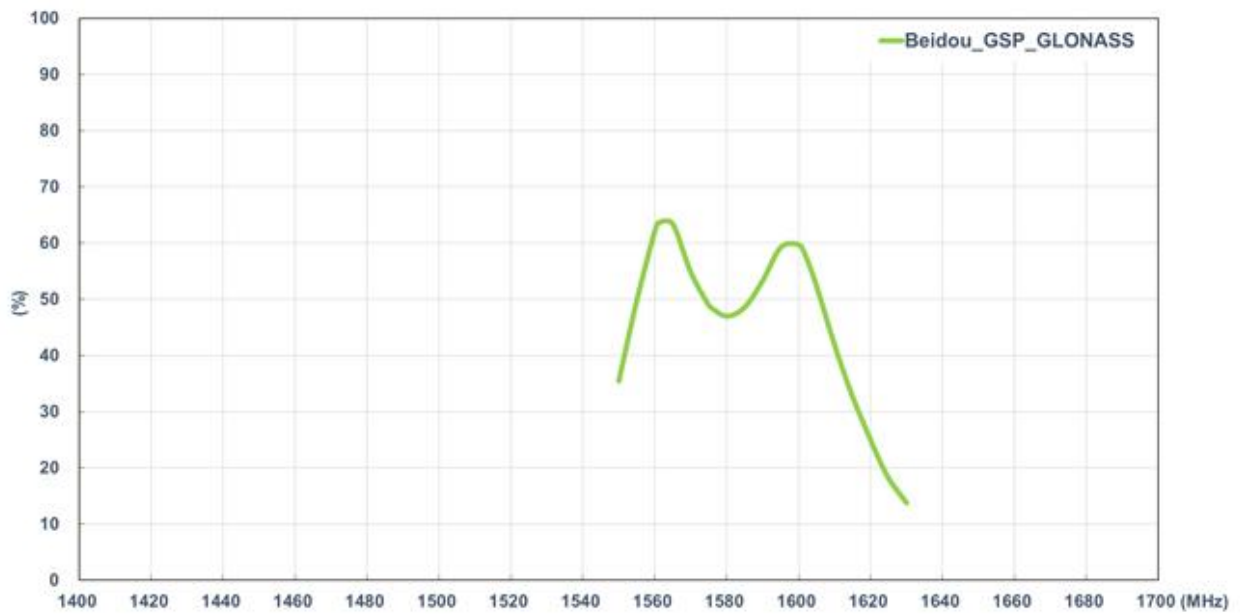




### 3.1.6 GLONASS-GALILEO-BeiDou Peak Gain (Passive antenna)

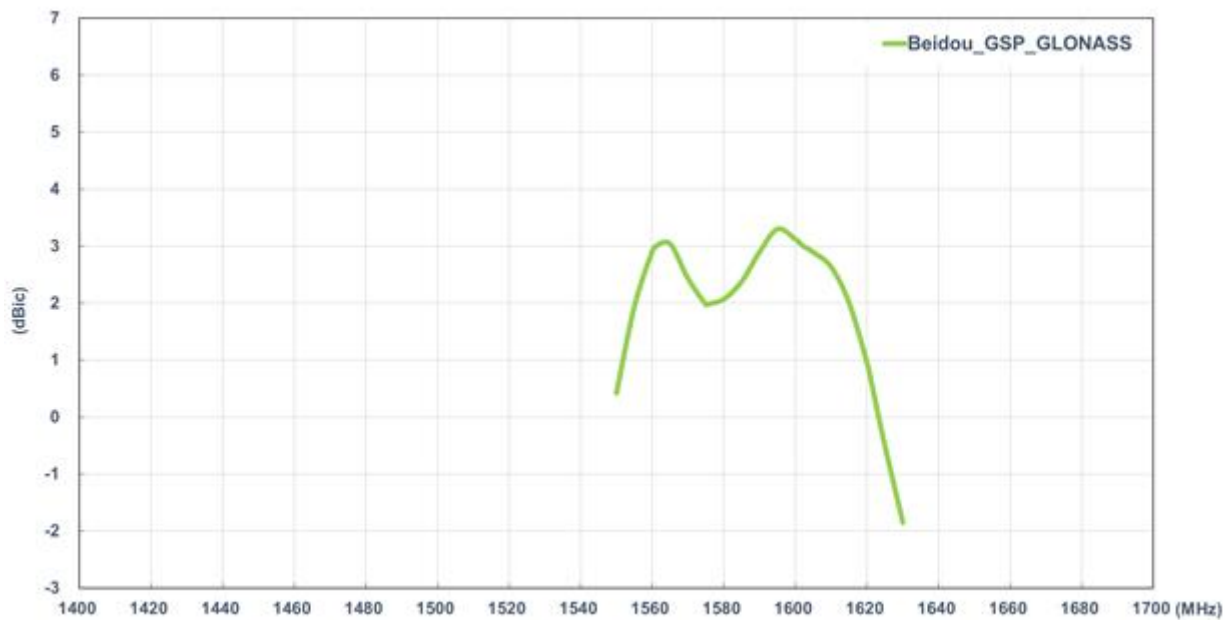


**3.1.7** GPS-GLONASS-GAILEO-BeiDou Average Gain (Passive antenna)

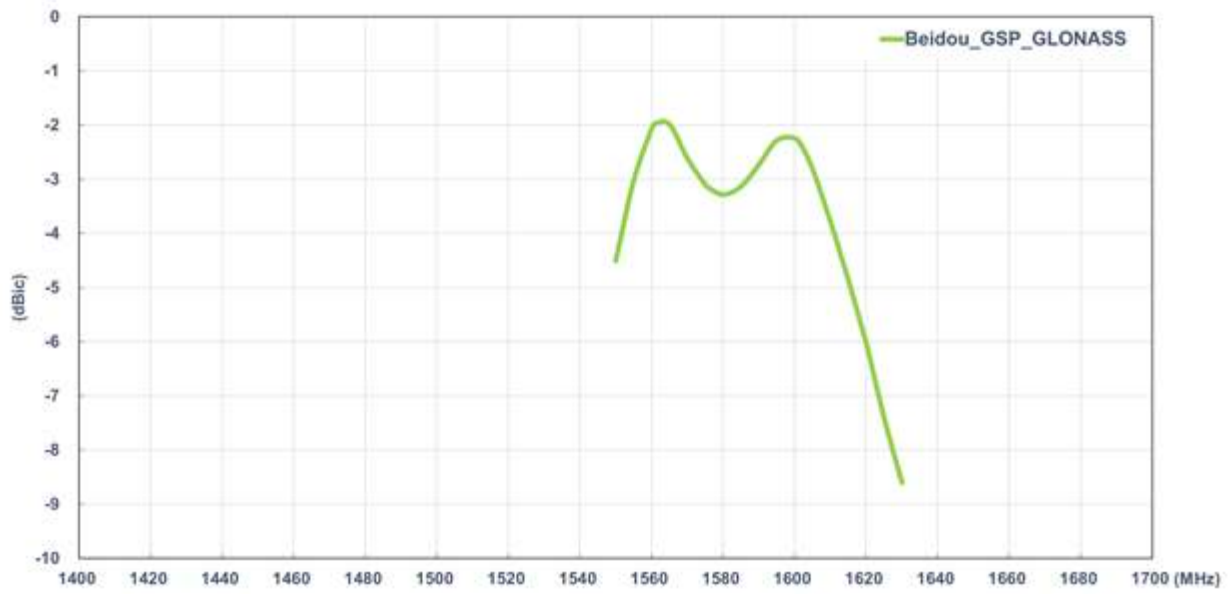


### 3.1.8 GLONASS-GALILEO-BeiDou Radiation Pattern (Passive antenna)

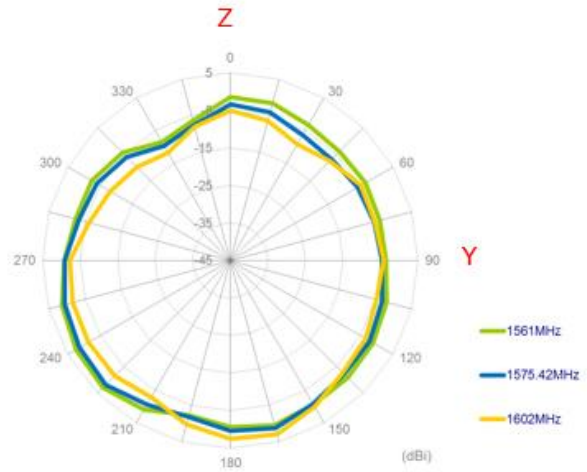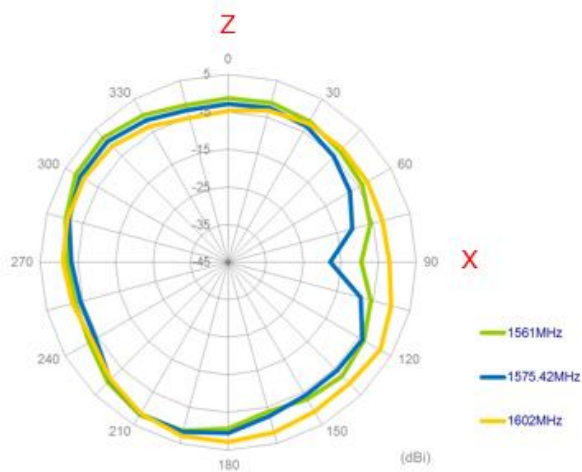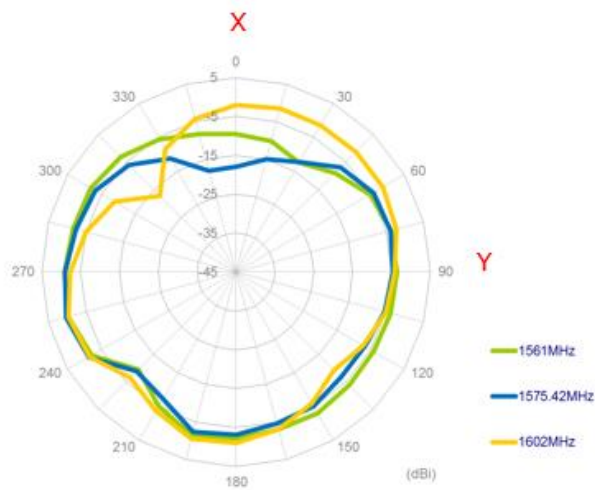


3.1.9 3D Radiation Pattern (Passive antenna)

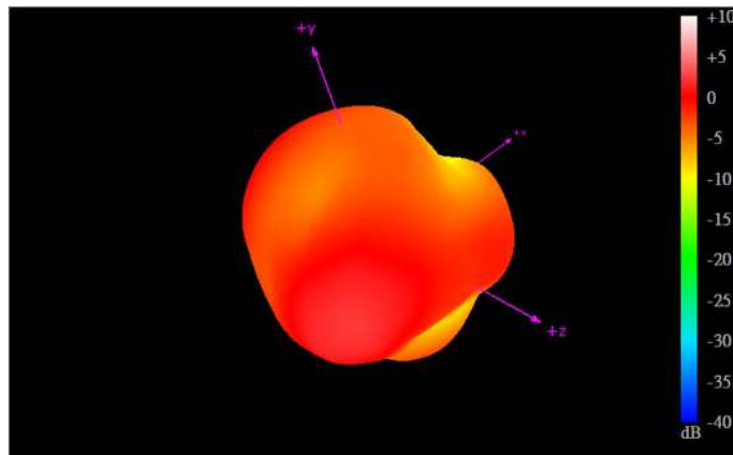

1561MHz

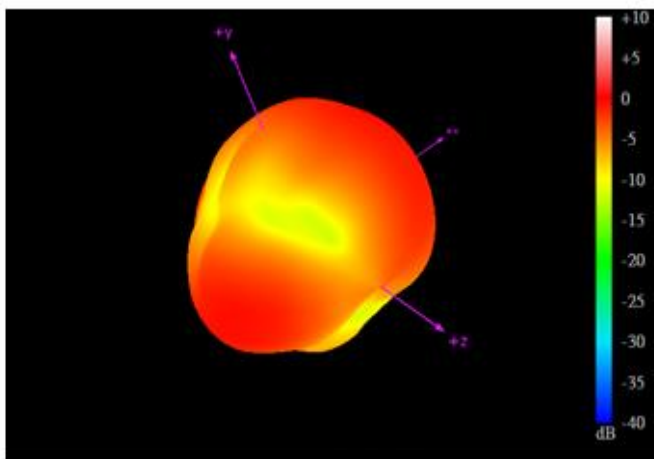


1575.42MHz

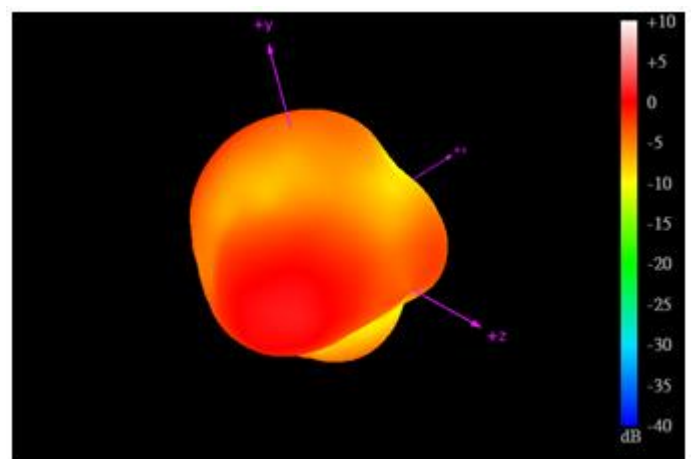


1602MHz


3.1.10 Axial Ratio (Passive antenna)

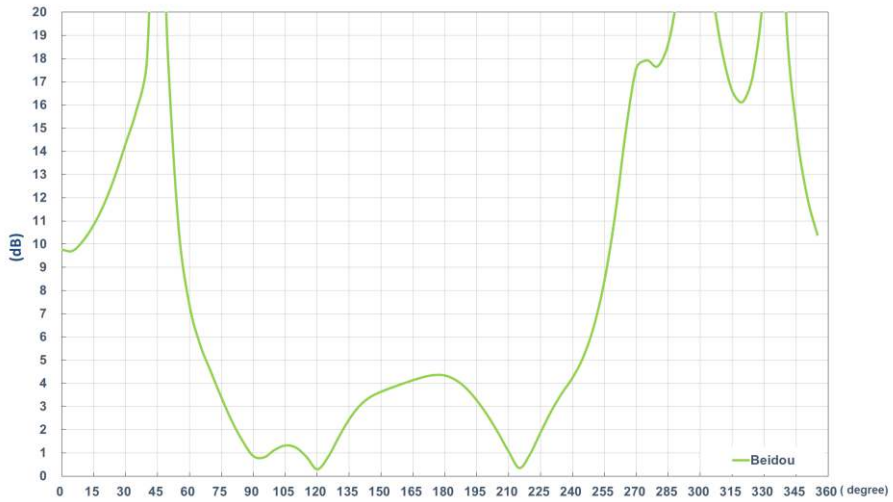

1561MHz

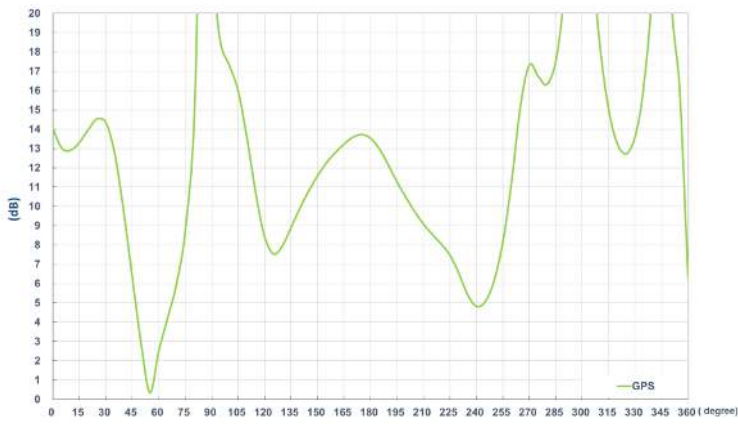


1575.42MHz

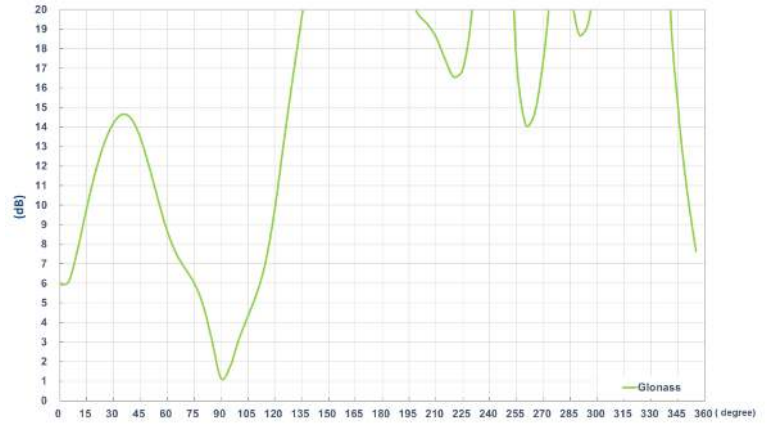


1602MHz



### 3.1.11 GPS-GLONASS-GALILEO-BeiDou LNA Gain and Noise Figure (Active antenna)

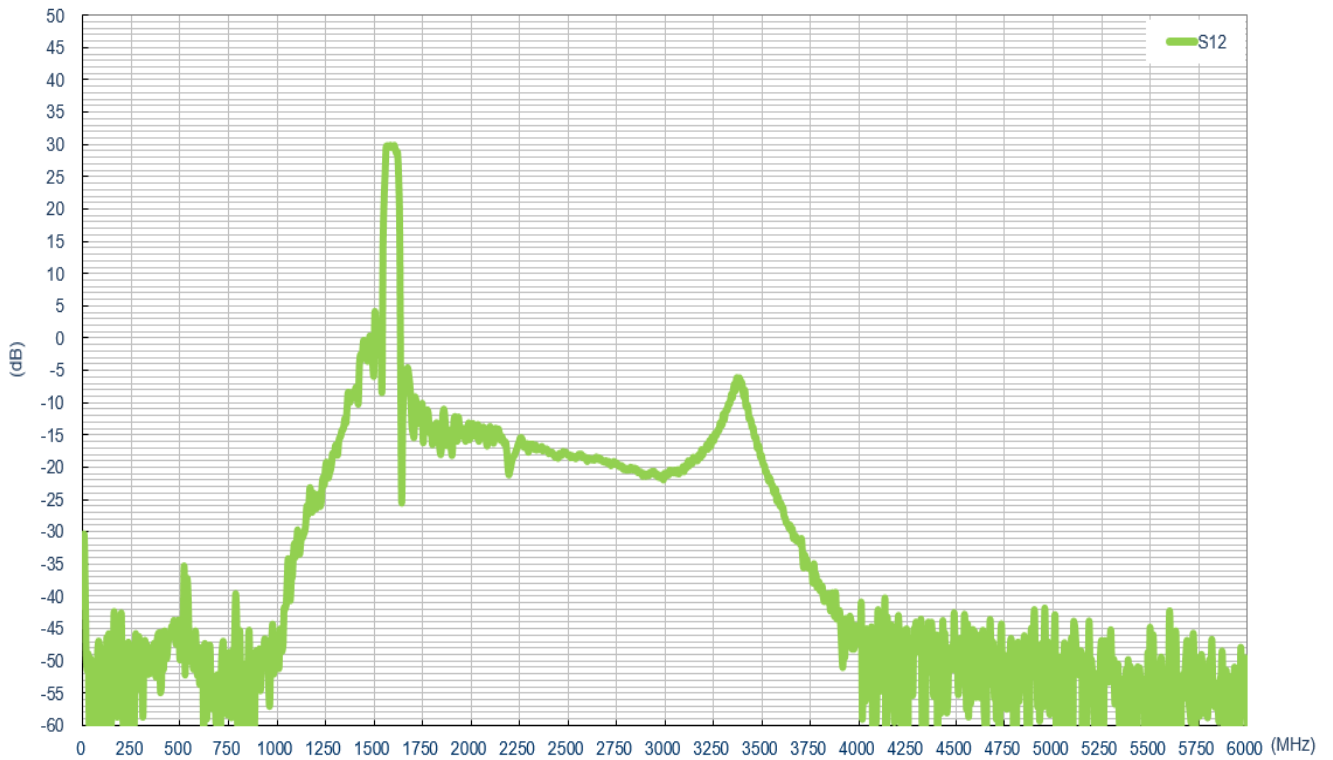


LNA Gain@3.0V

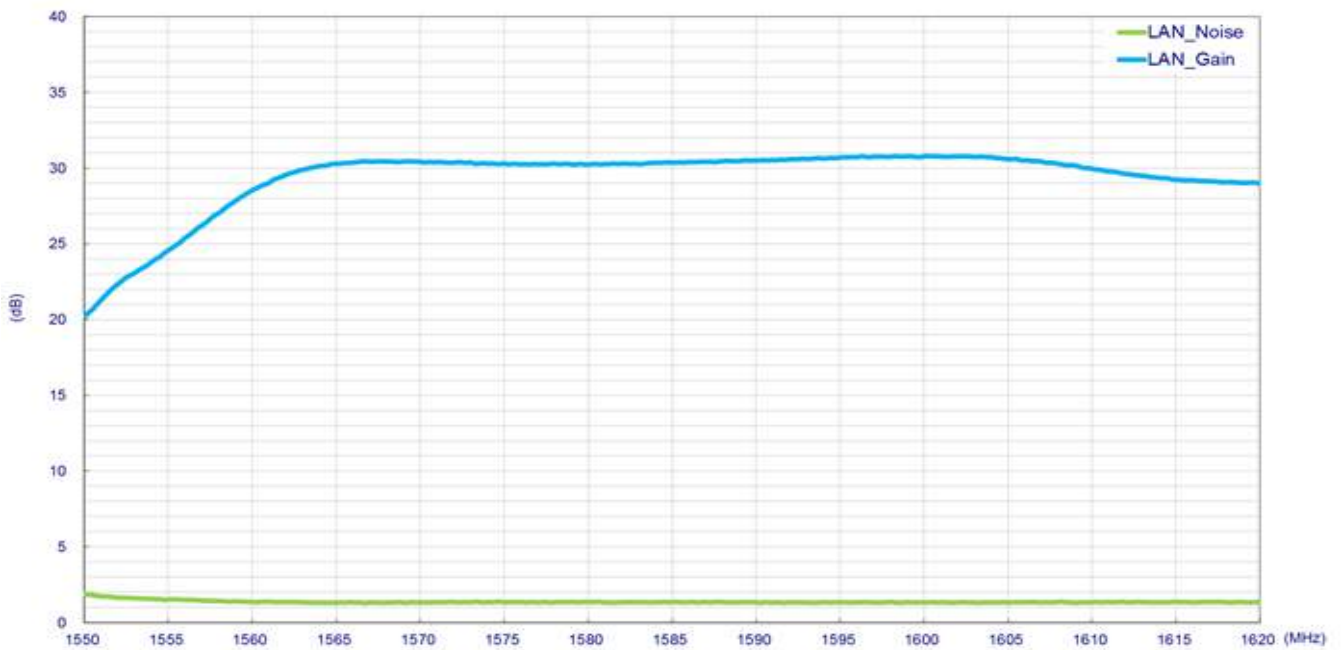


LNA Noise Figure @3.0V

### 3.2 LTE\_MIMO/Wi-Fi\_MIMO Antenna


#### 3.2.1 Test Setup

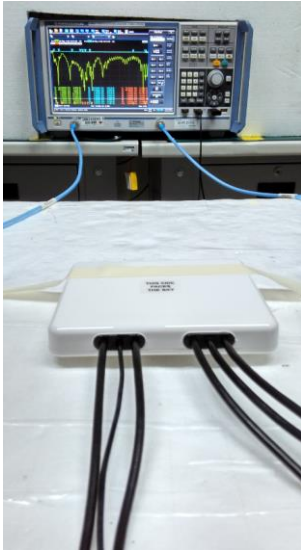


Free space

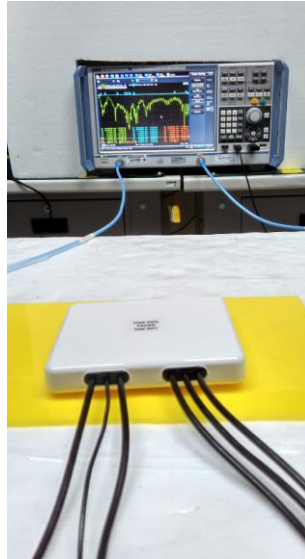

ABS

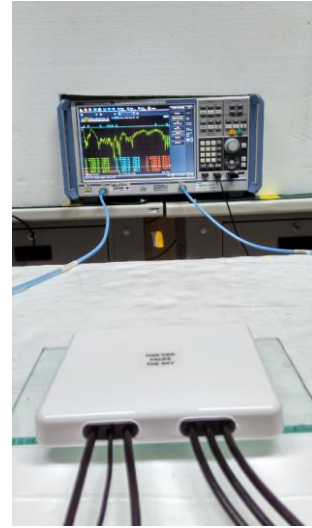

Glass

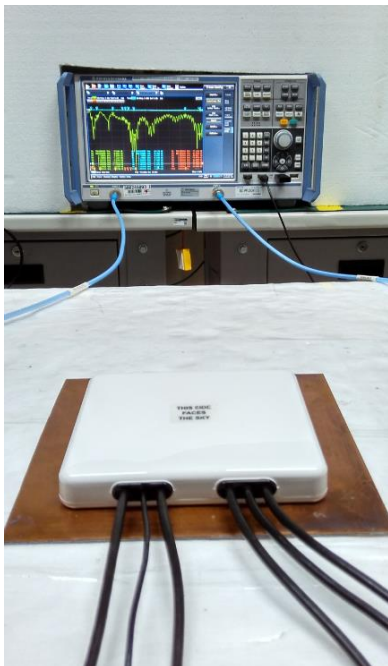


Metal




Wall

### 3.2.2 LTE\_1 Antenna Return Loss

Performance in different environments with 1 meter cable length

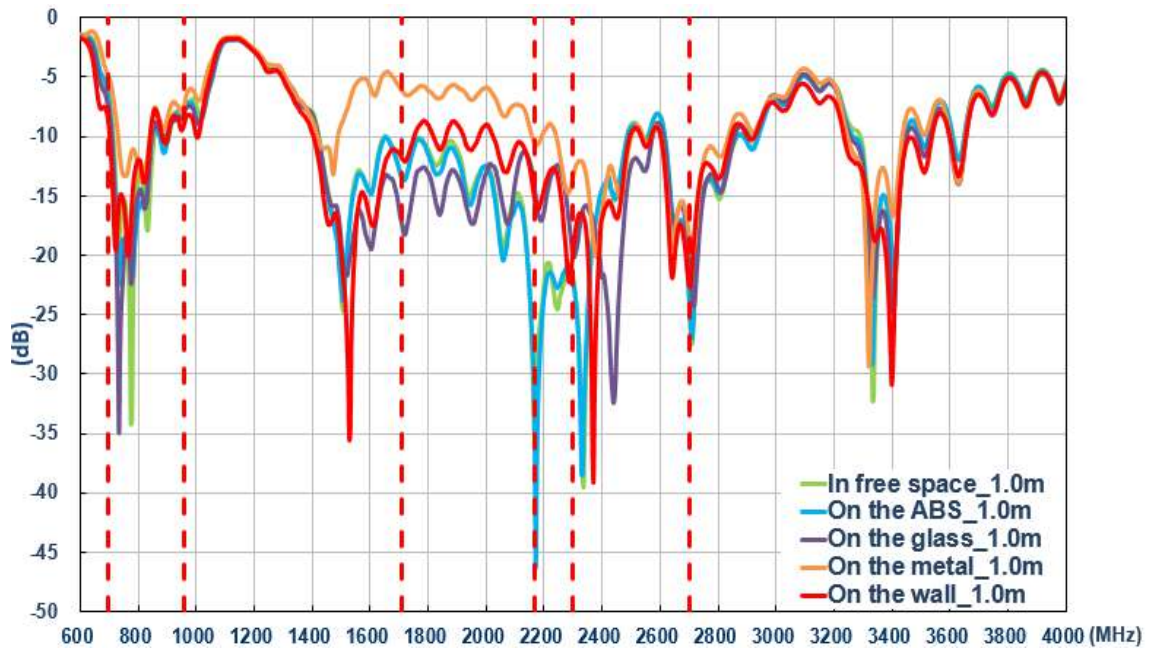


### 3.2.3 LTE\_2 Antenna Return Loss

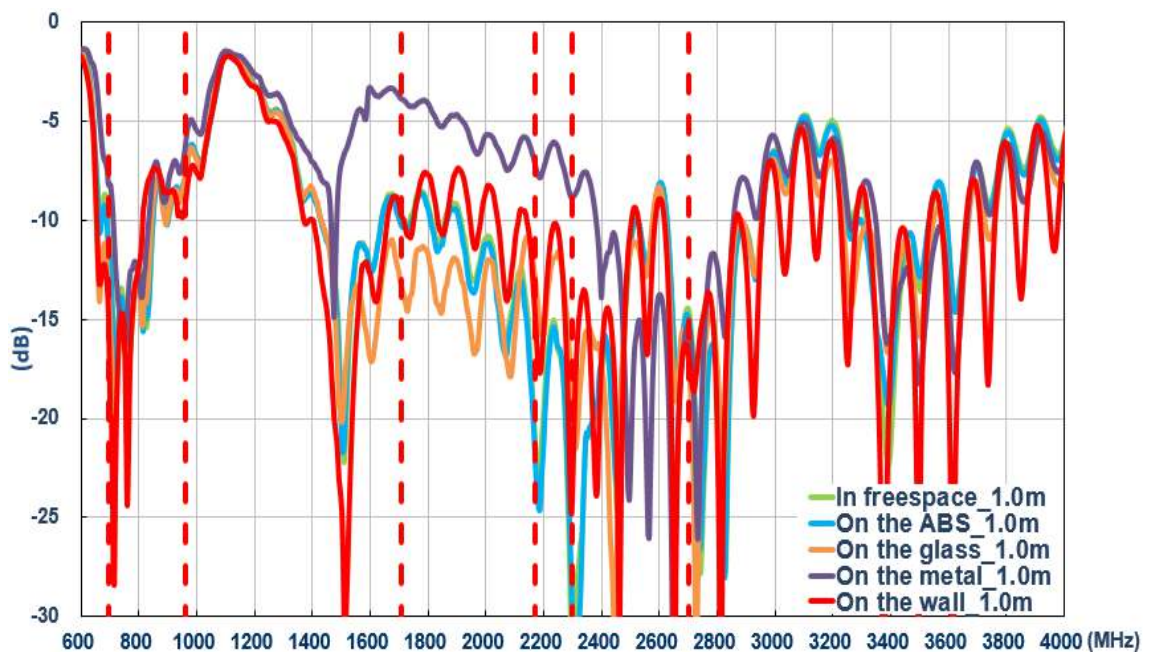


### 3.2.4 LTE Envelope Correlation Coefficient

Performance in different environments with 1 meter cable length

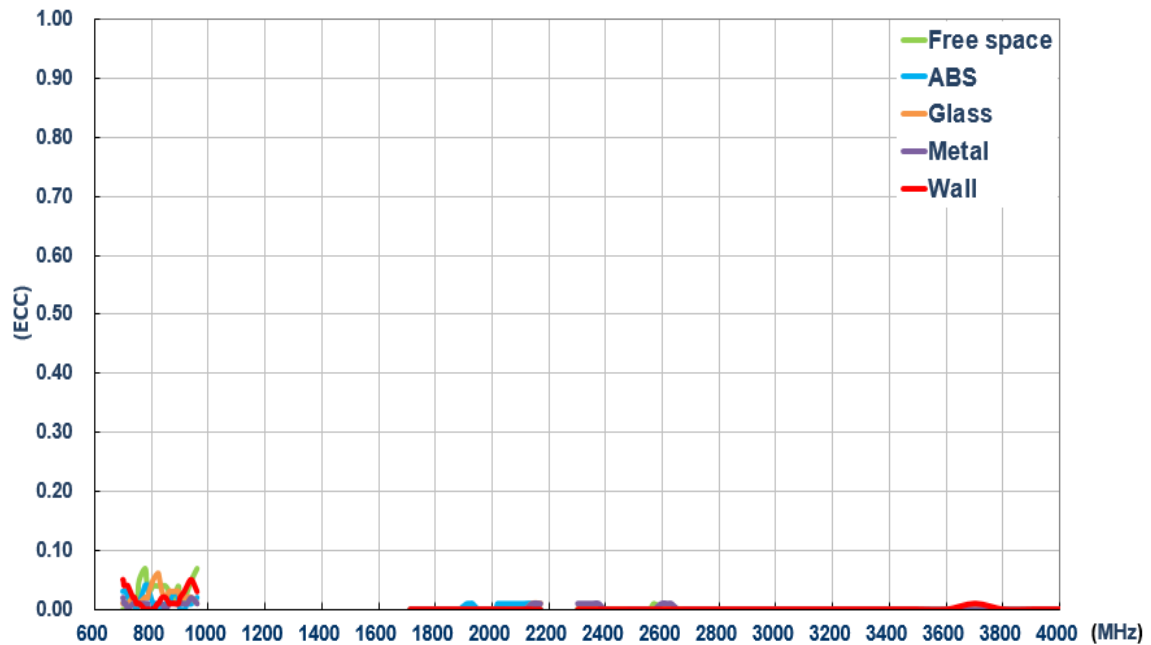


### 3.2.5 LTE\_1 Antenna Efficiency

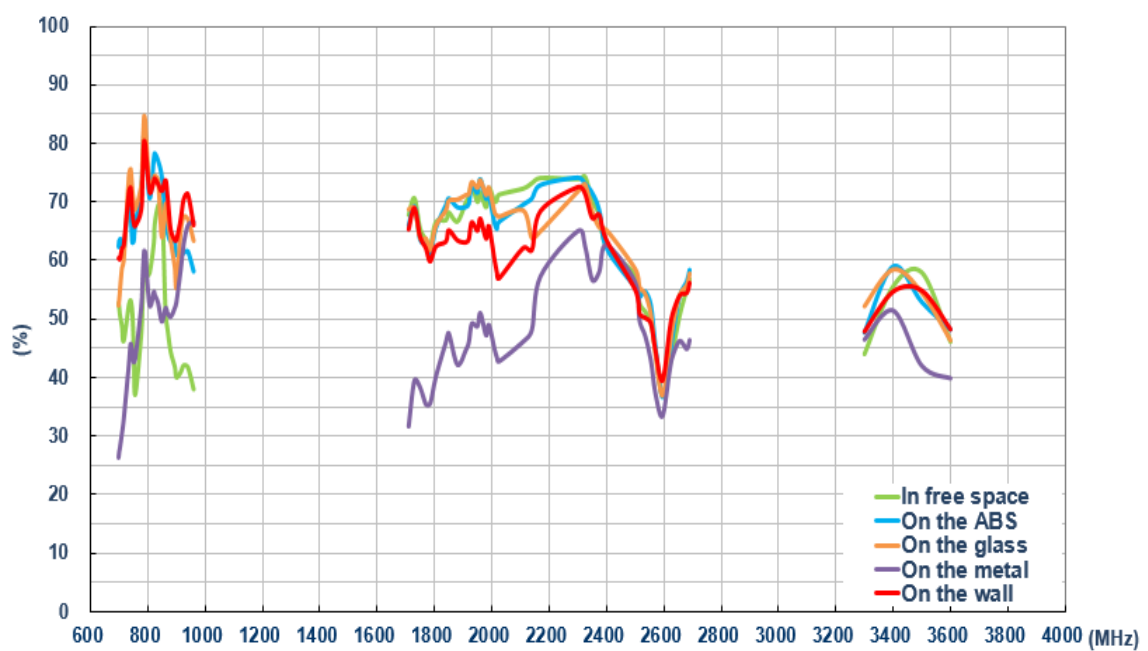


### 3.2.6 LTE\_2 Antenna Efficiency

Performance in different environments with 1 meter cable length

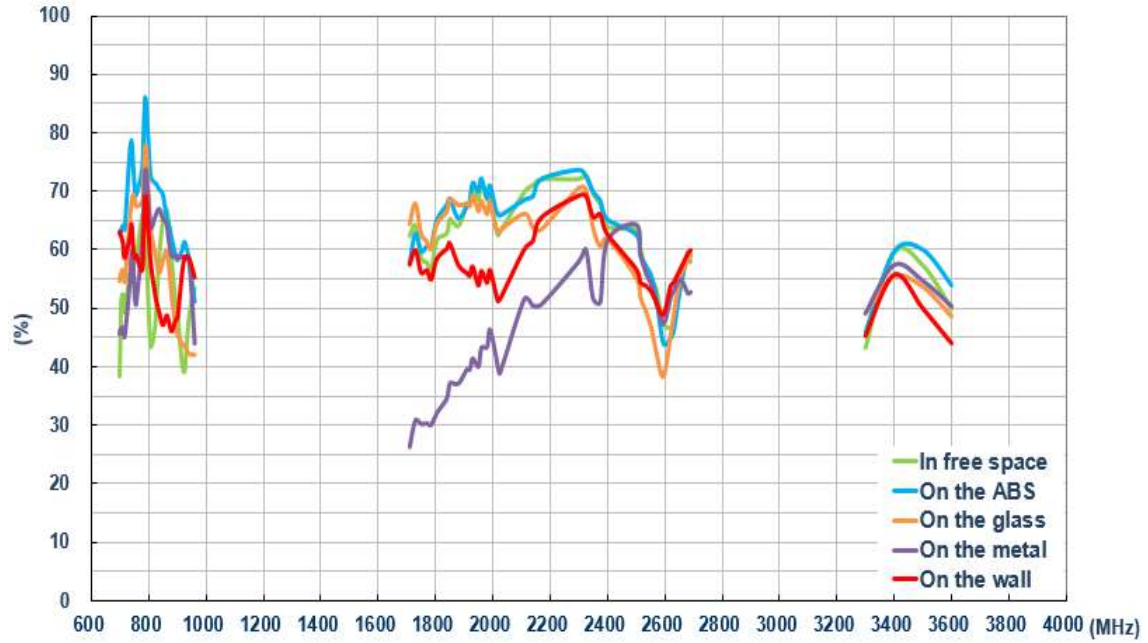


### 3.2.7 LTE\_1 Antenna Average Gain

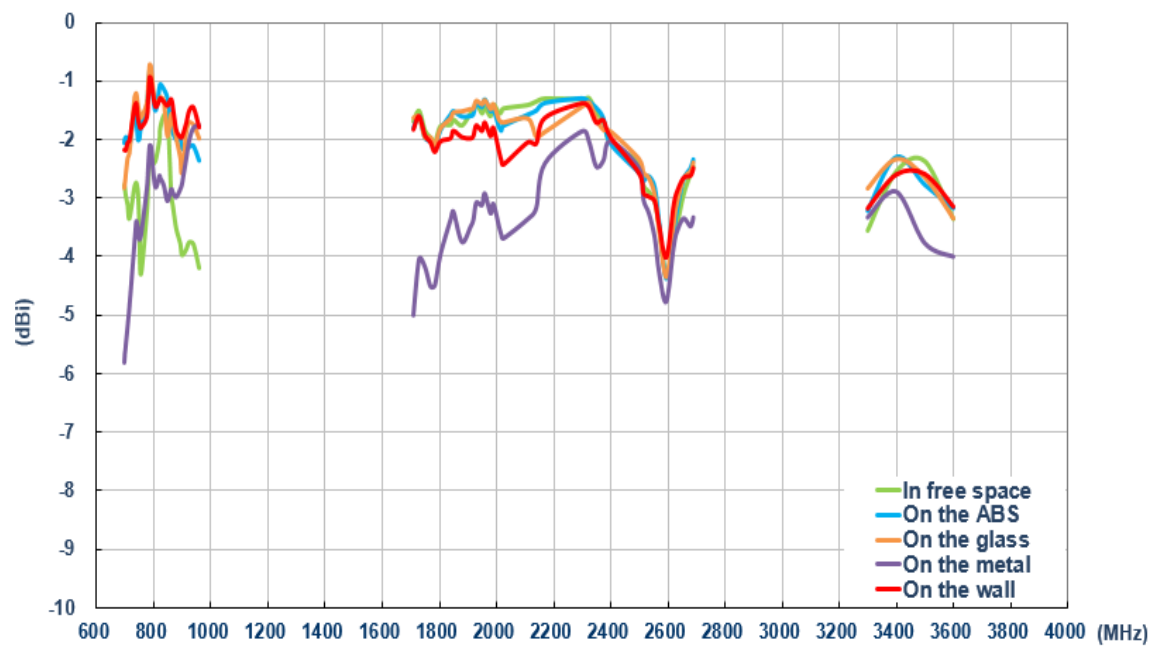




### 3.2.8 LTE\_2 Antenna Average Gain

Performance in different environments with 1 meter cable length

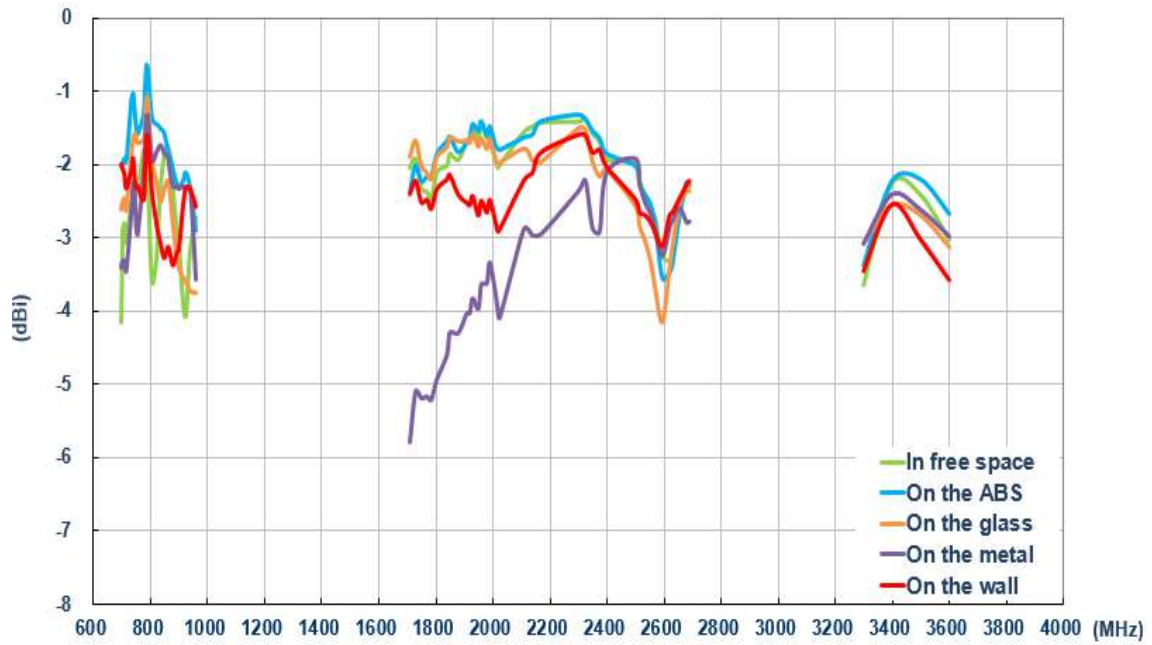


### 3.2.9 LTE\_1 Antenna Peak Gain

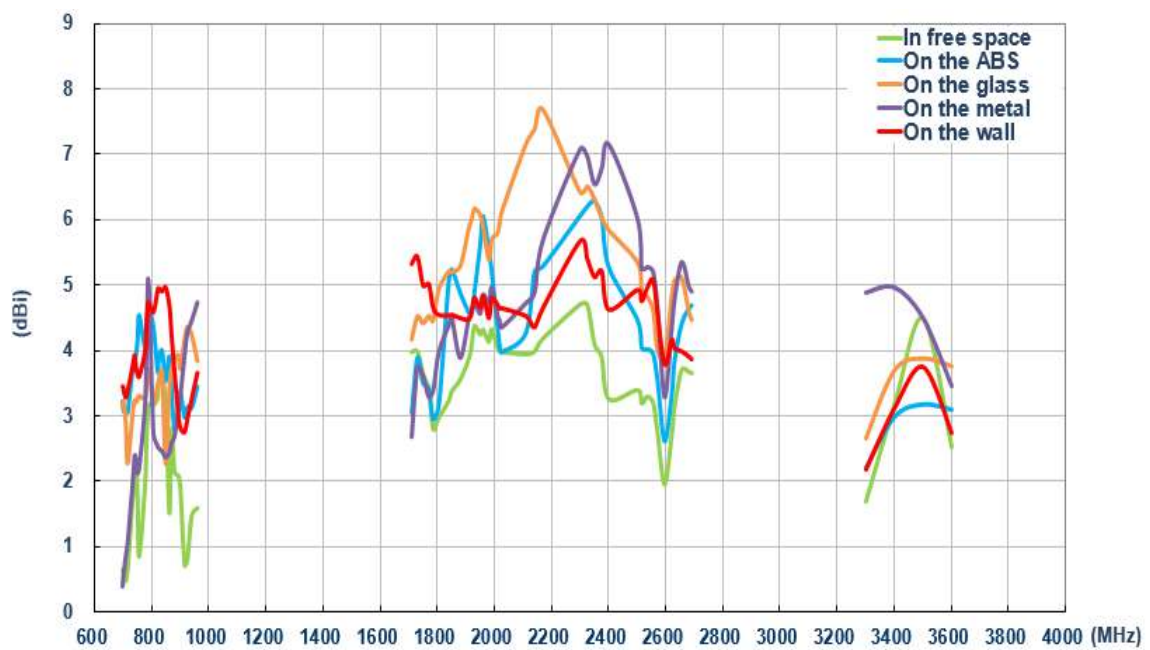


### 3.2.10 LTE\_2 Antenna Peak Gain

Performance in different environments with 1 meter cable length

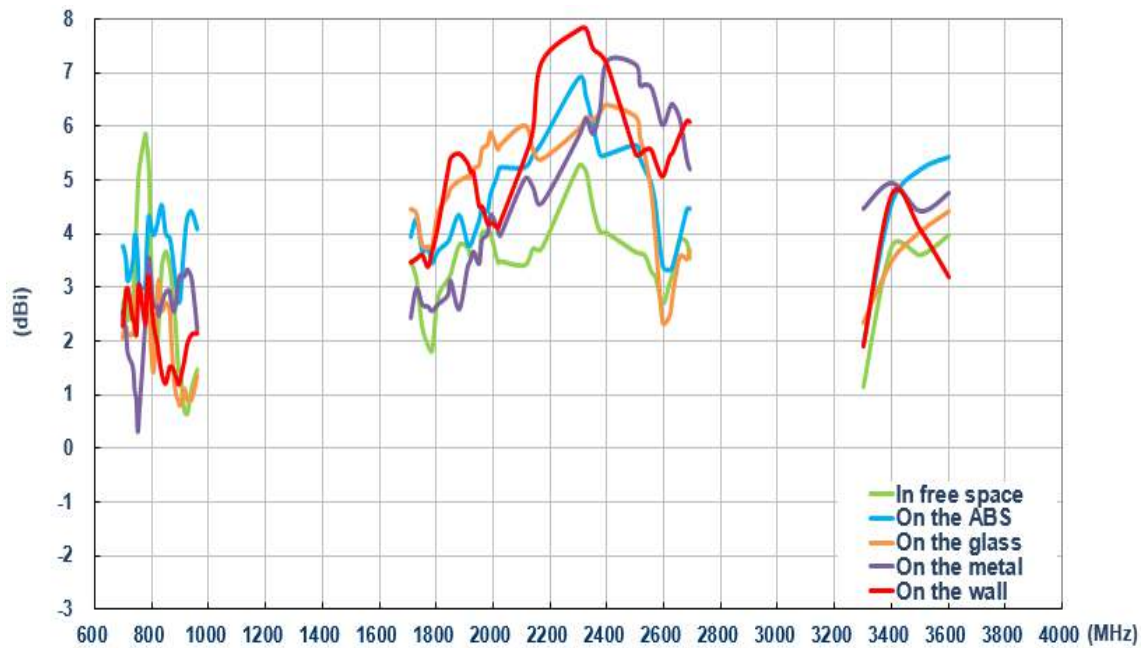


### 3.2.11 Wi-Fi\_1 Antenna Return Loss

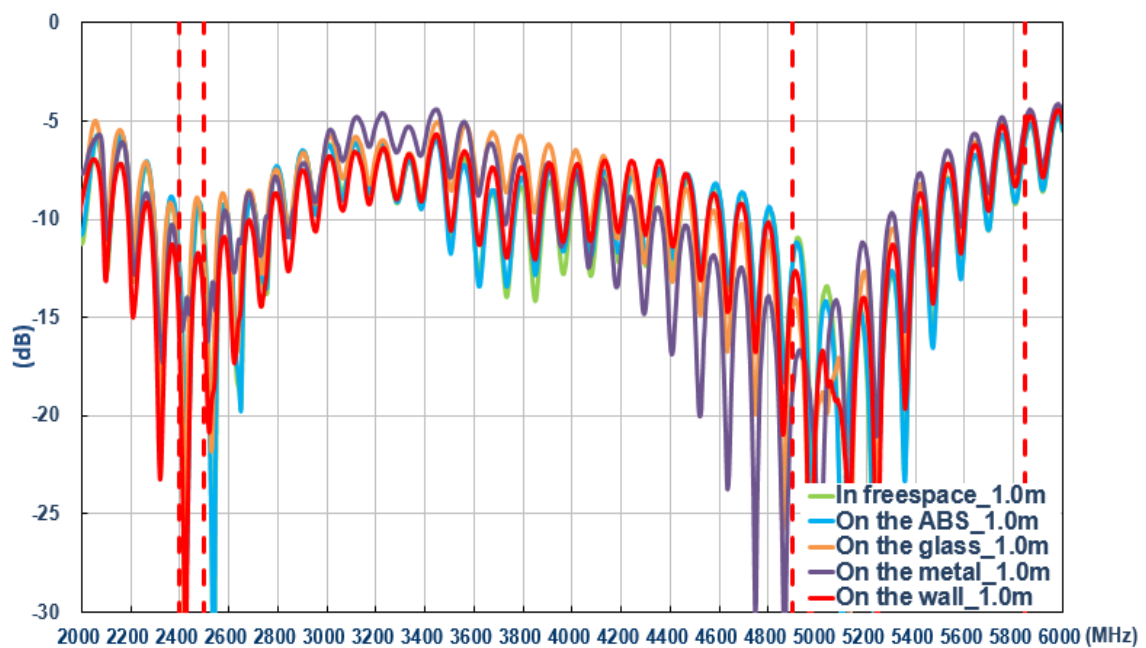


### 3.2.12 Wi-Fi\_2 Isolation

Performance in different environments with 1 meter cable length

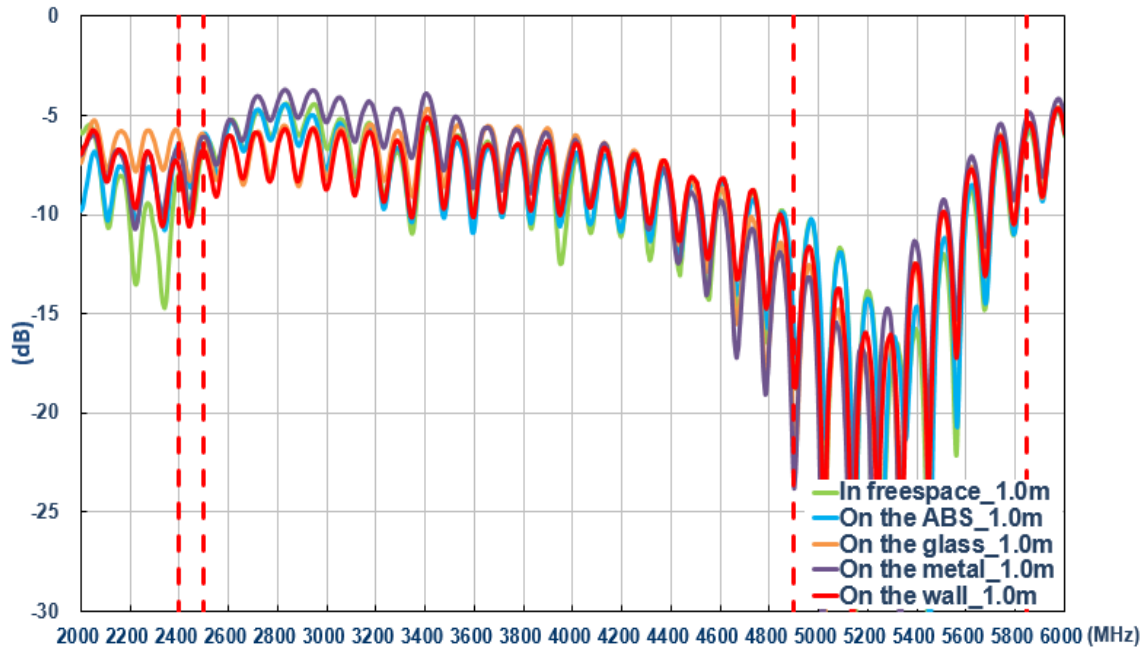


### 3.2.13 Wi-Fi Envelope Correlation Coefficient

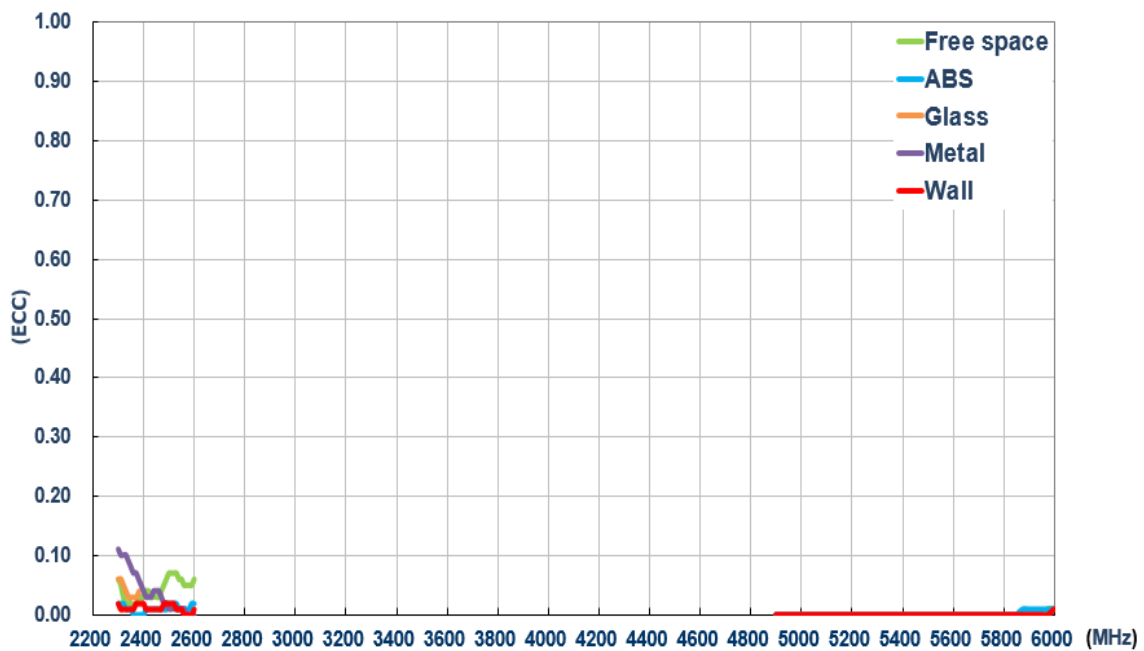




### 3.2.14 Wi-Fi\_1 Antenna Efficiency

Performance in different environments with 1 meter cable length

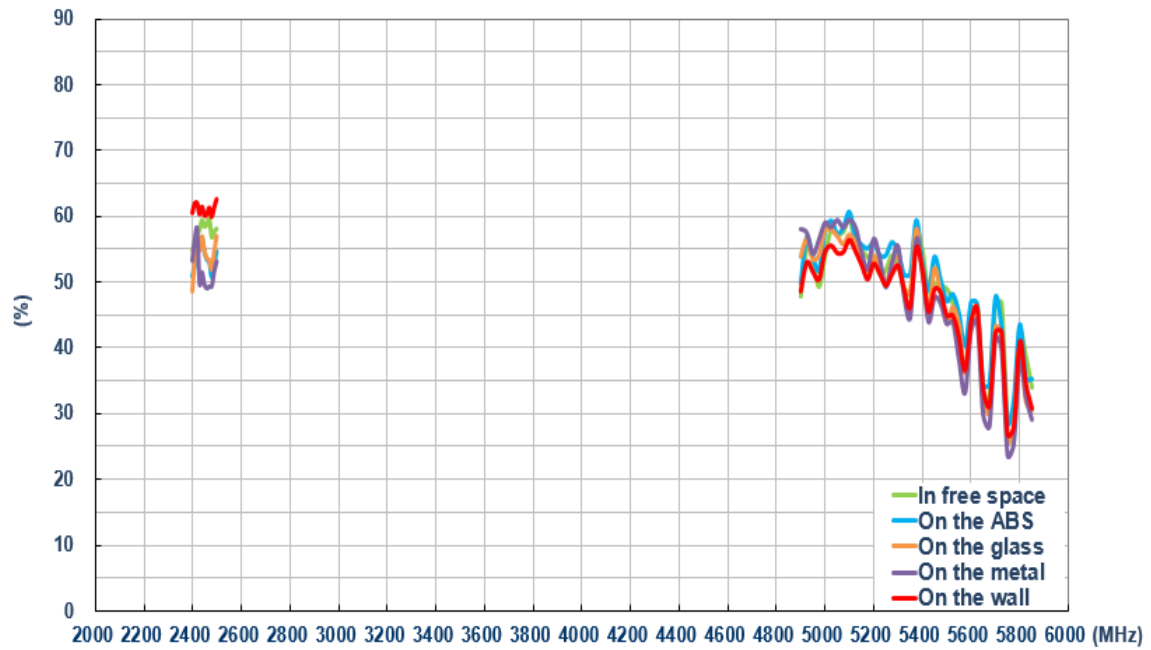


### 3.2.15 Wi-Fi\_2 Antenna Efficiency

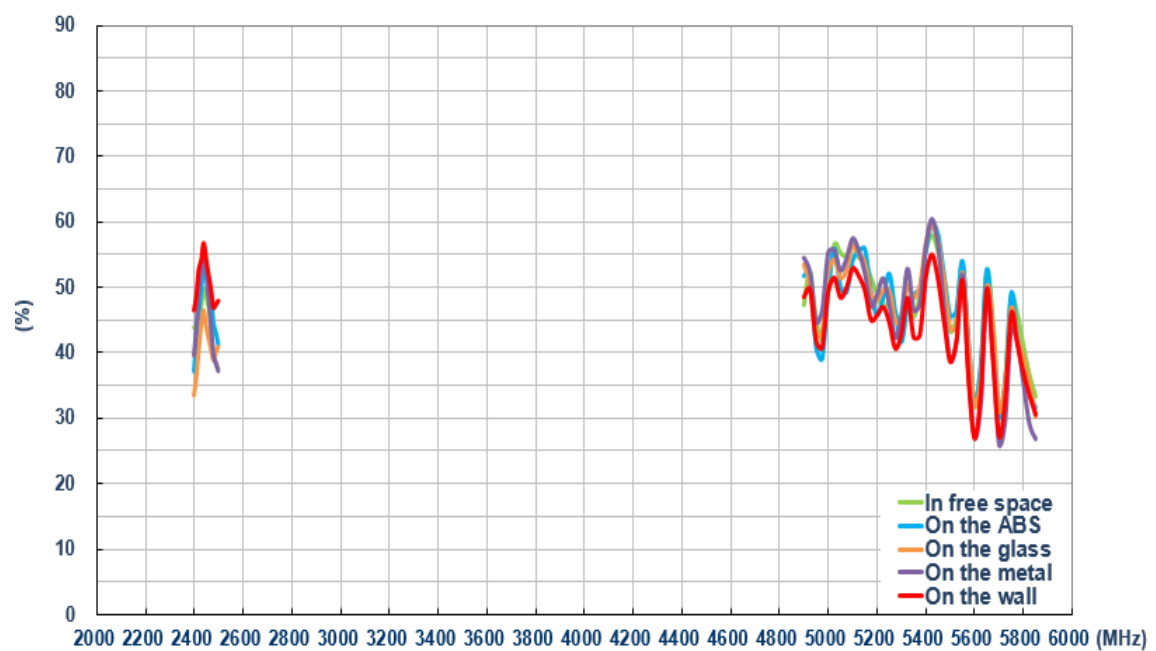


### 3.2.16 Wi-Fi\_1 Antenna Average Gain

Performance in different environments with 1 meter cable length

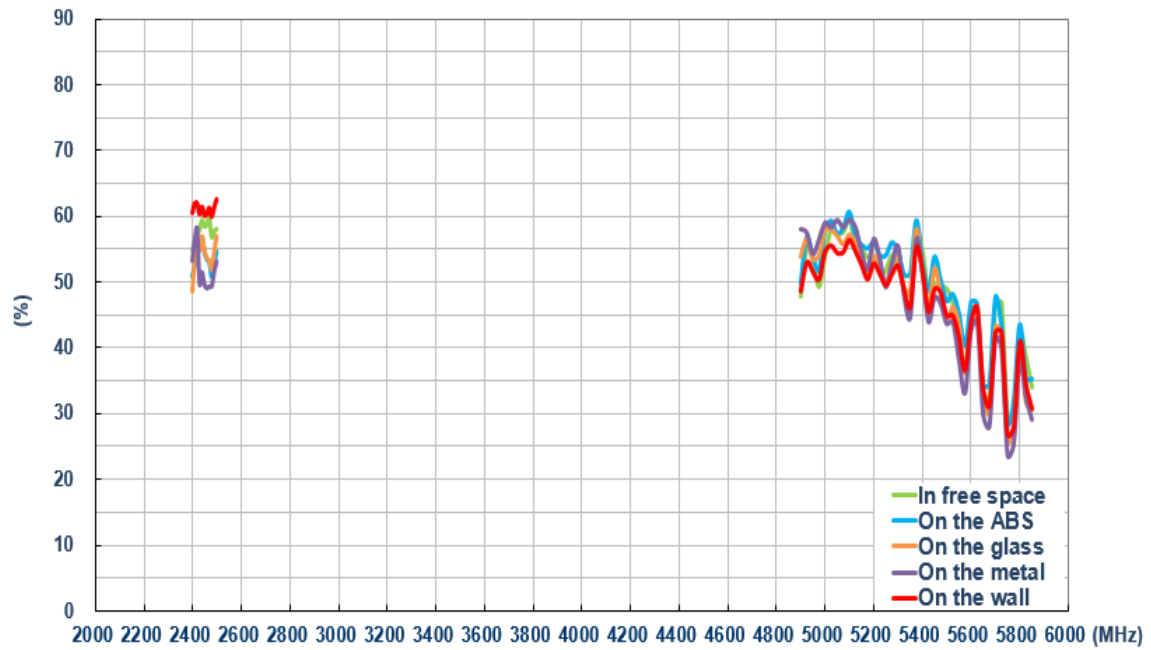


### 3.2.17 Wi-Fi\_2 Antenna Average Gain

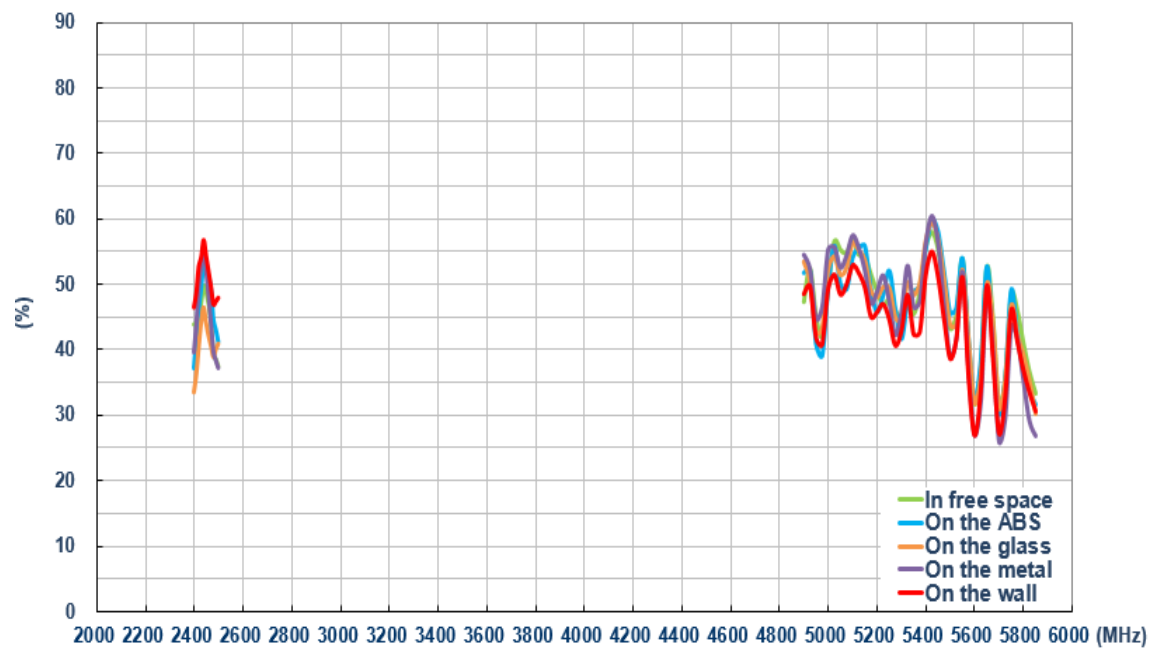


### 3.2.18 Wi-Fi\_1 Antenna Peak Gain


Performance in different environments with 1 meter cable length

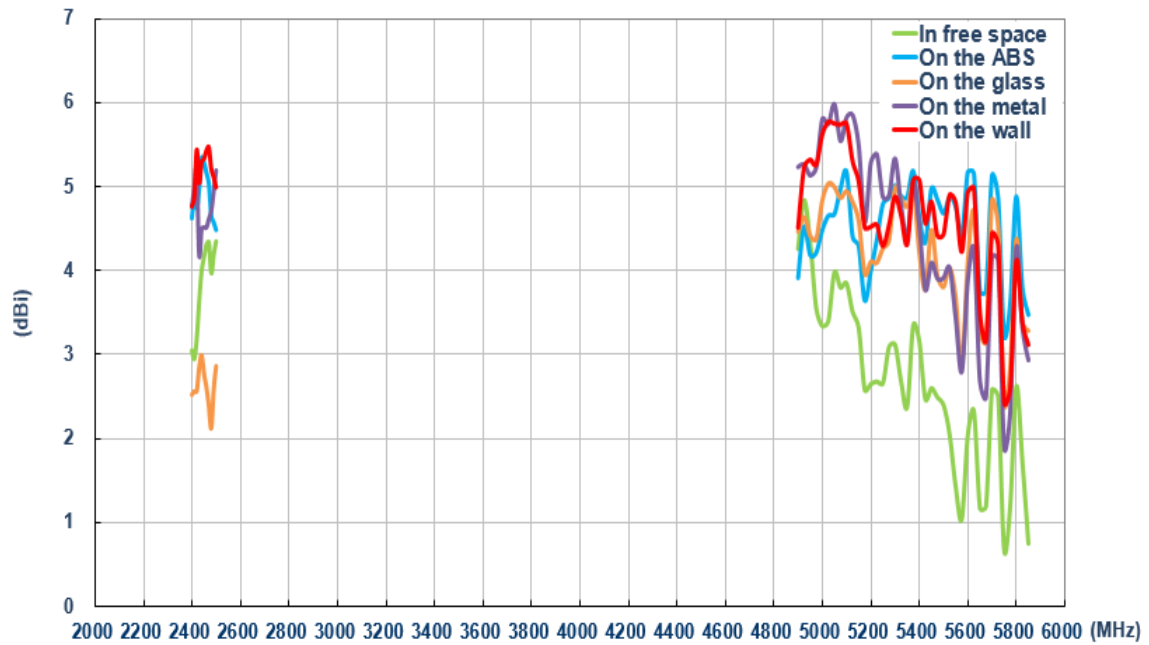

### 3.2.19 Wi-Fi\_2 Antenna Peak Gain

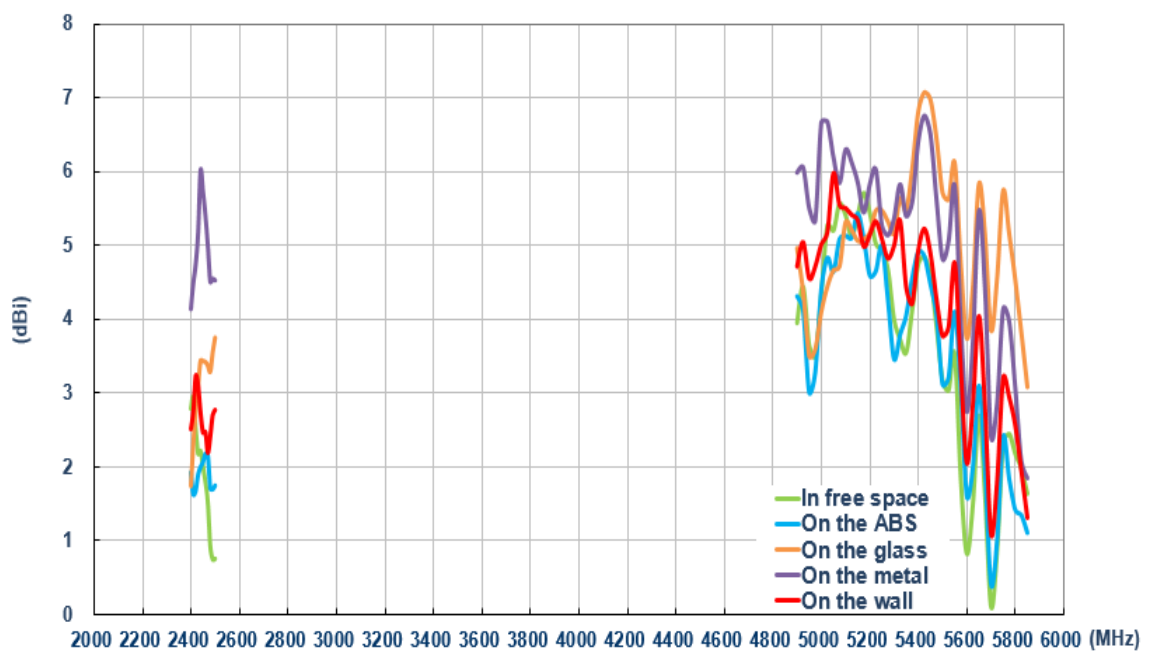





3.2.20 Test Setup for Antenna Radiation Pattern

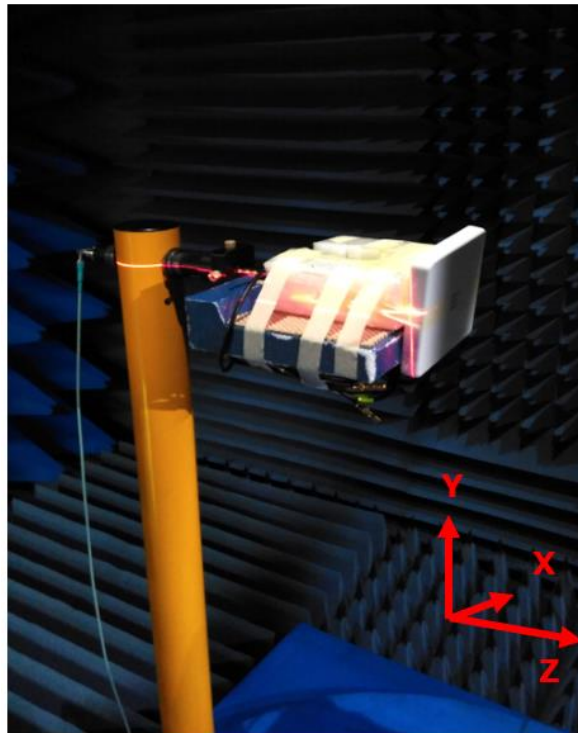





In free space

3.2.21 2D Radiation Patterns (LTE\_MIMO1 with 1M cable length in free space)

XY Plane

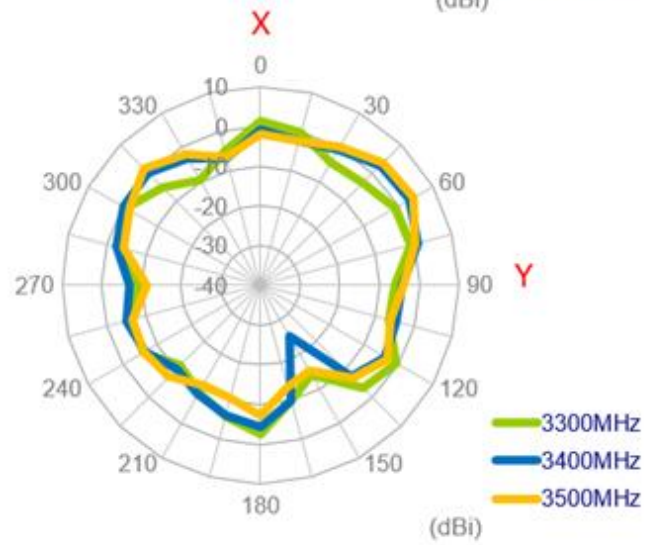
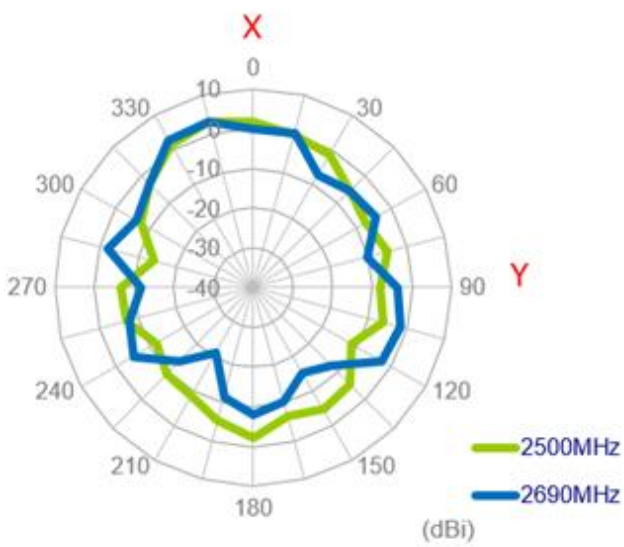
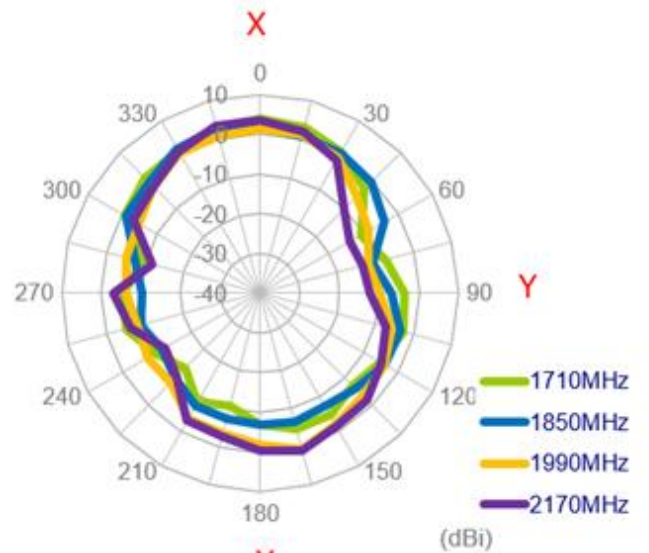
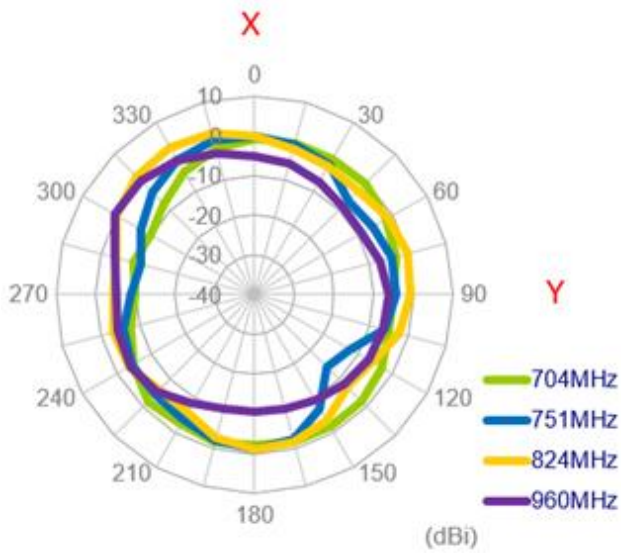


XZ Plane

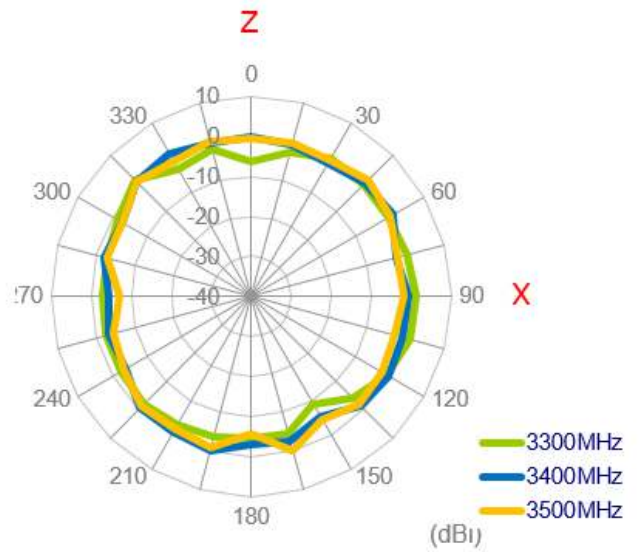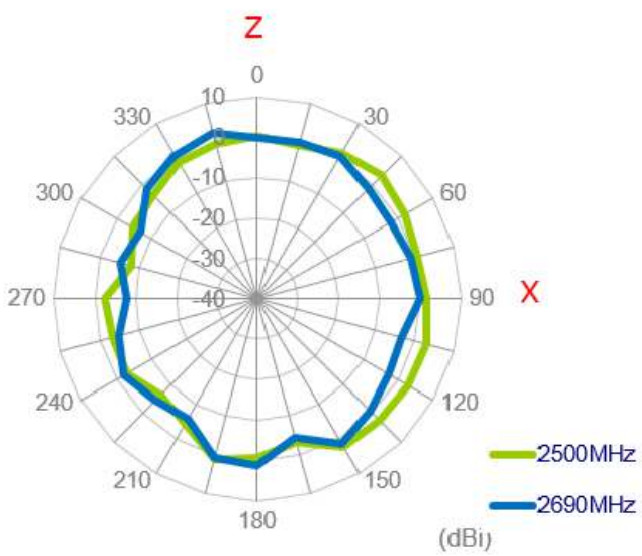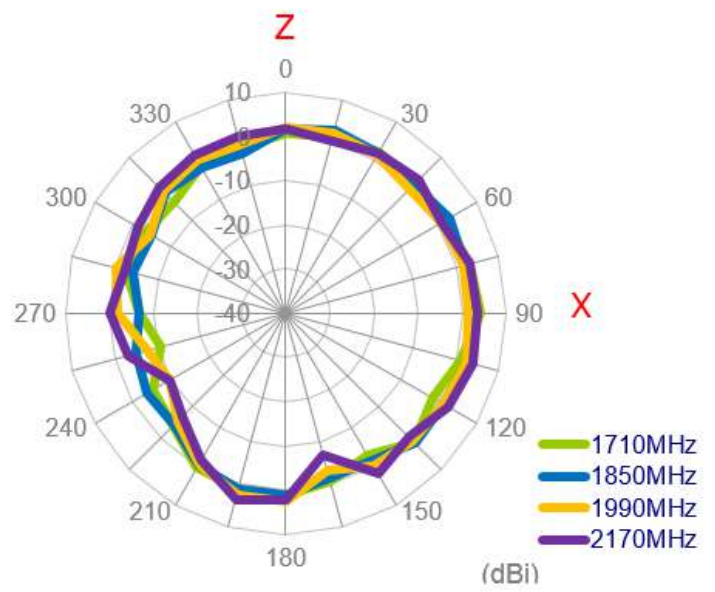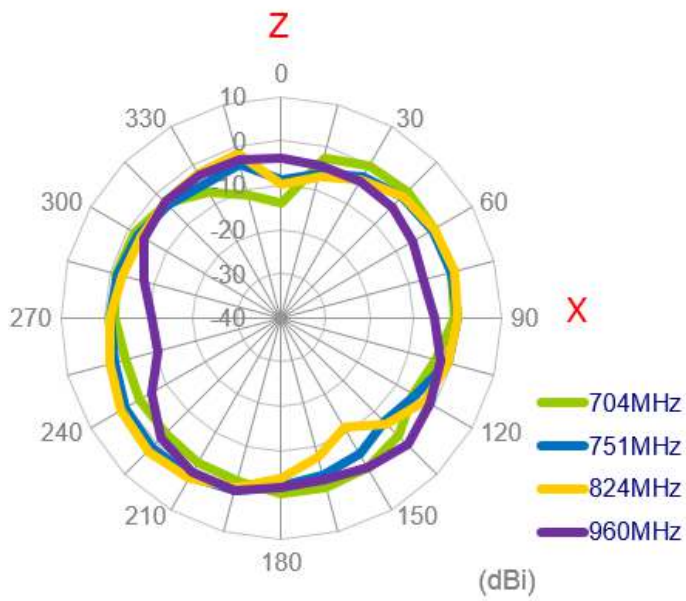





YZ Plane

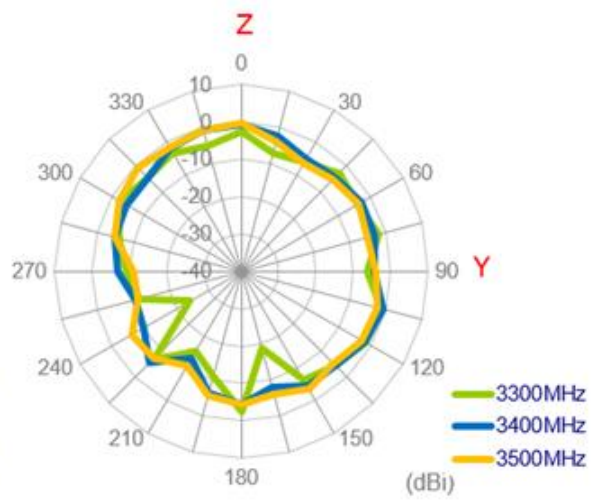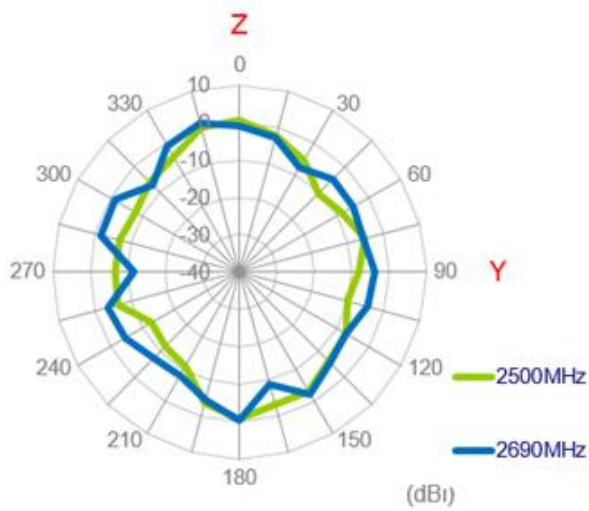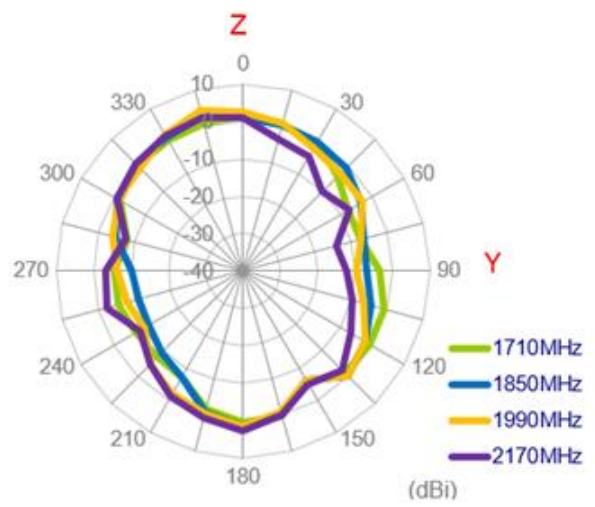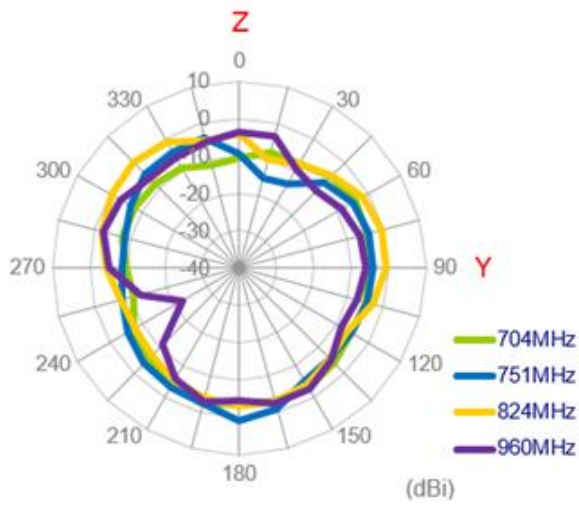


### 3.2.22 3D Radiation Patterns (LTE\_MIMO1 with 1M cable length in free space)

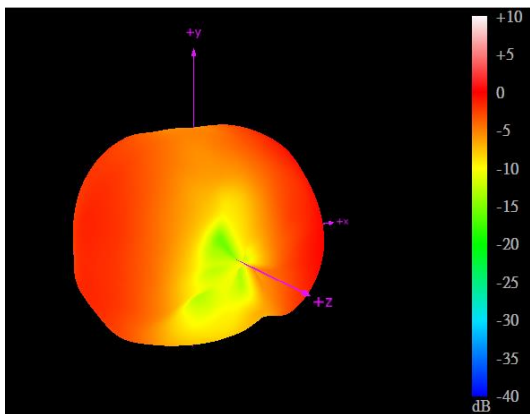


704MHz

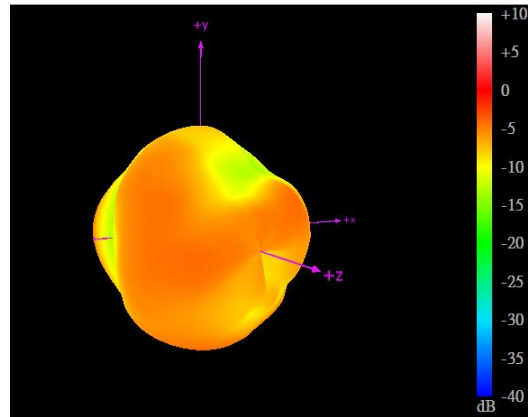


960MHz

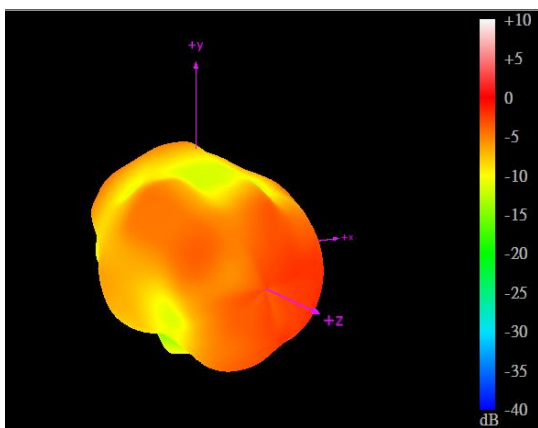


1710MHz

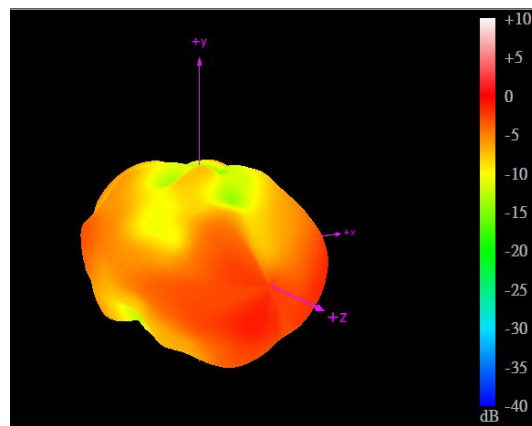

2170MHz

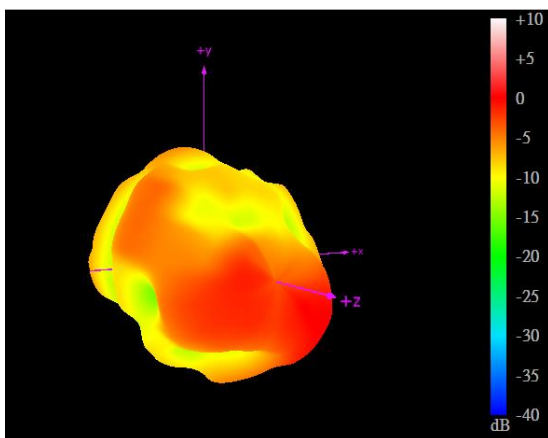

2690MHz




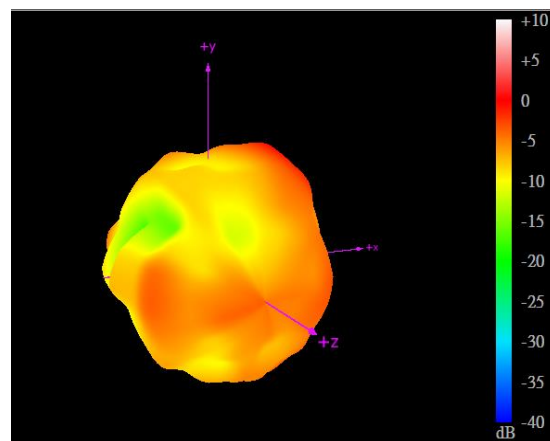


3500MHz







### 3.2.23 2D Radiation Patterns (LTE\_MIMO2 with 1M cable length in free space)





## XY Plane

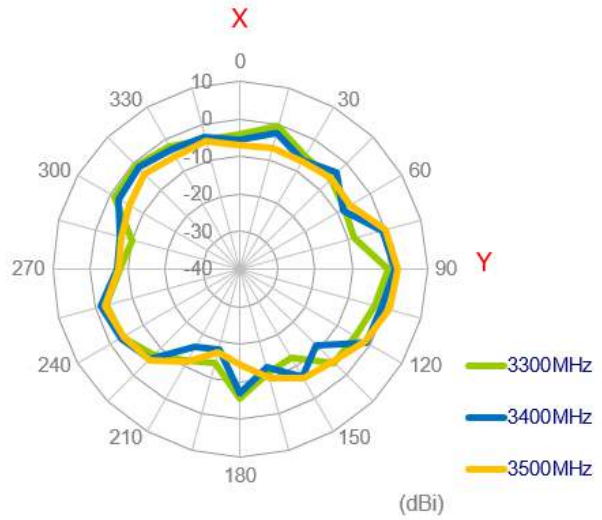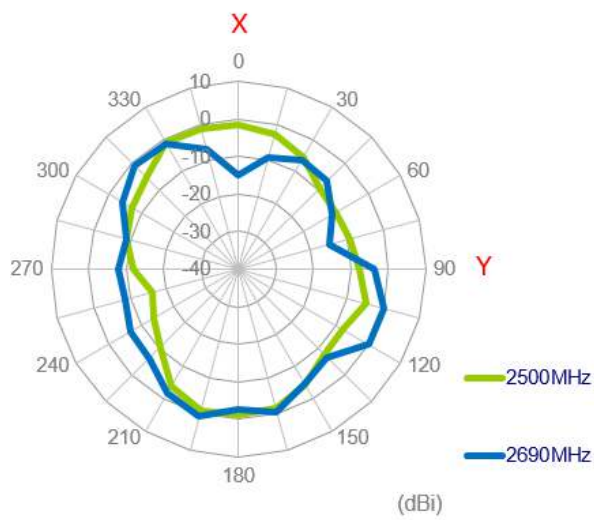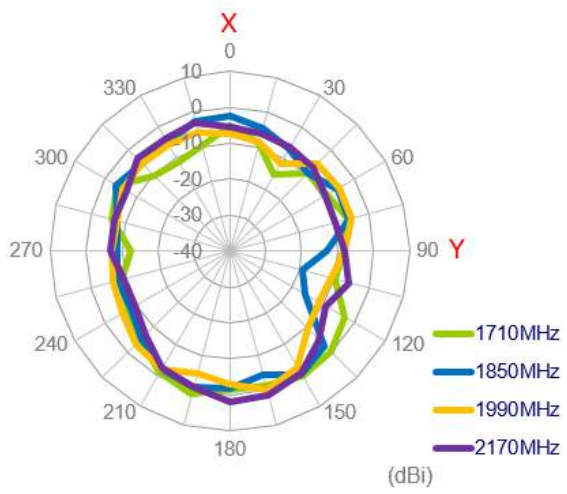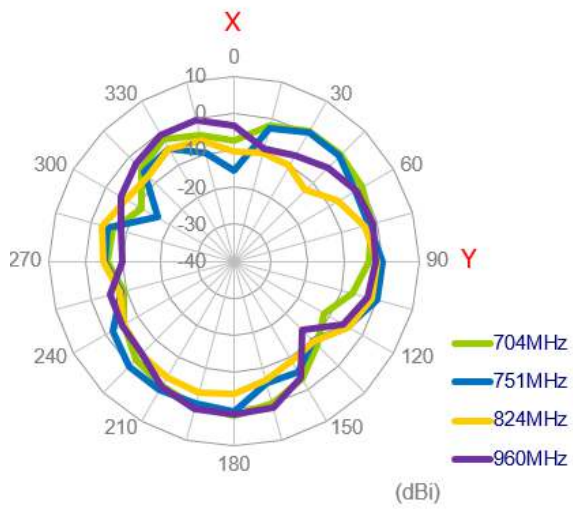


# XZ Plane

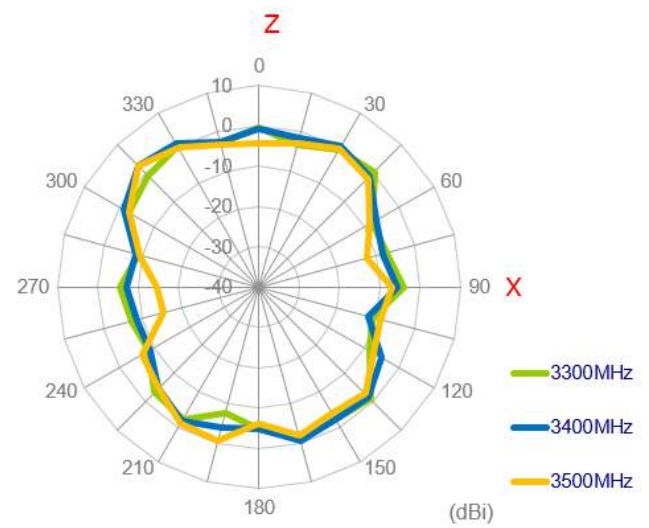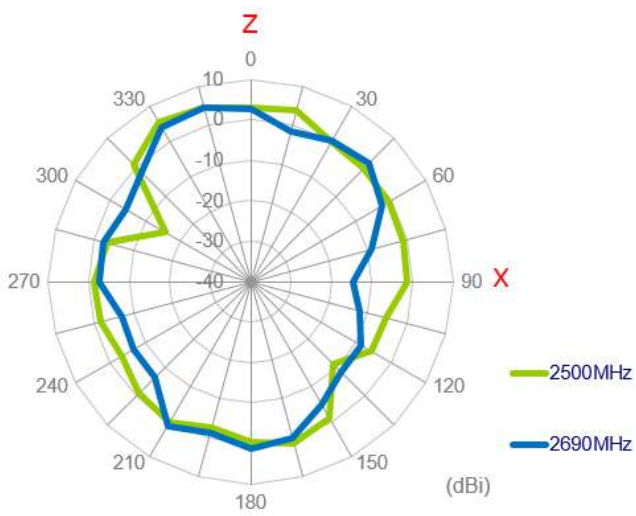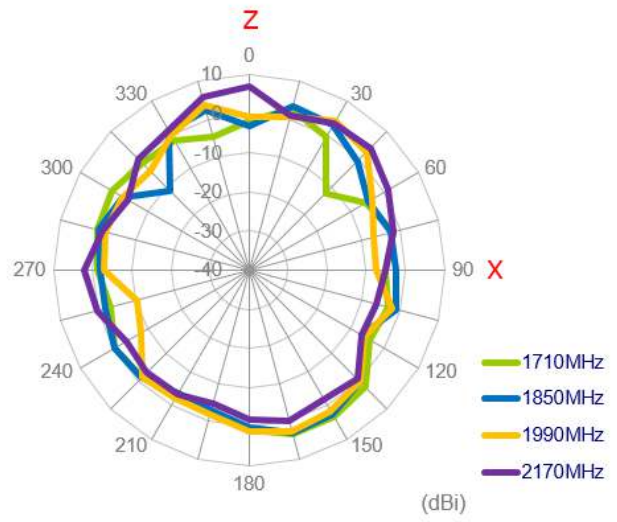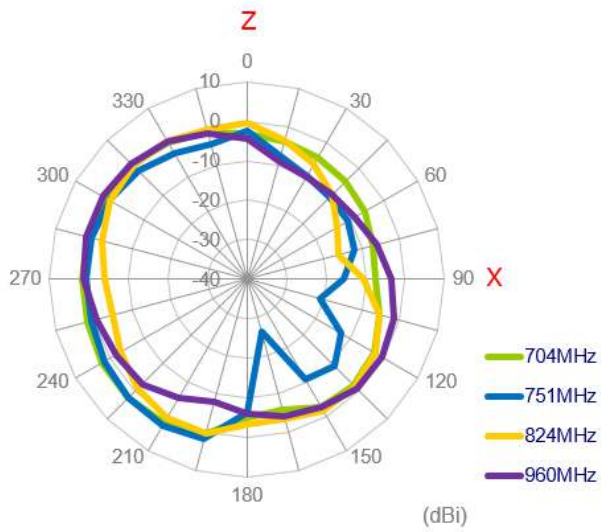


# YZ Plane

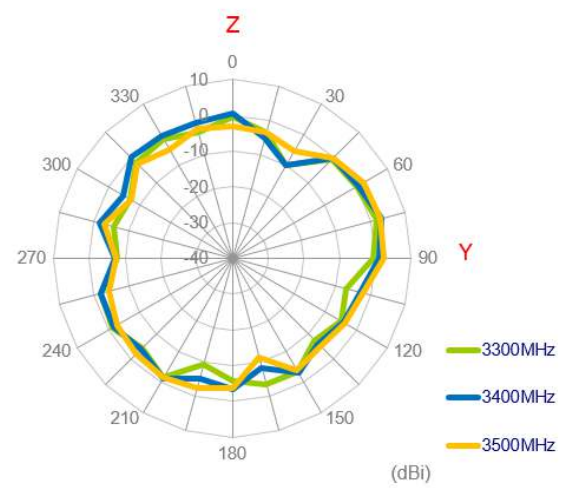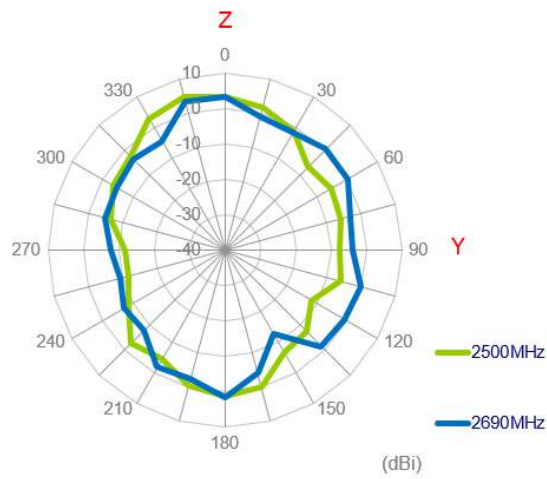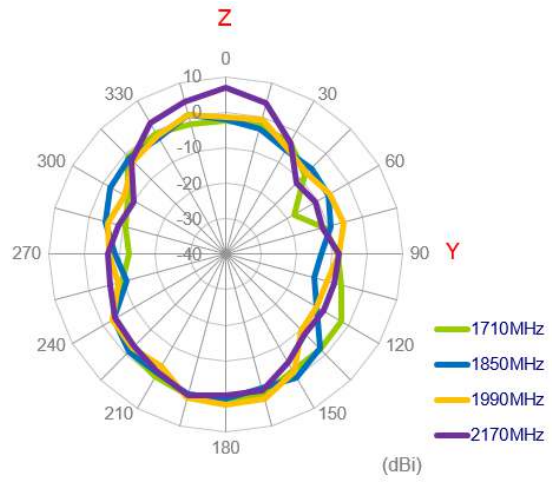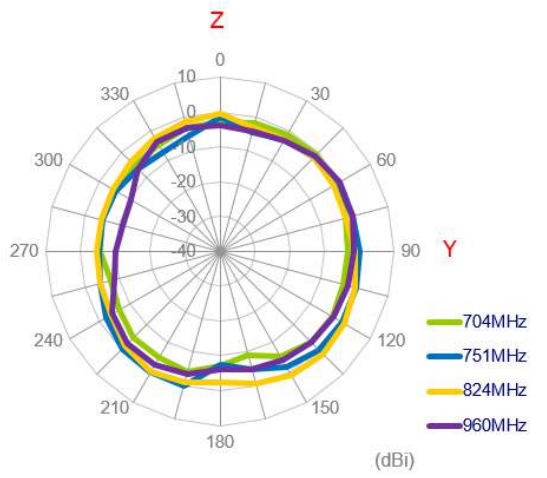


### 3.2.24 3D Radiation Patterns (LTE\_MIMO2 with 1M cable length in free space)

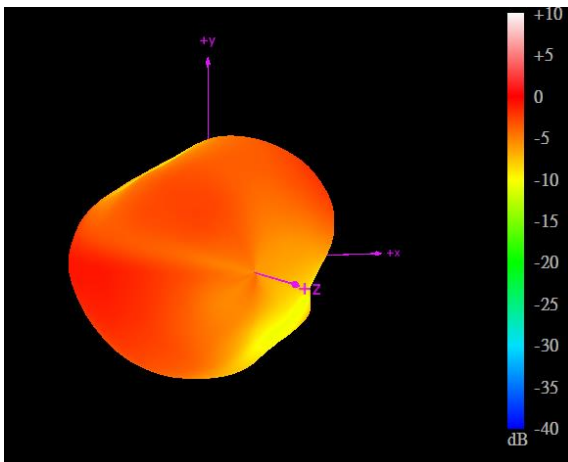


704MHz

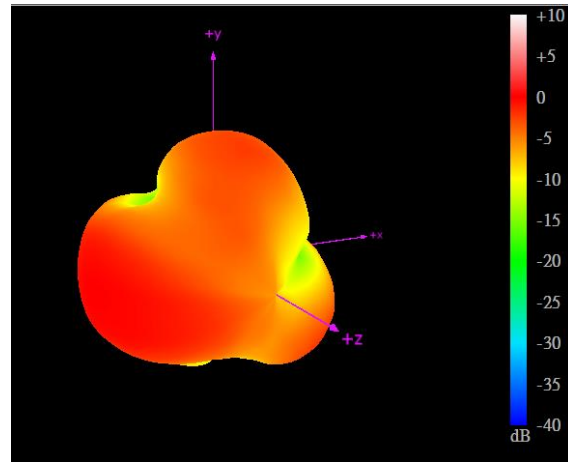


960MHz

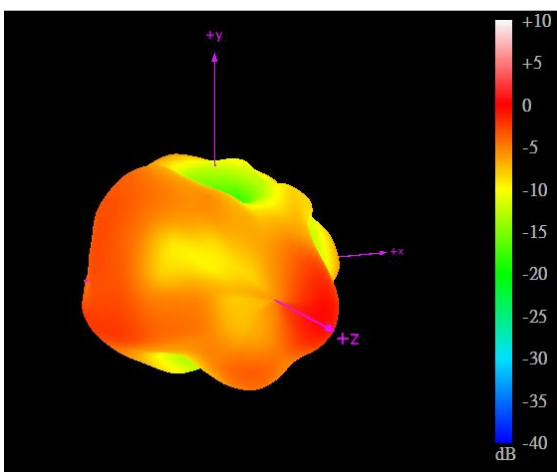


1710MHz

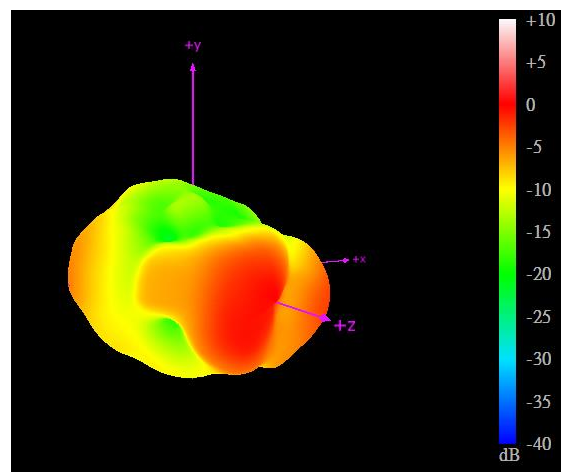

2170MHz

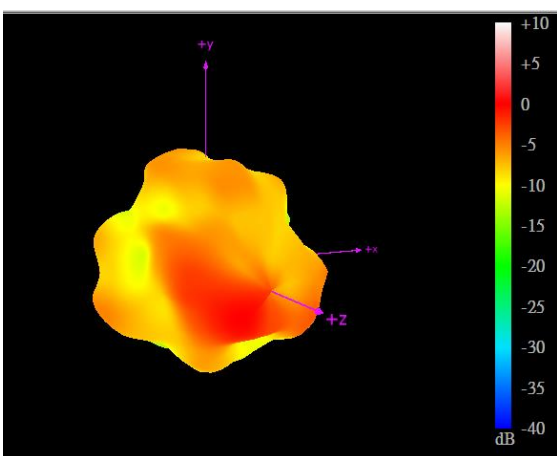

2690MHz

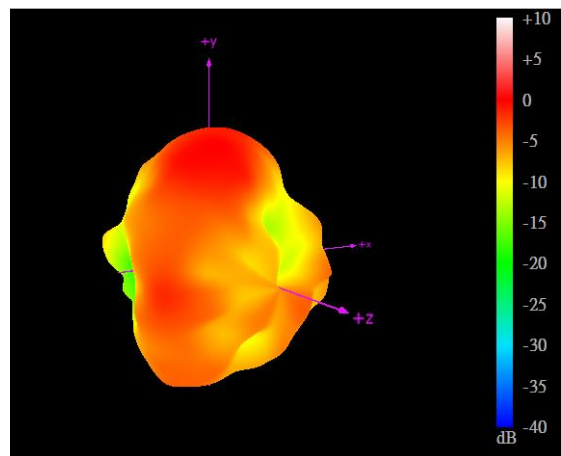



3500MHz





### 3.2.25 2D Radiation Patterns (LTE\_MIMO1 with 1M cable length in free space)

## XY Plane

XY Plane

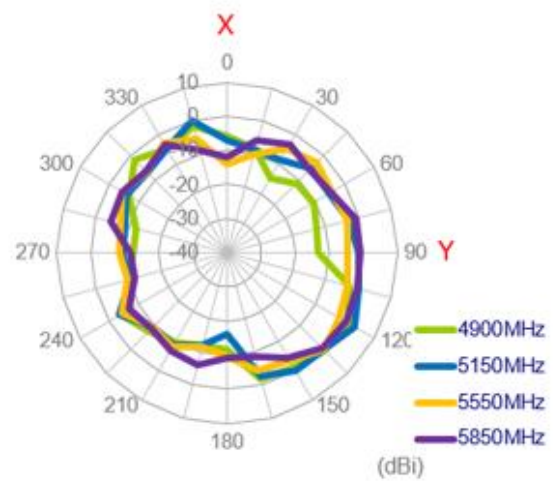
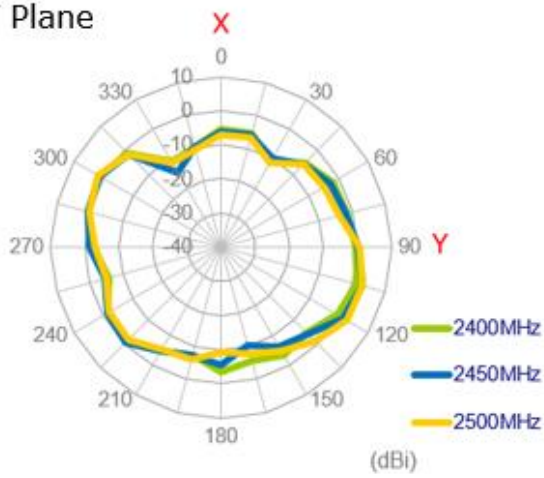


## XZ Plane

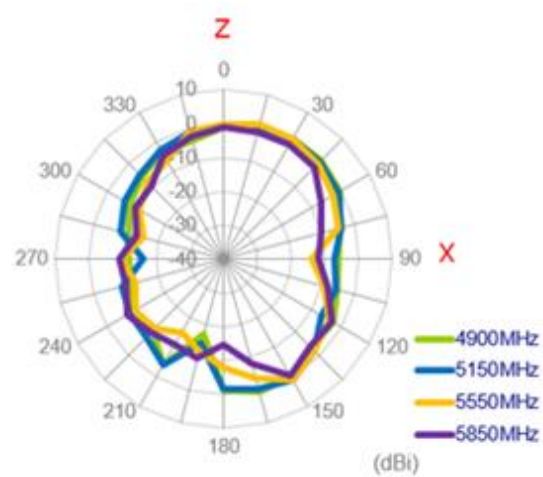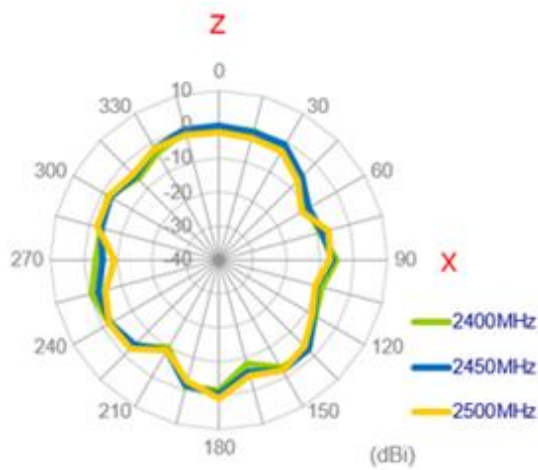


## YZ Plane


YZ Plane

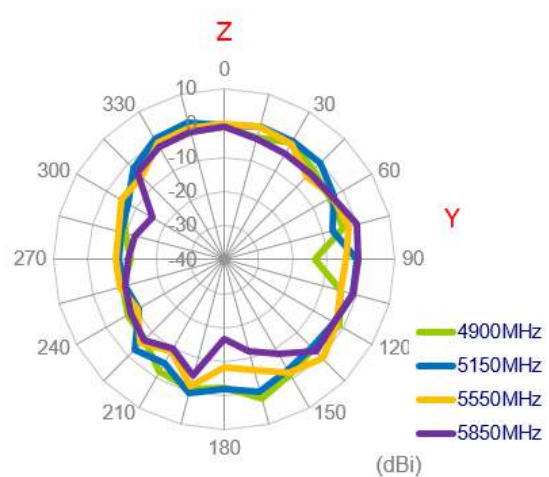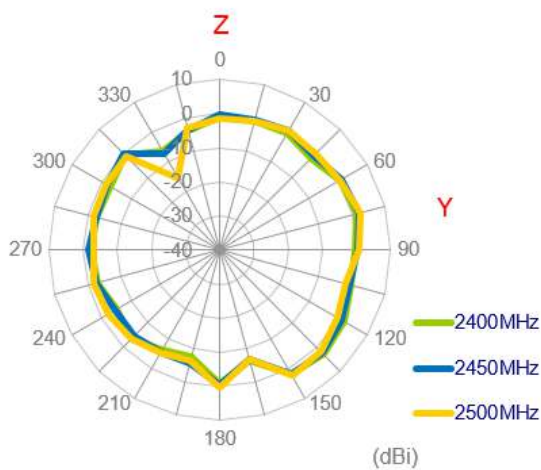

3.2.26 3D Radiation Patterns Pattern (Wi-Fi\_MIMO1 with 1M cable length in free space)

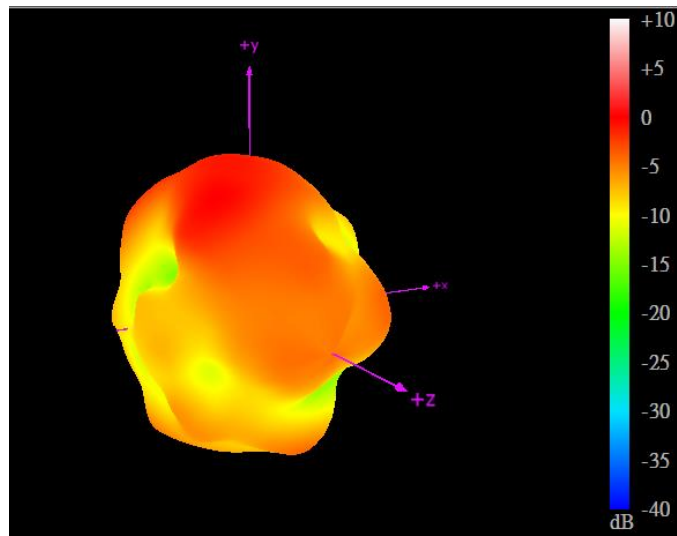

2450MHz

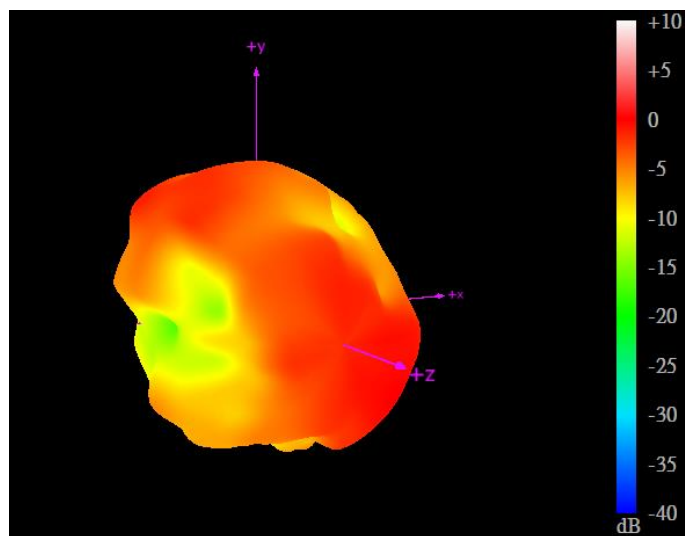


5550MHz

### 3.2.27 2D Radiation Patterns (Wi-Fi\_MIMO2 with 3M cable length in free space)


## XY Plane

XY Plane

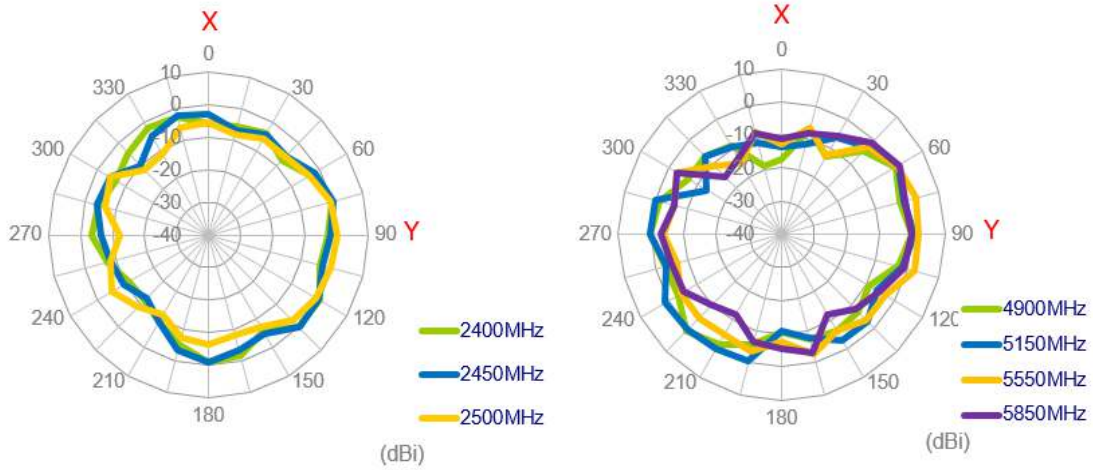


## XZ Plane

XZ Plane

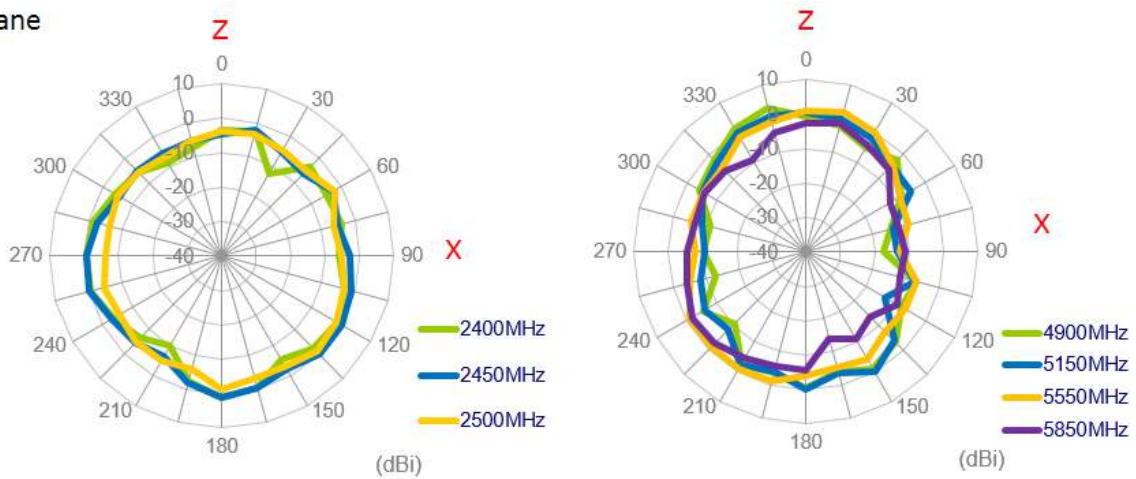


## YZ Plane


YZ Plane

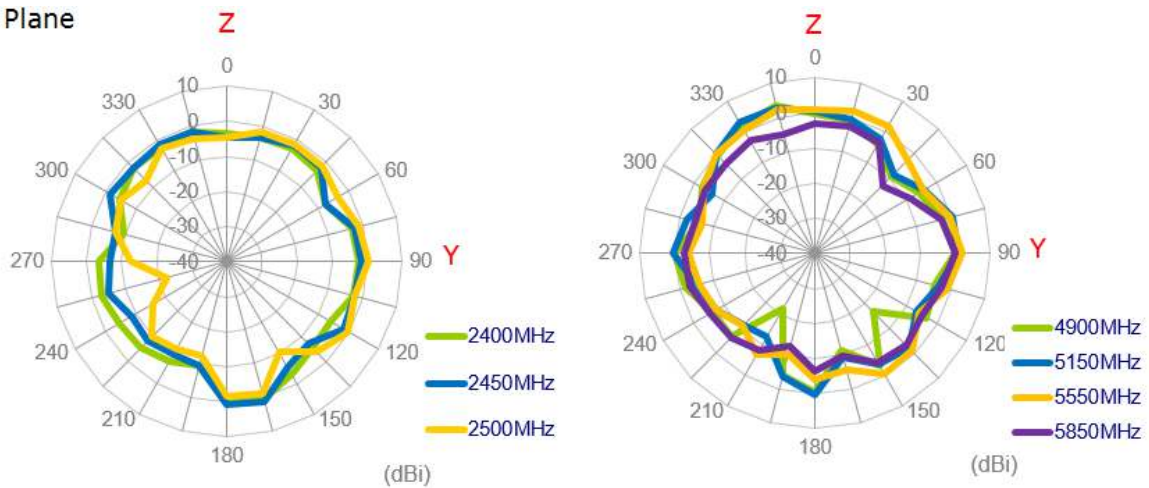

3.2.28 3D Radiation Patterns Pattern (Wi-Fi\_MIMO2 with 1M cable length in free space)

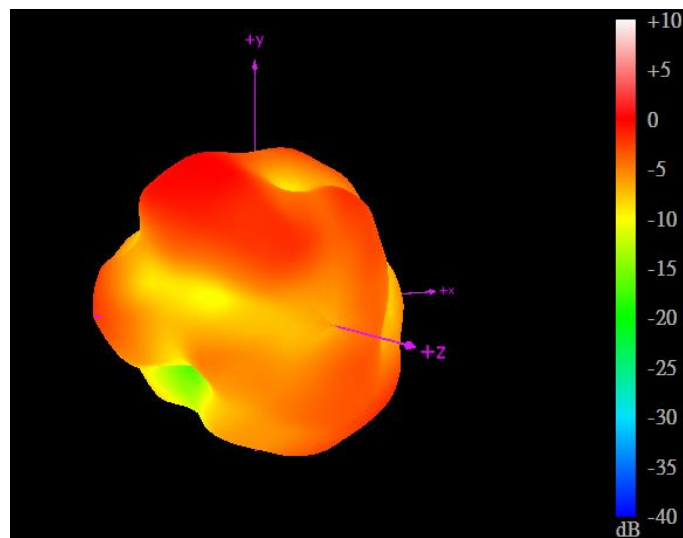

2450MHz

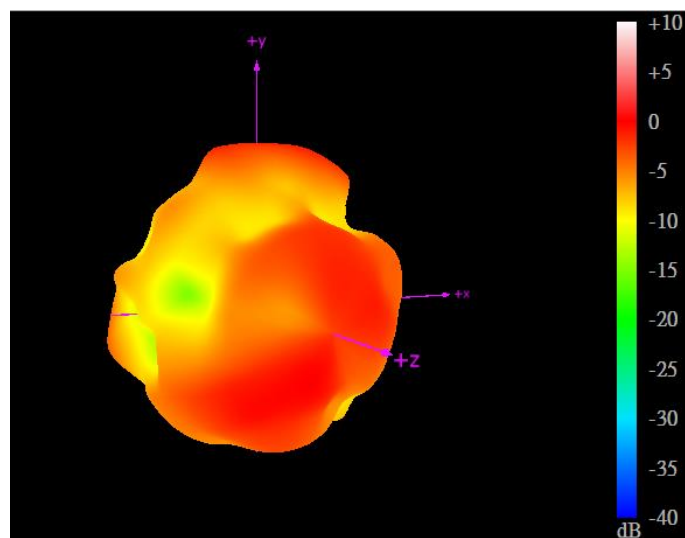

5550MHz







3.2.29 Test Setaup for Antenna Radiation Pattern







On the ABS

3.2.30 2D Radiation Patterns (LTE\_MIMO1 with 1M cable length on ABS)





XY Plane

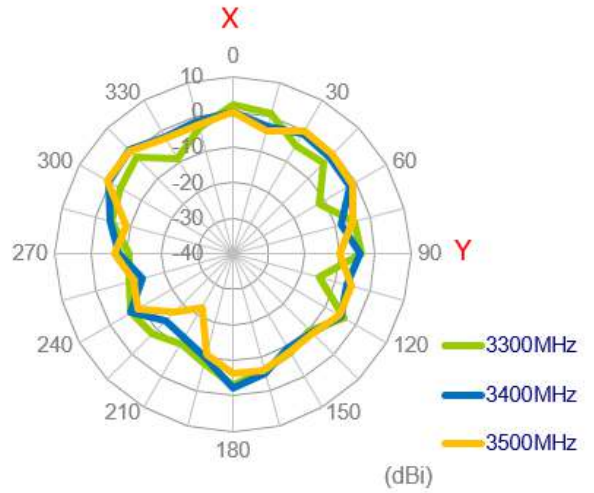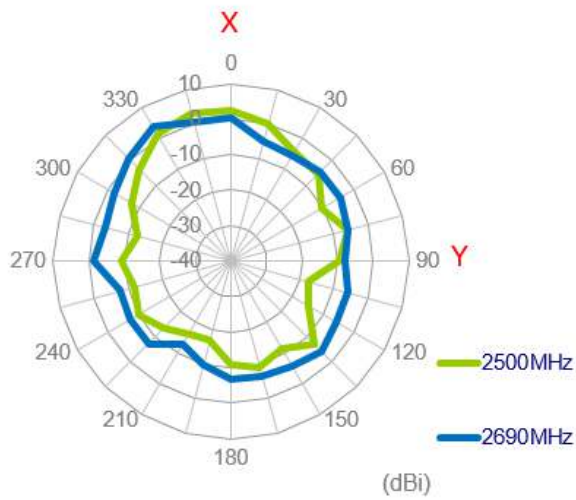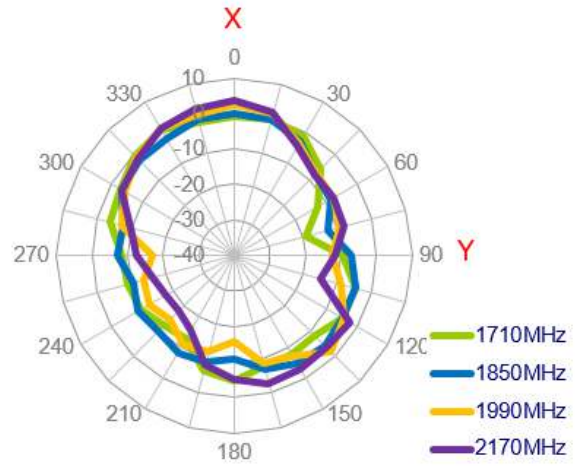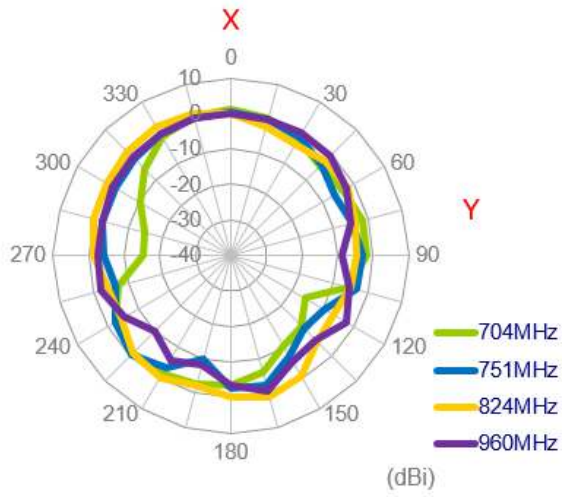


XZ Plane

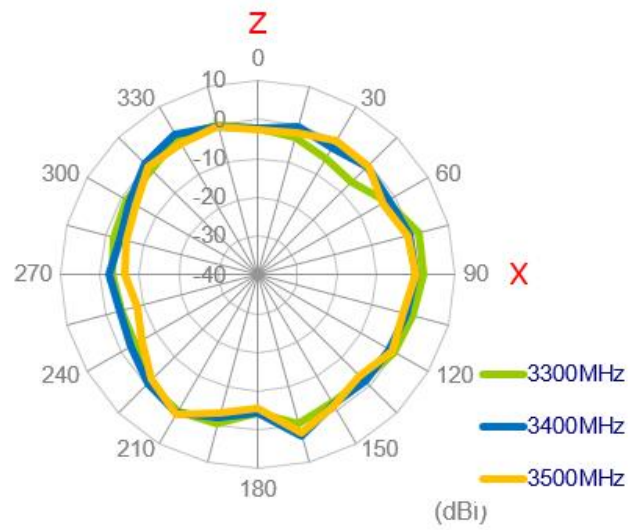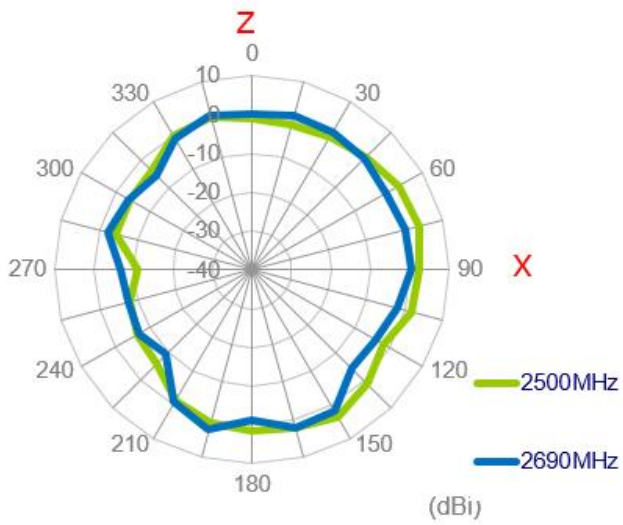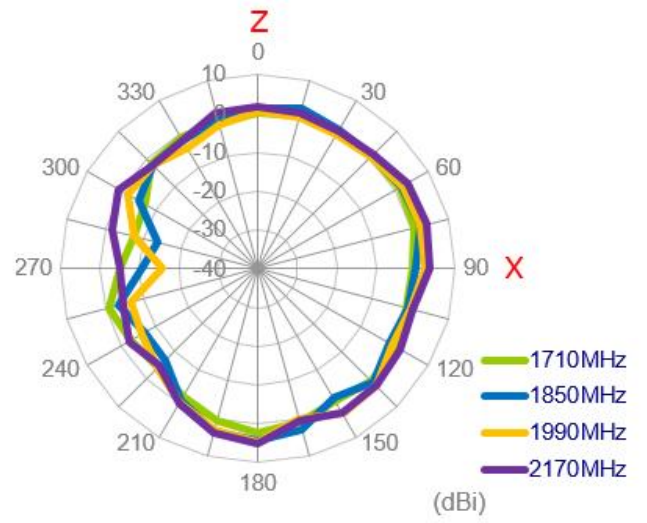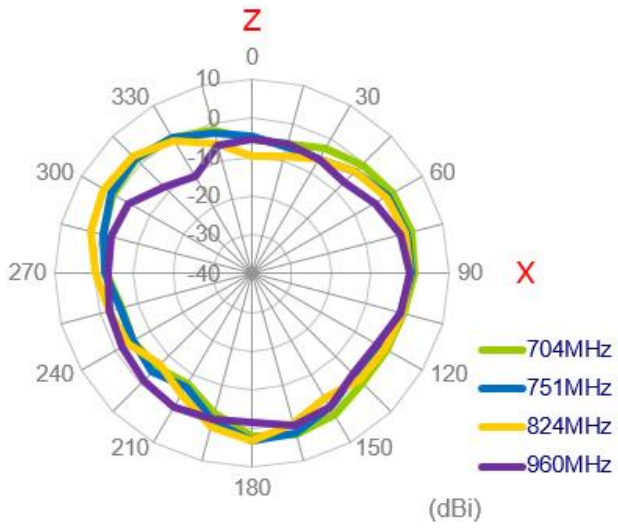


YZ Plane

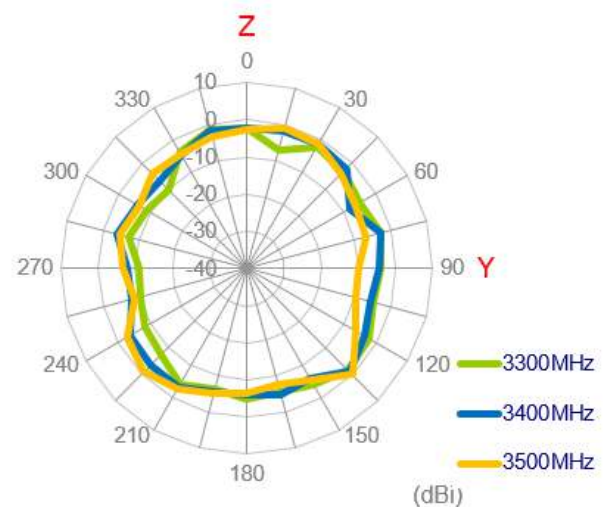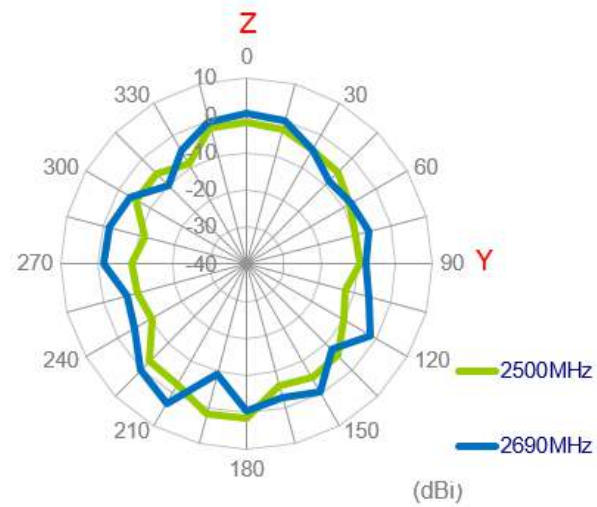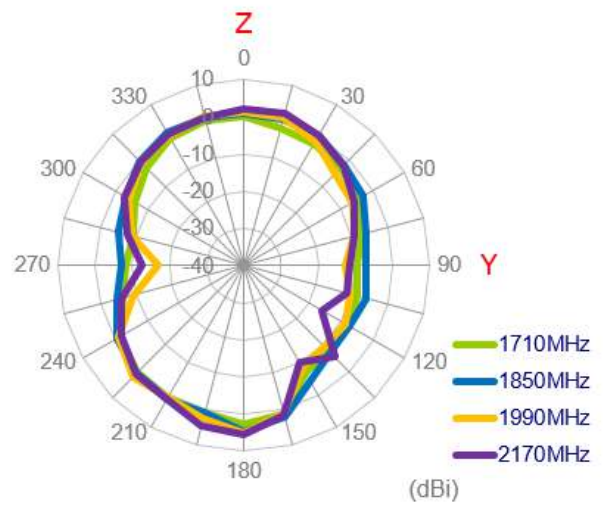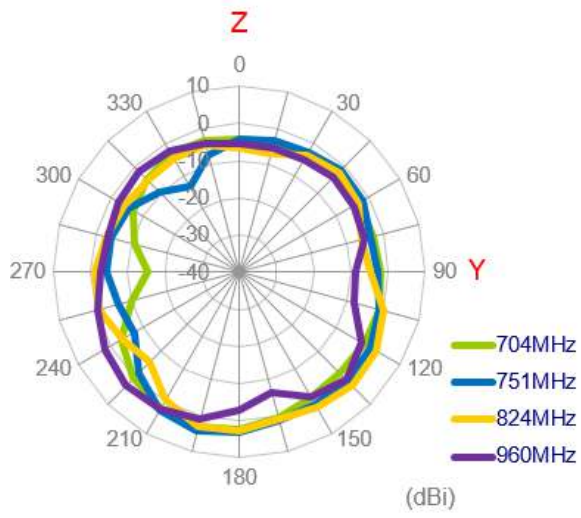


### 3.2.31 3D Radiation Patterns (LTE\_MIMO1 with 1M cable length on ABS)

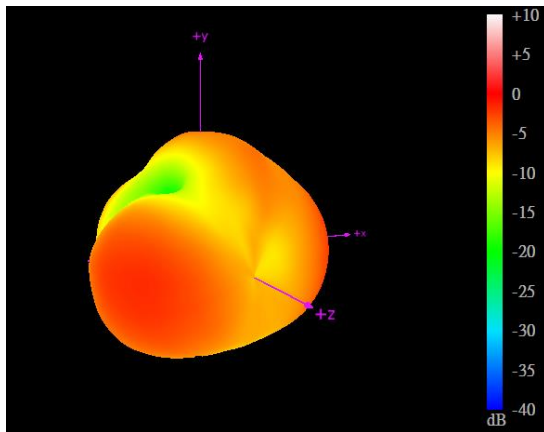


704MHz

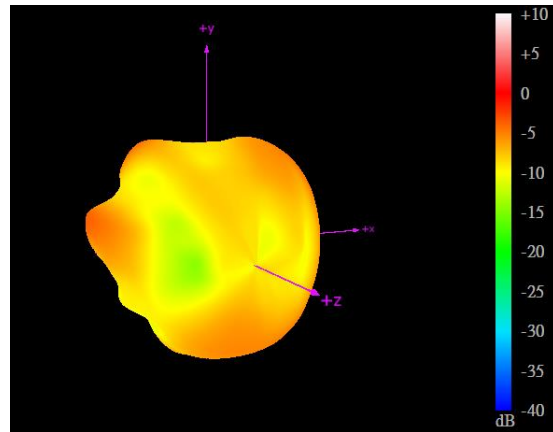


960MHz

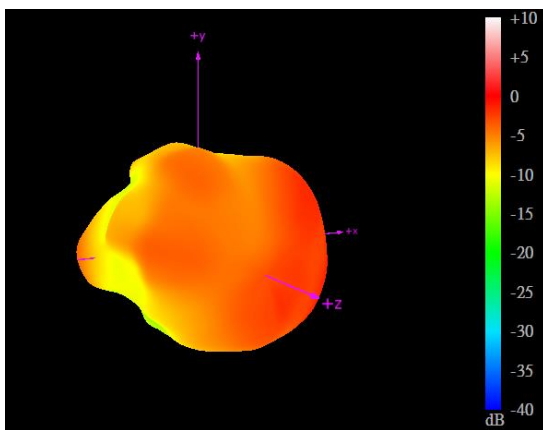


1710MHz

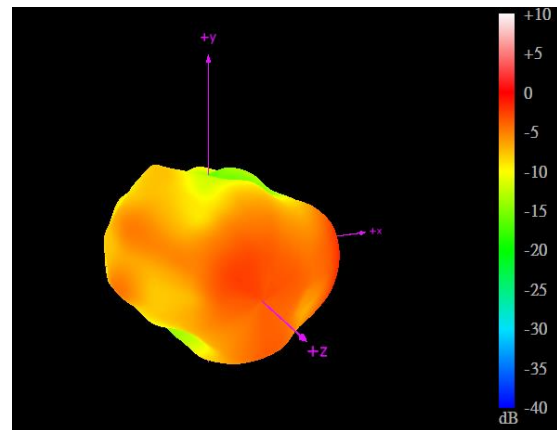

2170MHz

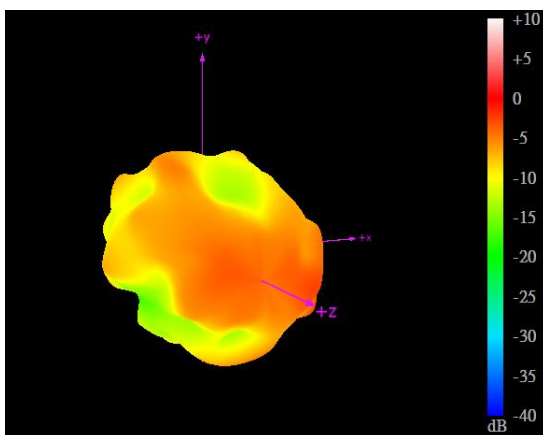

2690MHz




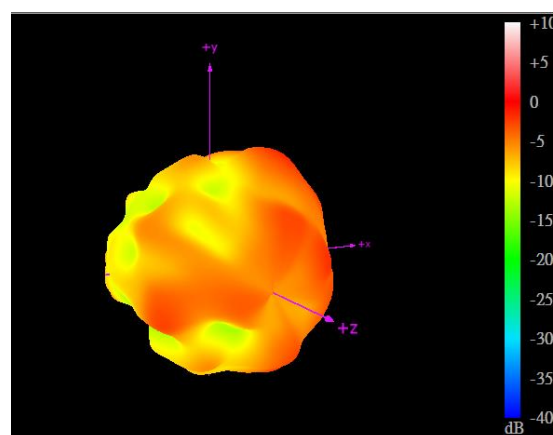


3500MHz







### 3.2.32 2D Radiation Patterns (LTE\_MIMO2 with 1M cable length on ABS)

## XY Plane

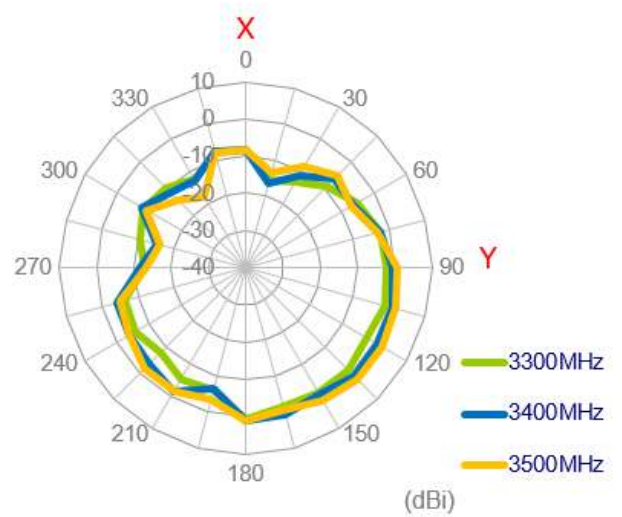
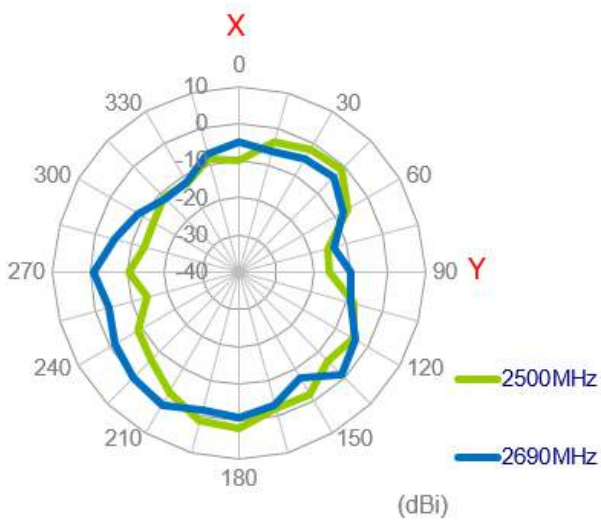
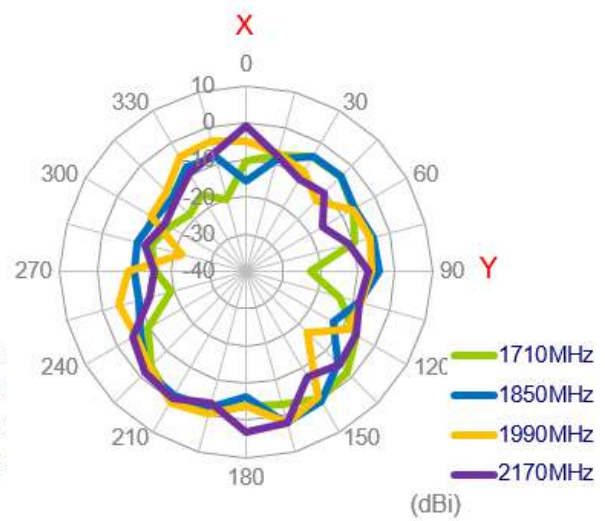
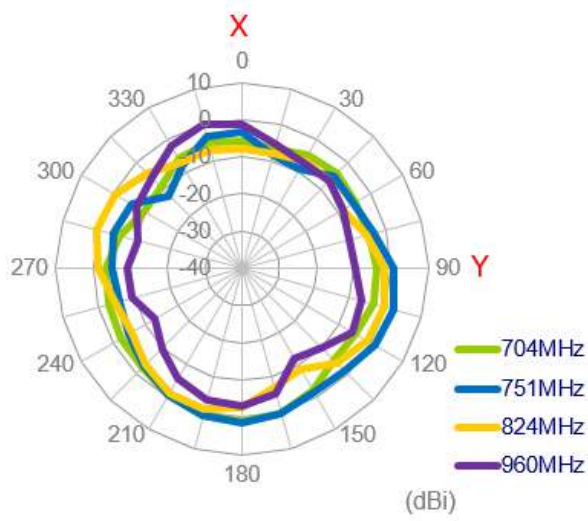


XZ Plane

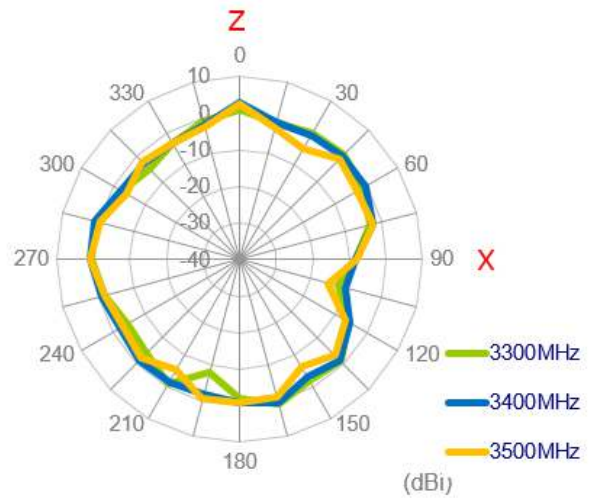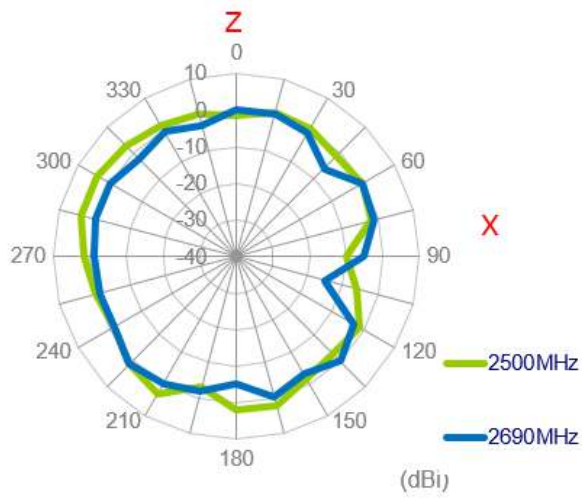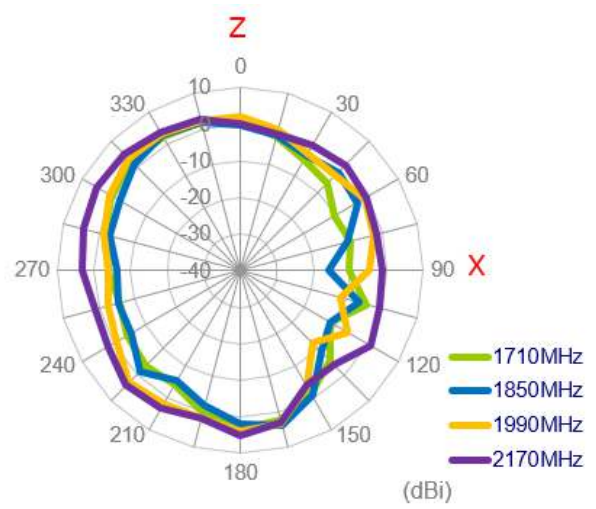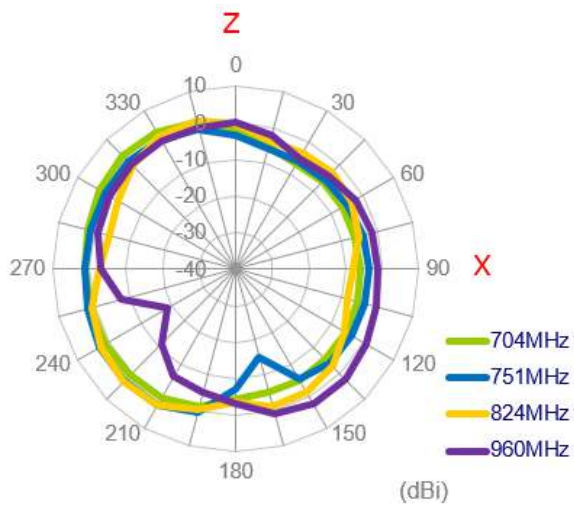





YZ Plane

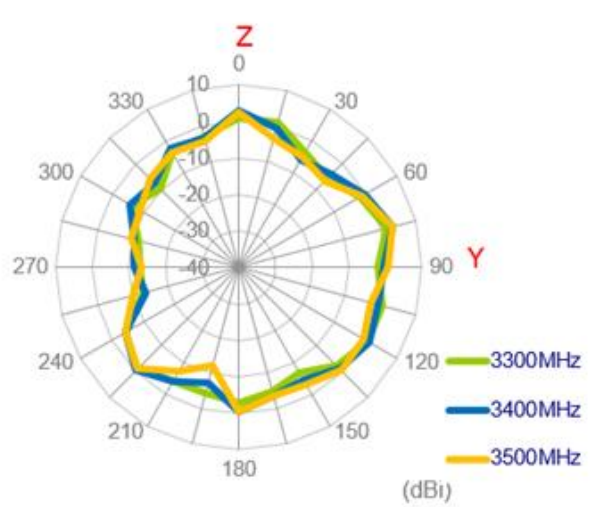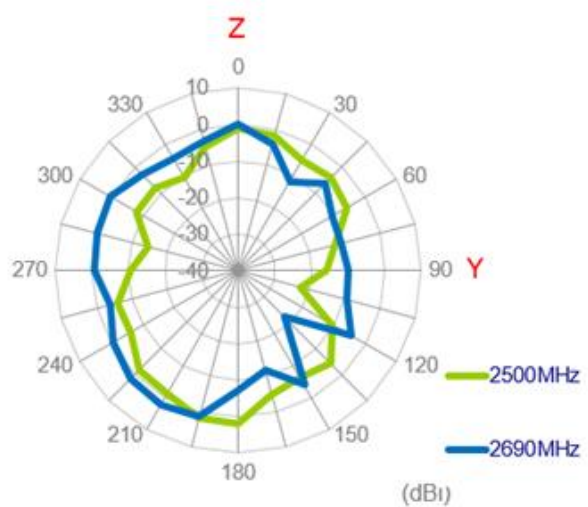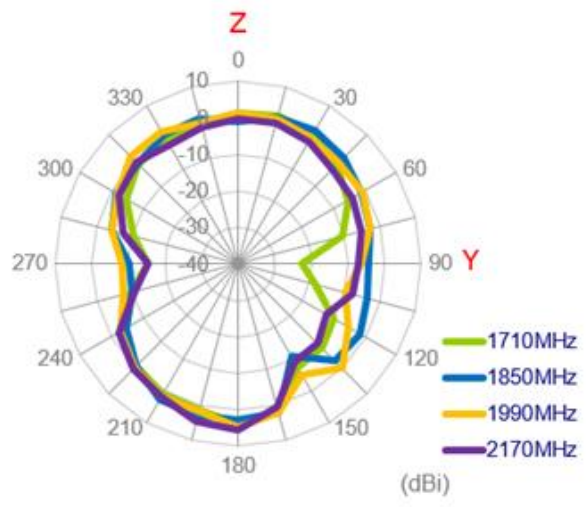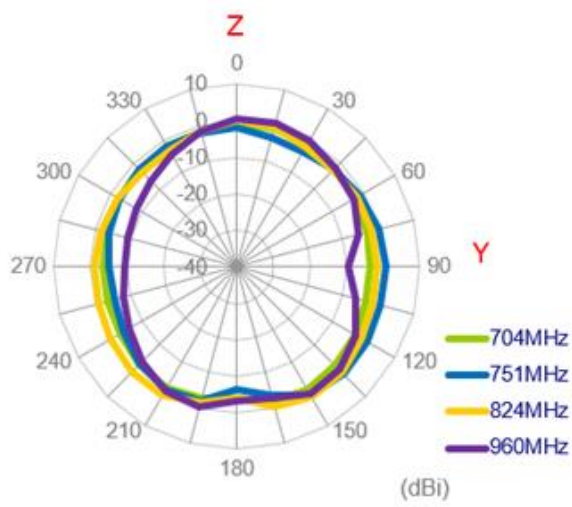


### 3.2.33 3D Radiation Patterns (LTE\_MIMO2 with 1M cable length on ABS)

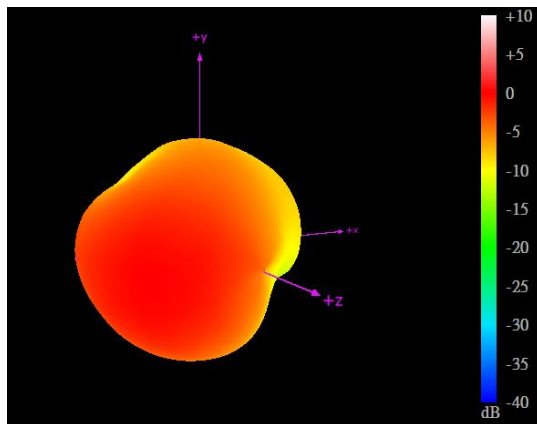


704MHz

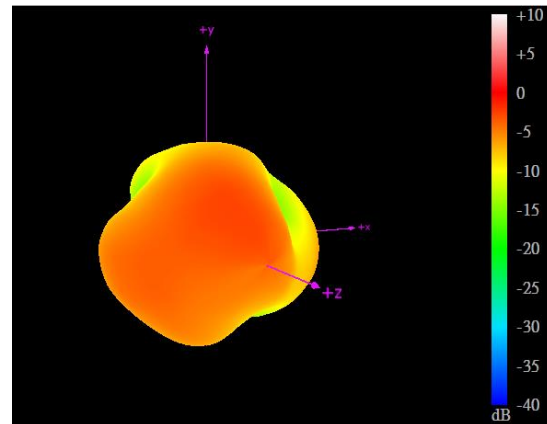


960MHz

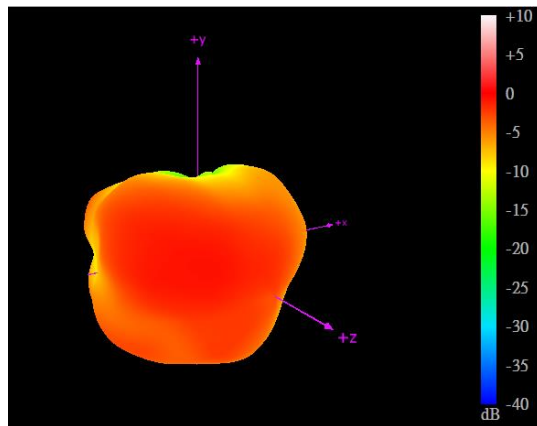


1710MHz

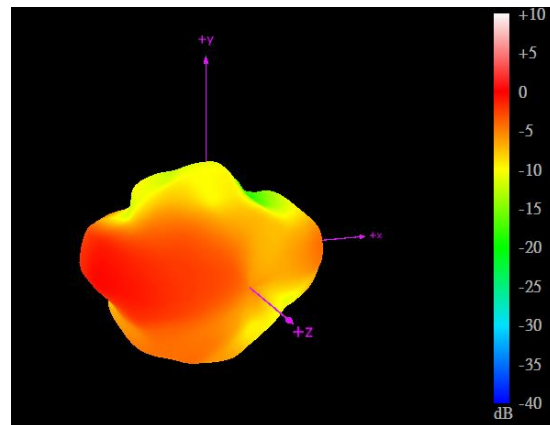

2170MHz






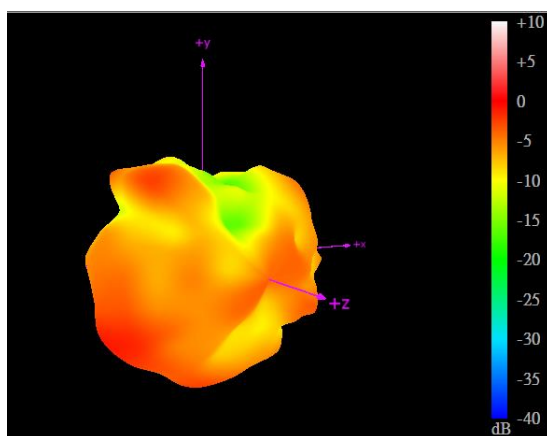


2690MHz

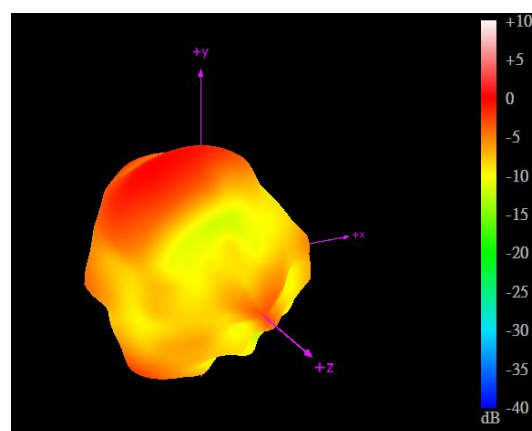


3500MHz


### 3.2.34 2D Radiation Patterns (Wi-Fi\_MIMO1 with 1M cable length on ABS)

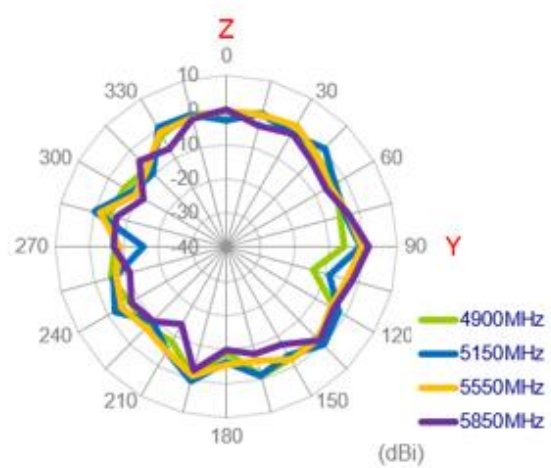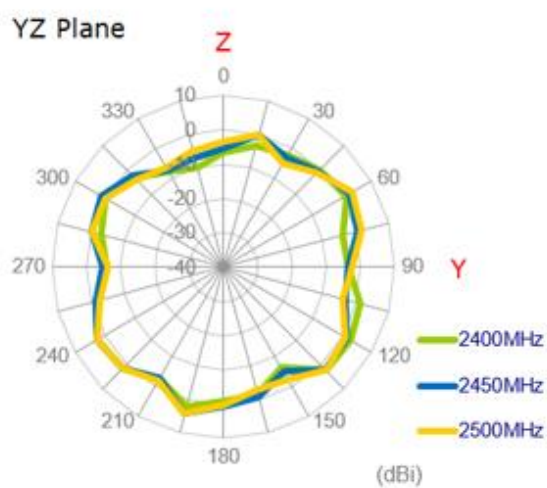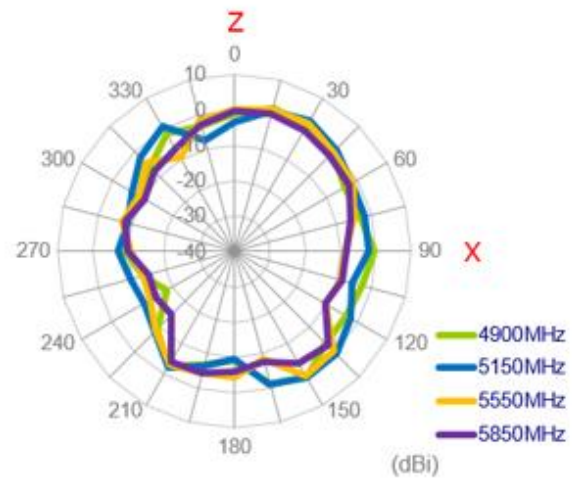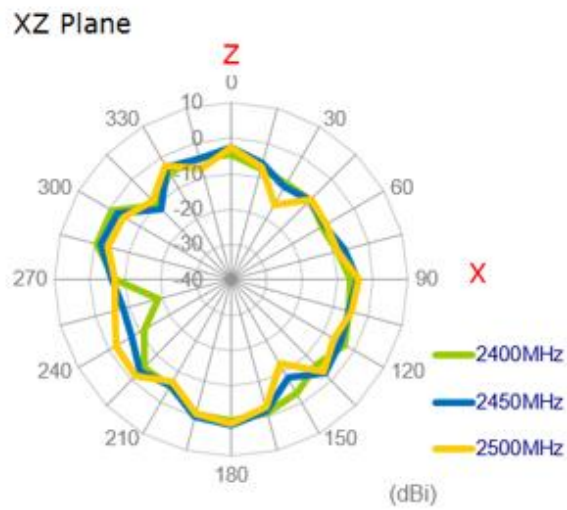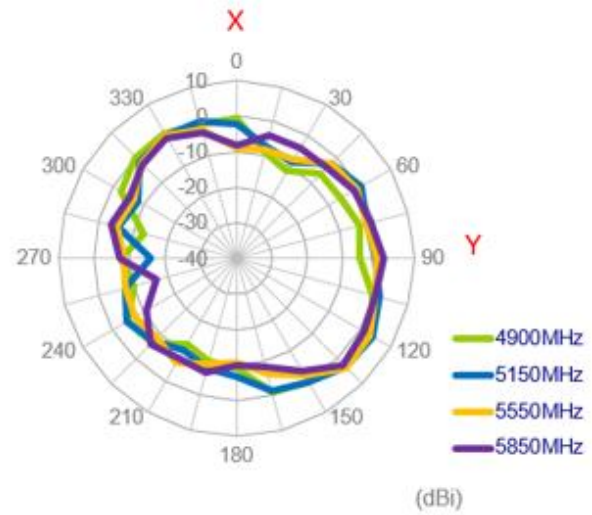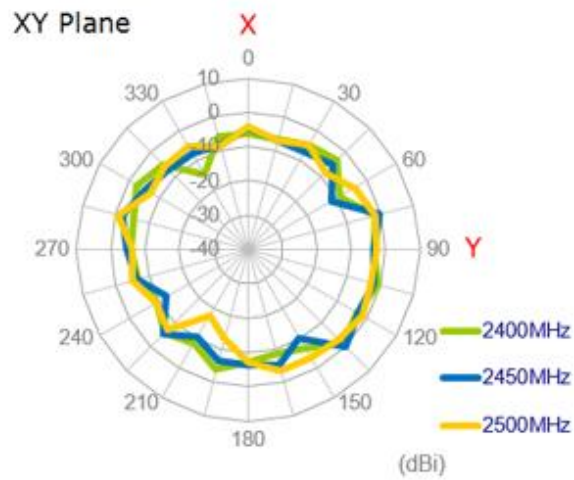

3.2.35 3D Radiation Patterns Pattern (Wi-Fi\_MIMO1 with 1M cable length on ABS)






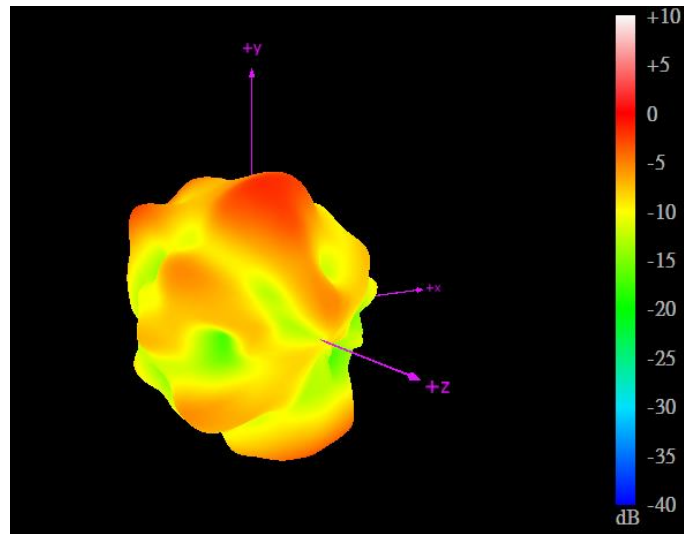


2450MHz

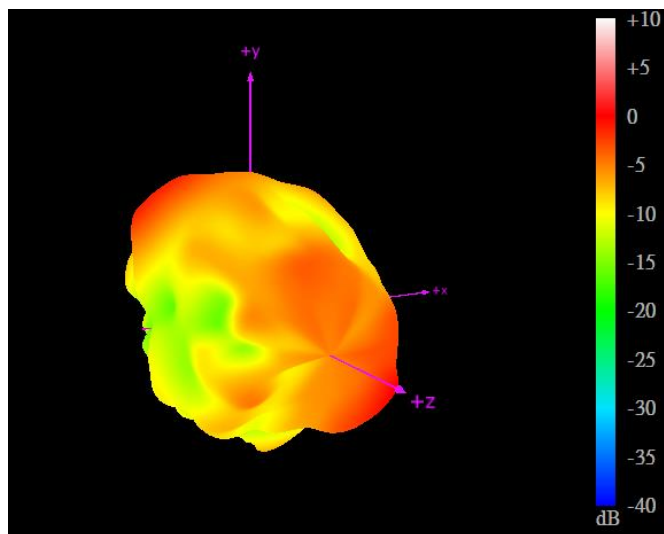


5550MHz

### 3.2.36 2D Radiation Patterns (LTE\_MIMO1 with 1M cable length on ABS)

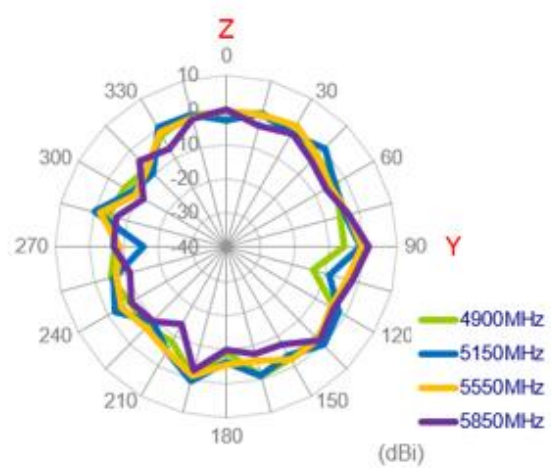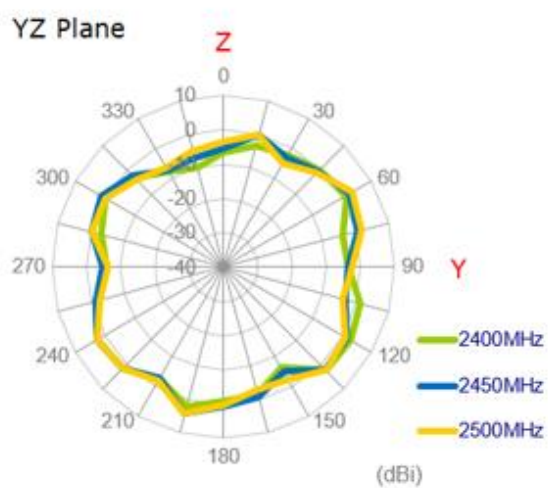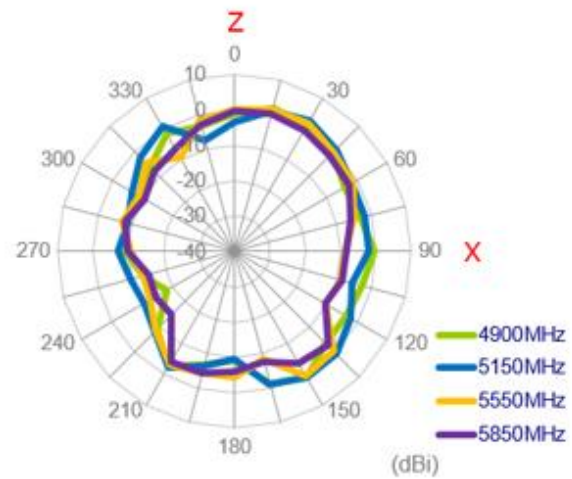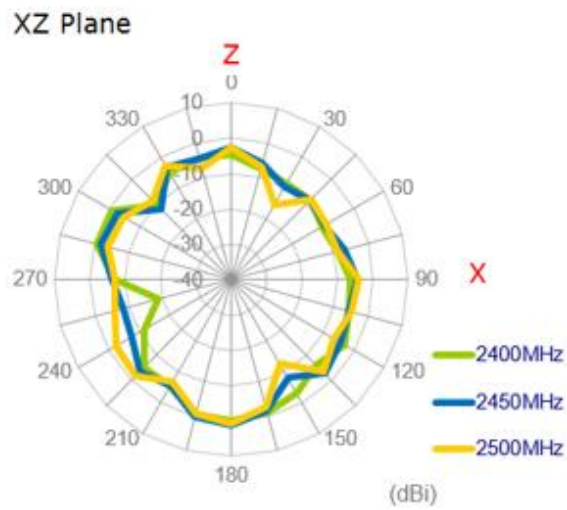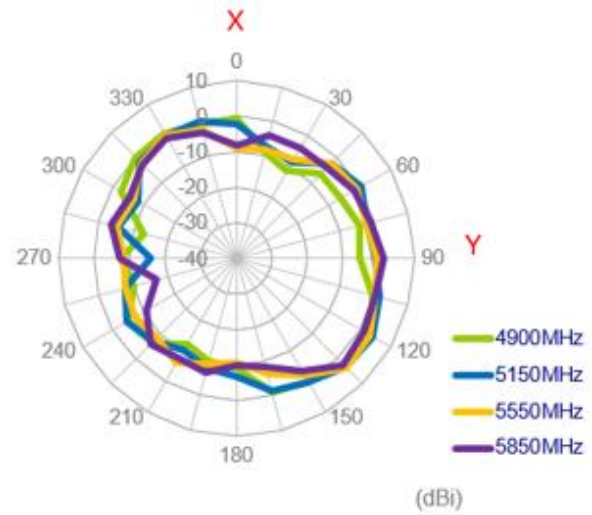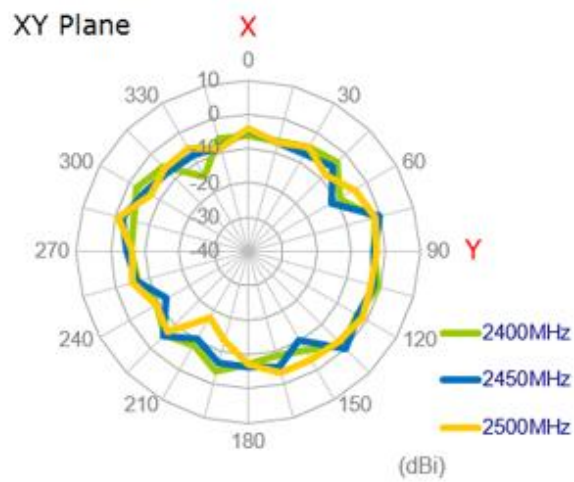




**3.2.37** 3D Radiation Patterns Pattern (Wi-Fi\_MIMO2 with 1M cable length on ABS)

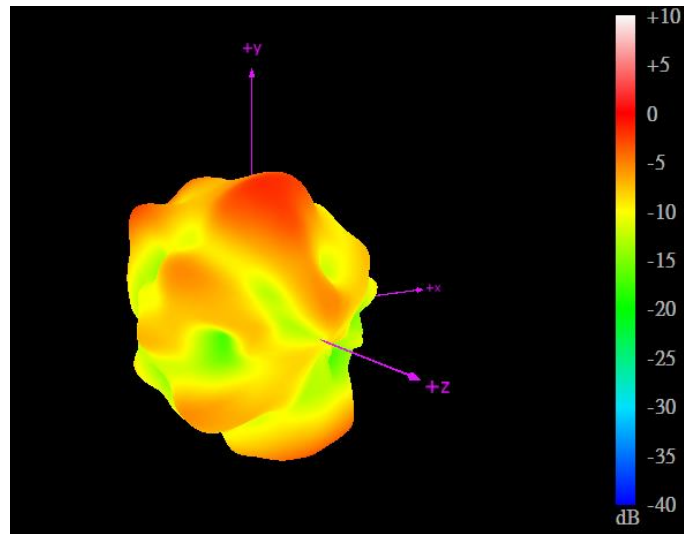


2450MHz

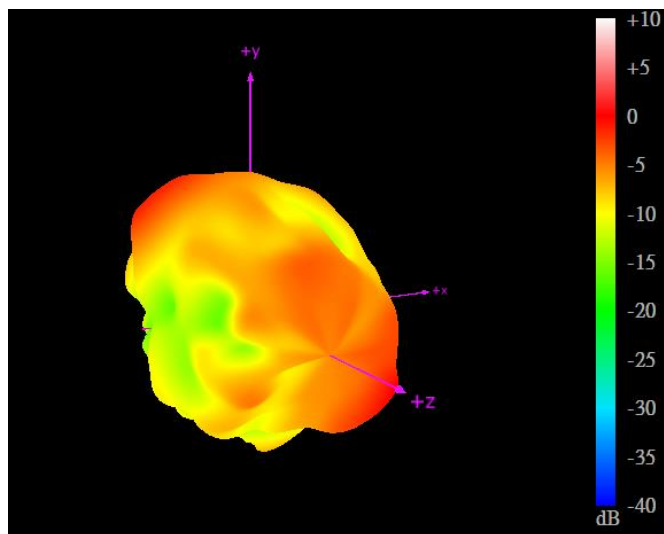

5550MHz

3.2.38 Test Setup for Antenna Radiation Pattern




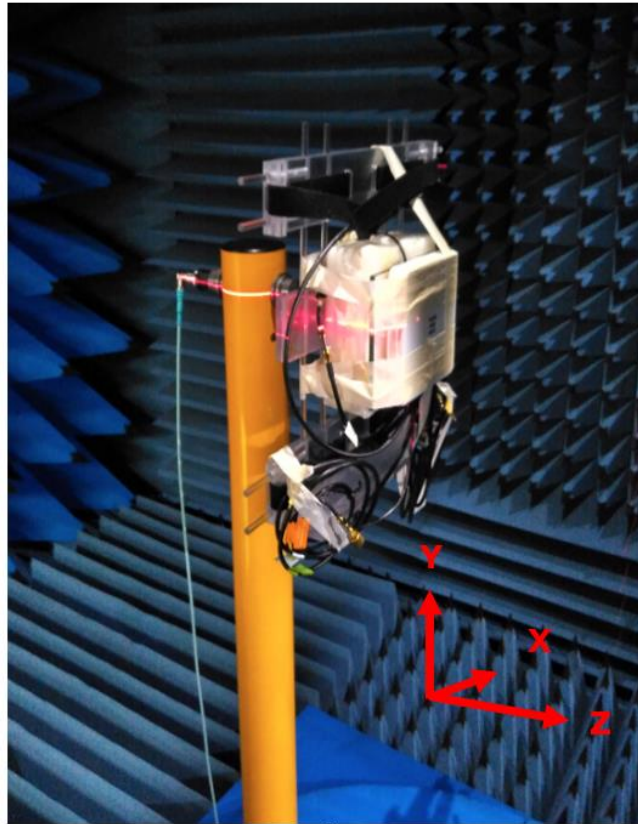


On glass







**3.2.39** 2D Radiation Patterns (LTE\_MIMO1 with 1M cable length on glass)





**XY Plane**

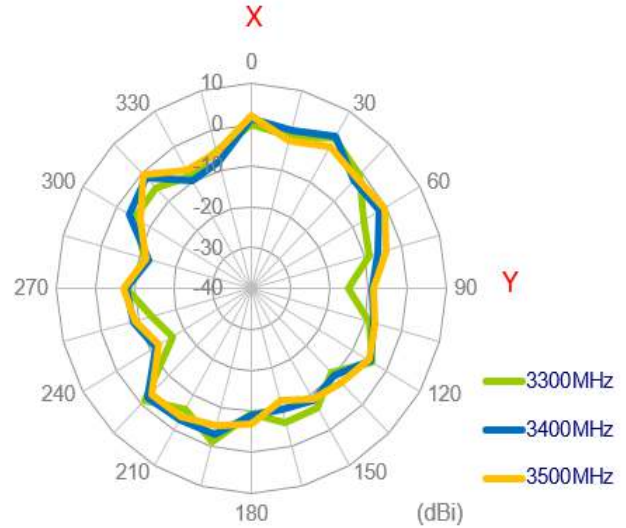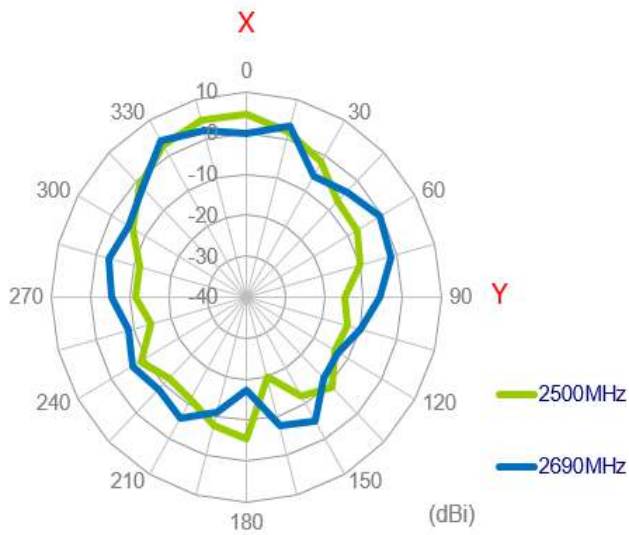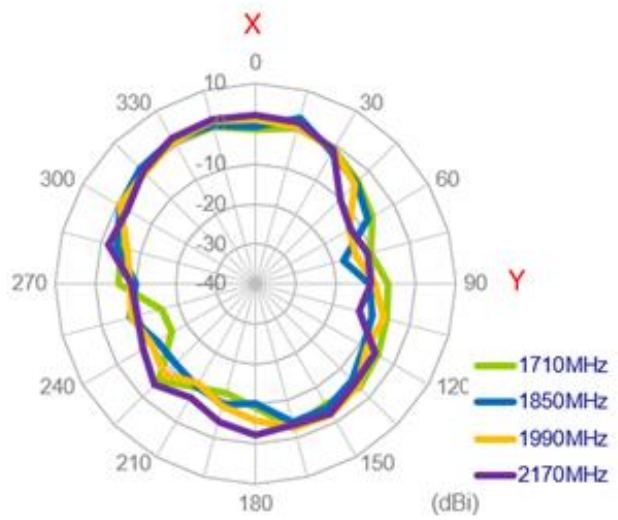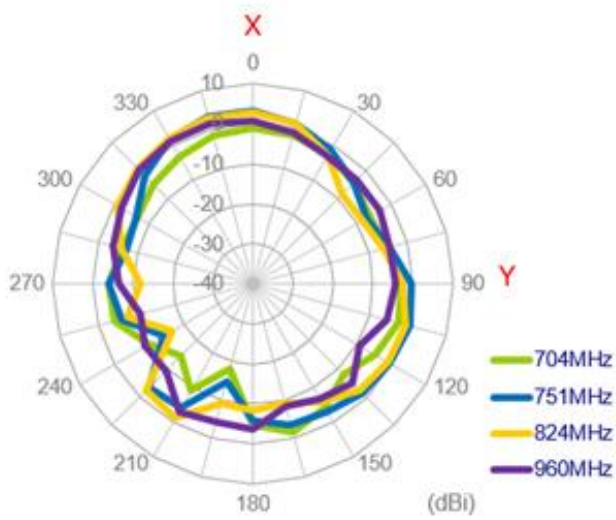


XZ Plane

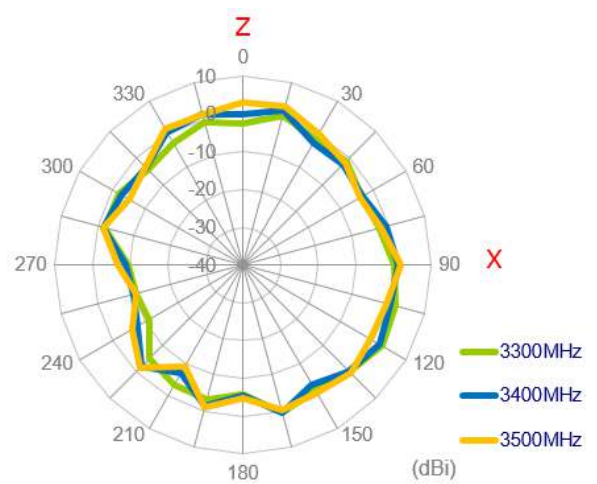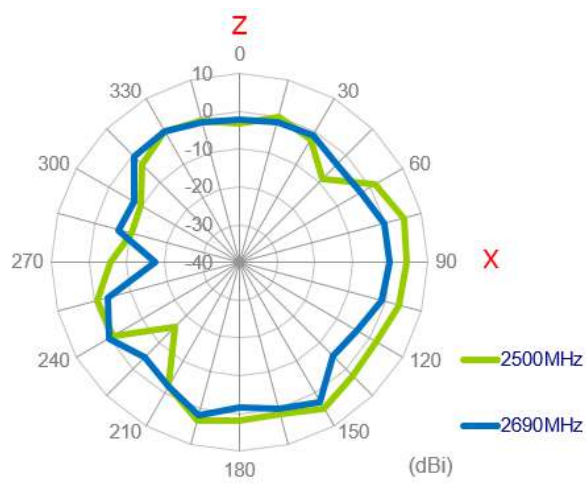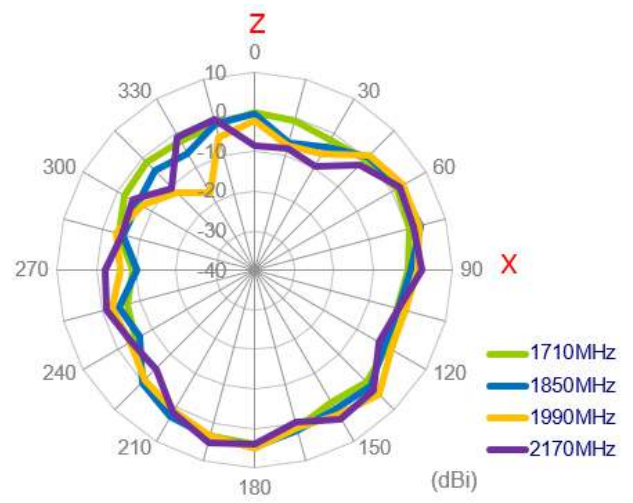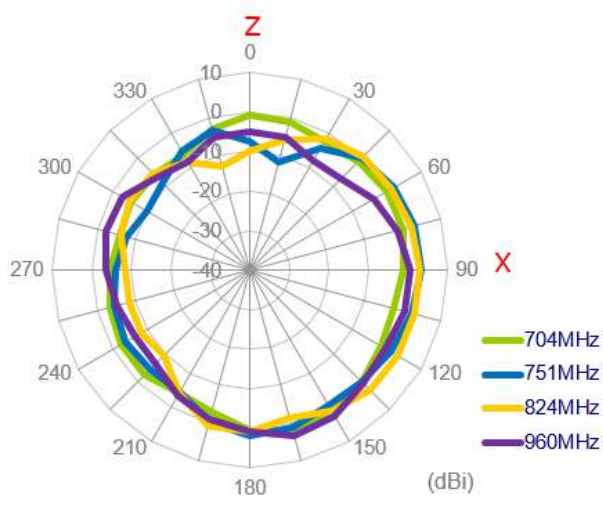


# YZ Plane

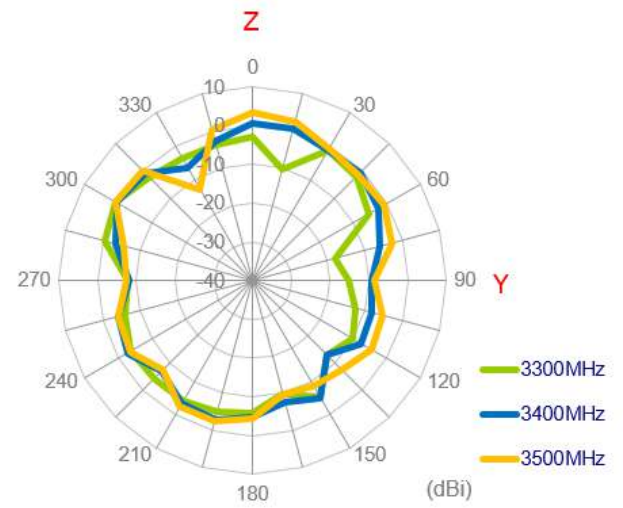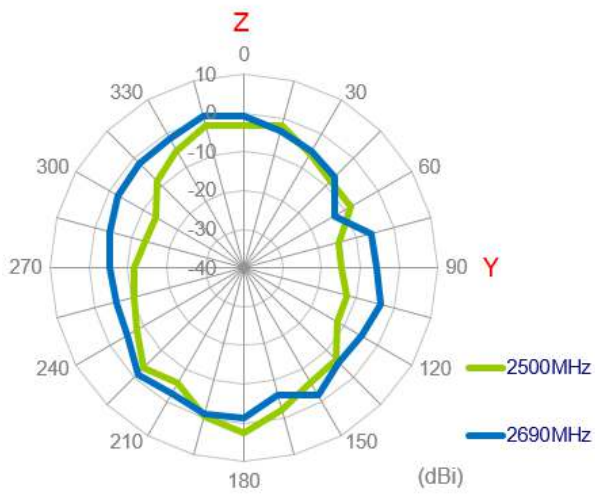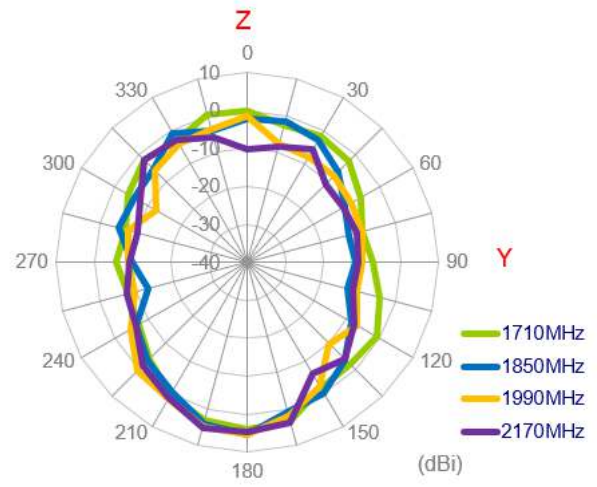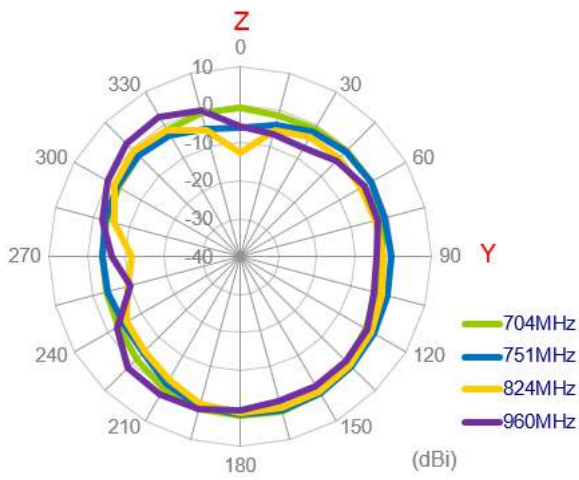


3.2.40 3D Radiation Patterns (LTE\_MIMO1 with 1M cable length on grass)

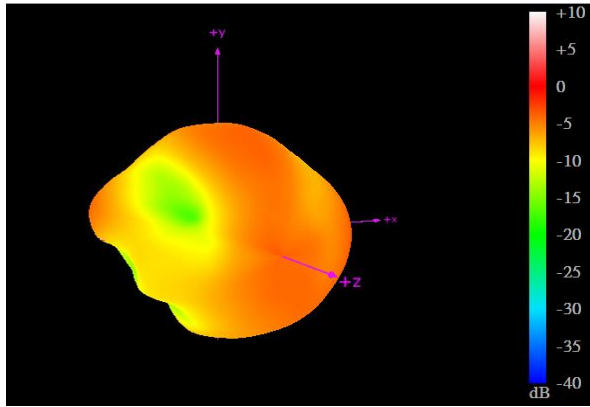


704MHz

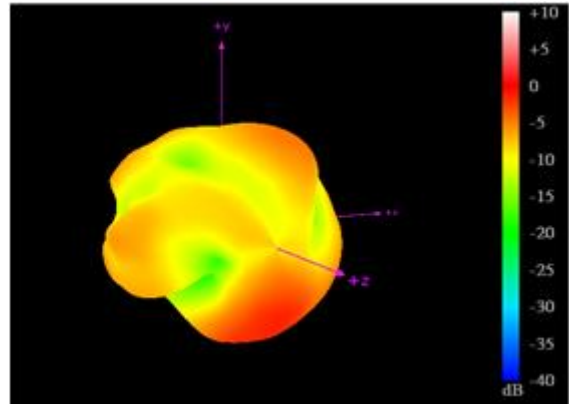


960MHz

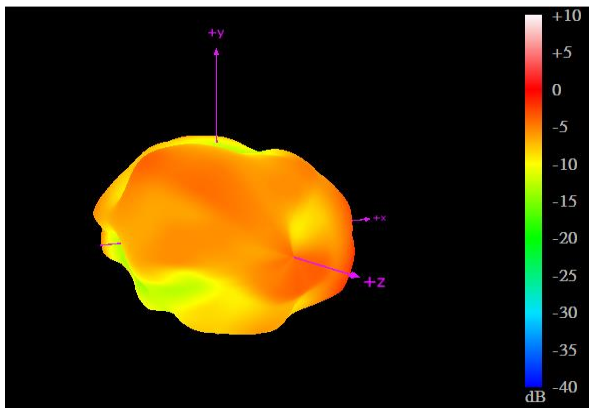


1710MHz

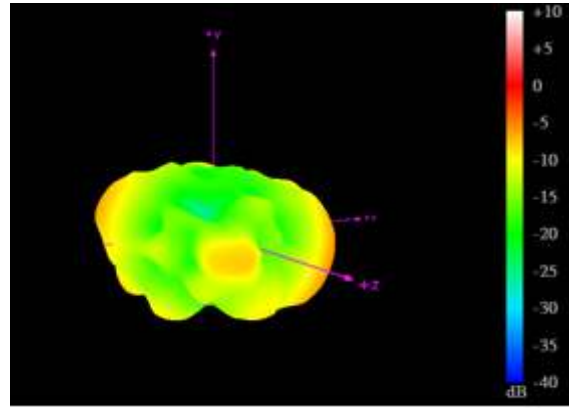

2170MHz

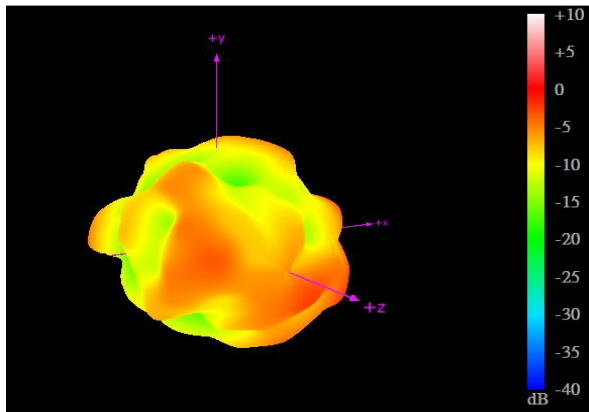

2690MHz




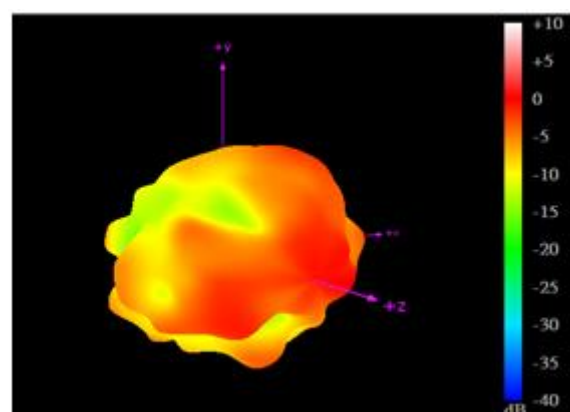


3500MHz







3.2.41 2D Radiation Patterns (LTE\_MIMO2 with 1M cable length on glass)

XY Plane

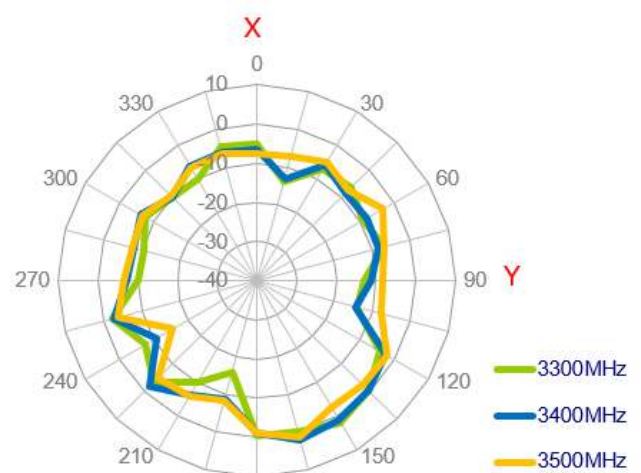
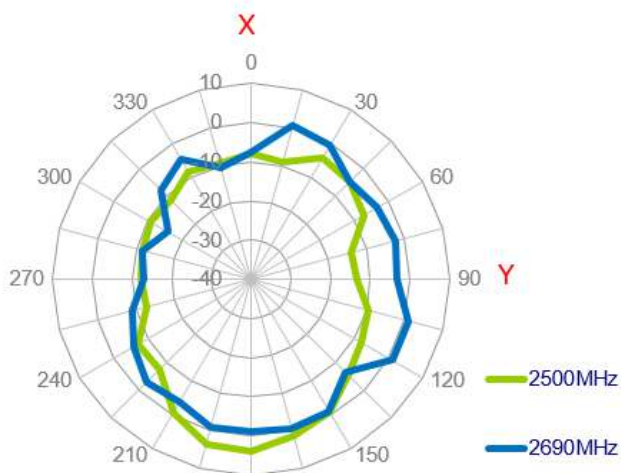
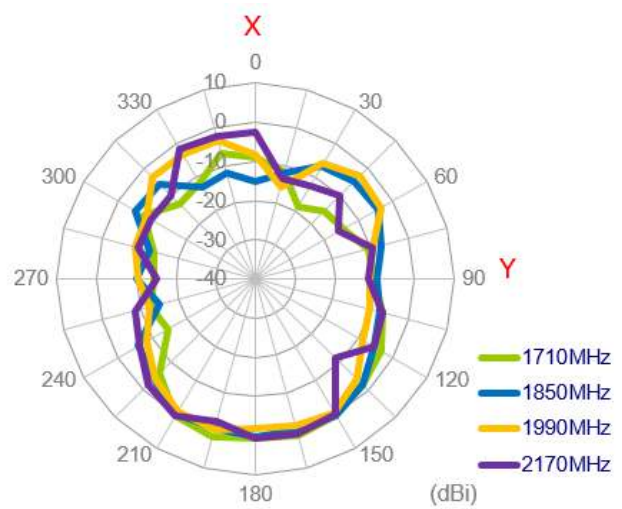
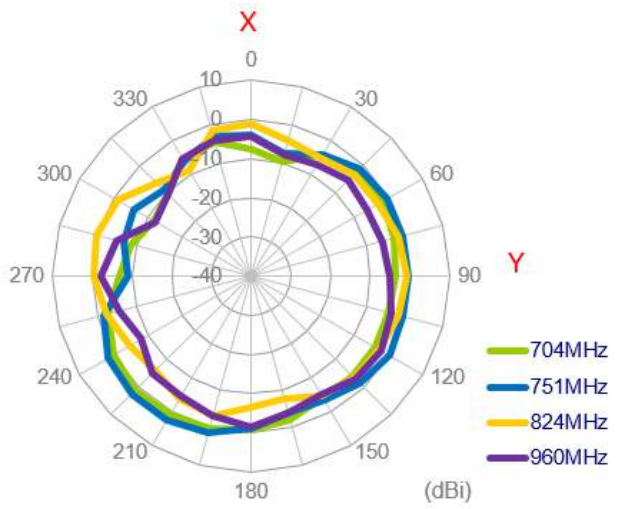


XZ Plane

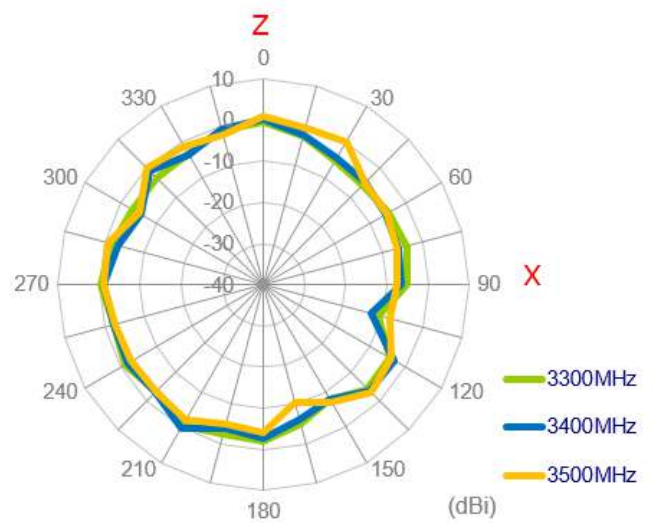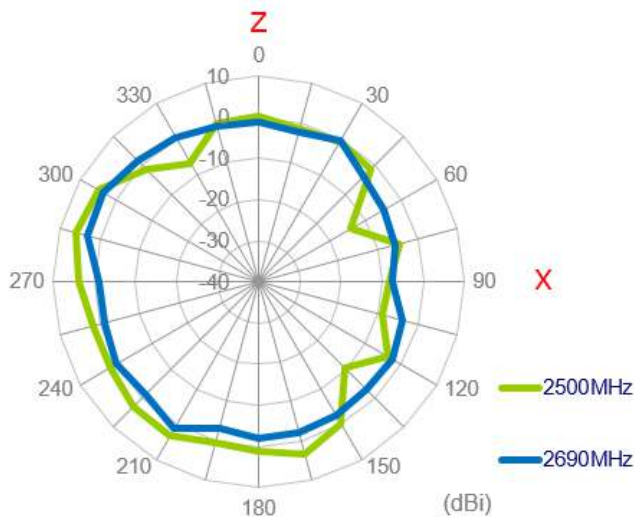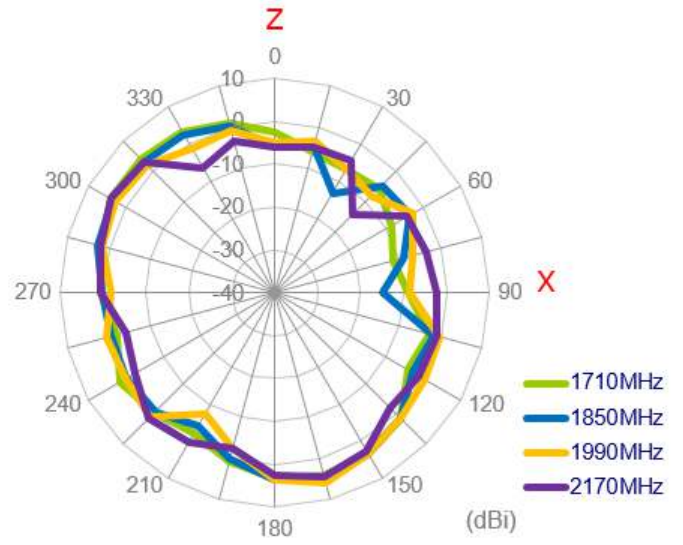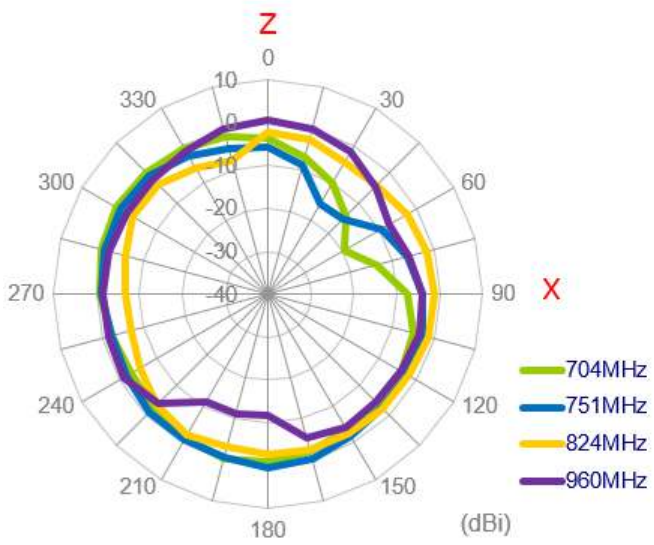





YZ Plane

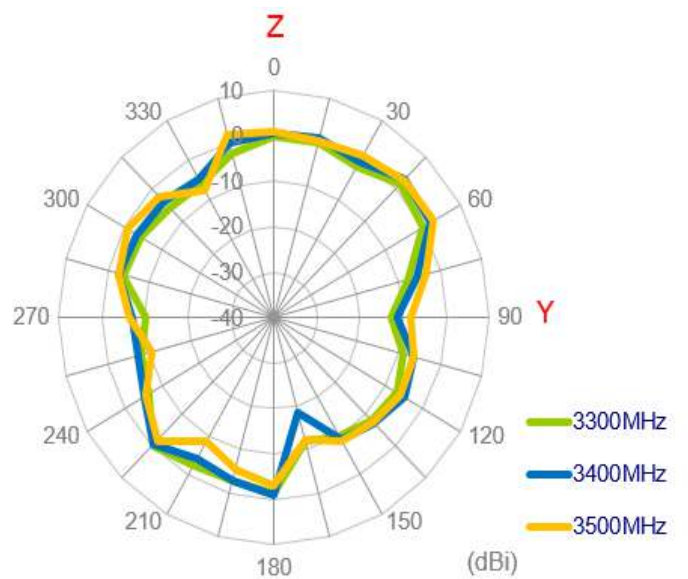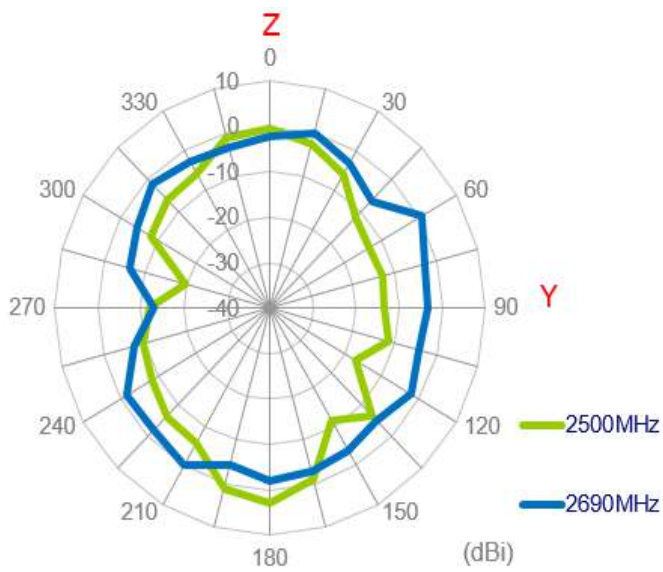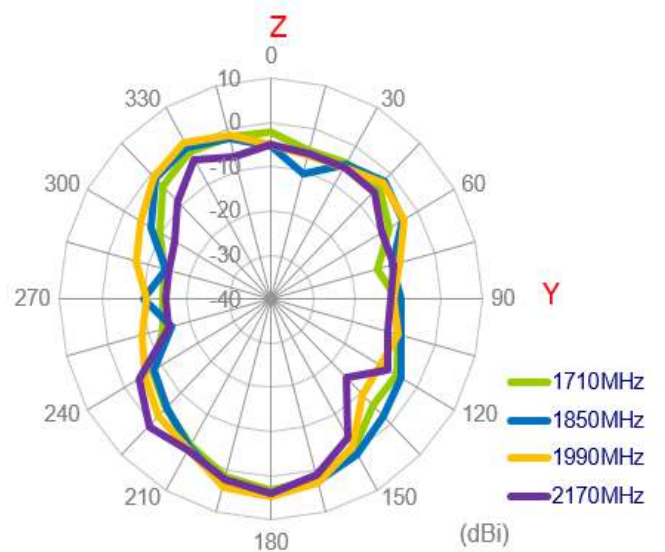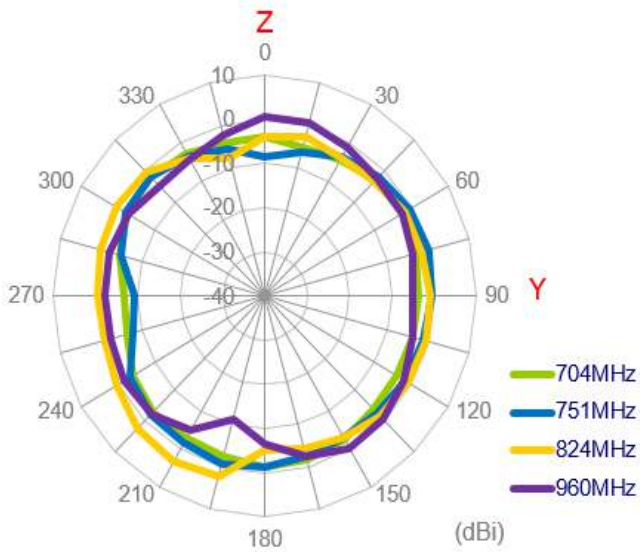


3.2.42 3D Radiation Patterns (LTE\_MIMO2 with 1M cable length on grass)

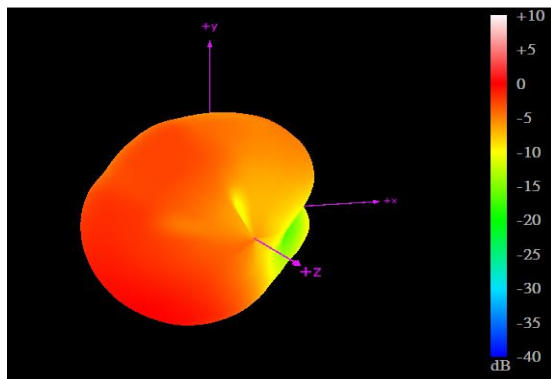


704MHz

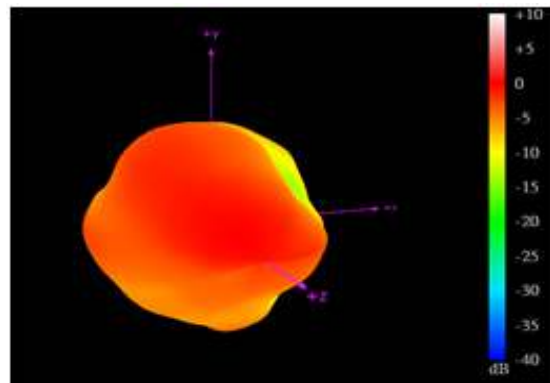


960MHz

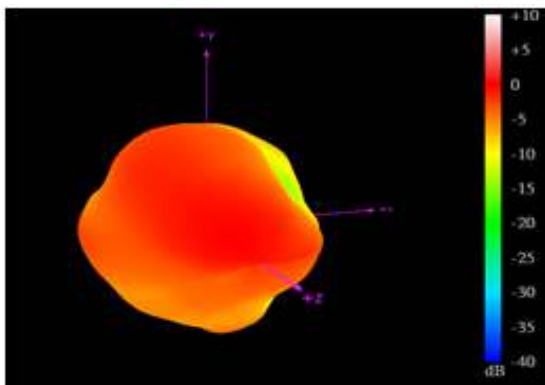


1710MHz

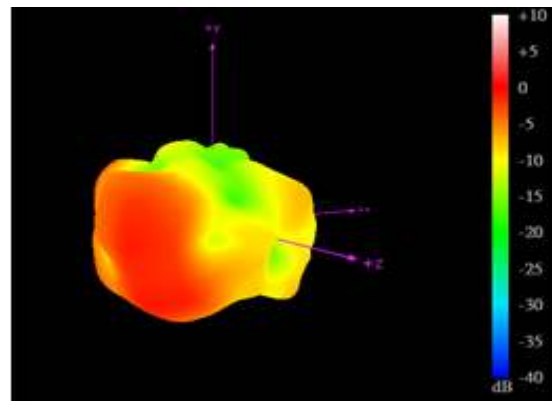

2170MHz

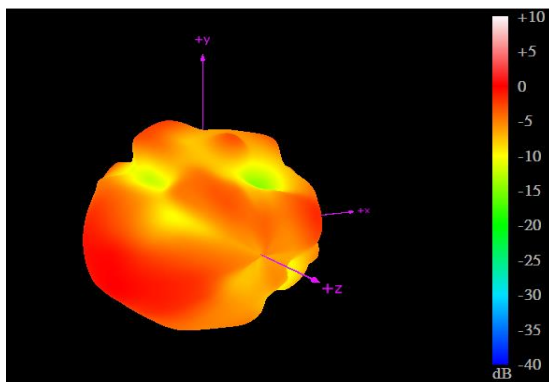



2690MHz

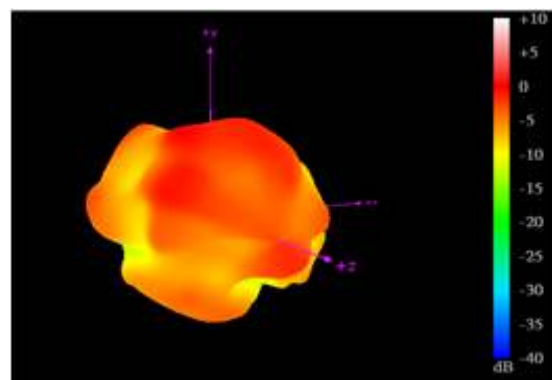



3500MHz

### 3.2.43 2D Radiation Patterns (Wi-Fi\_MIMO1 with 1M cable length on glass)



XY Plane

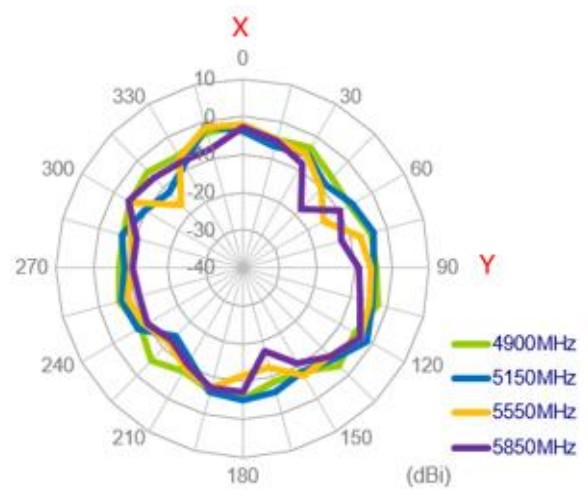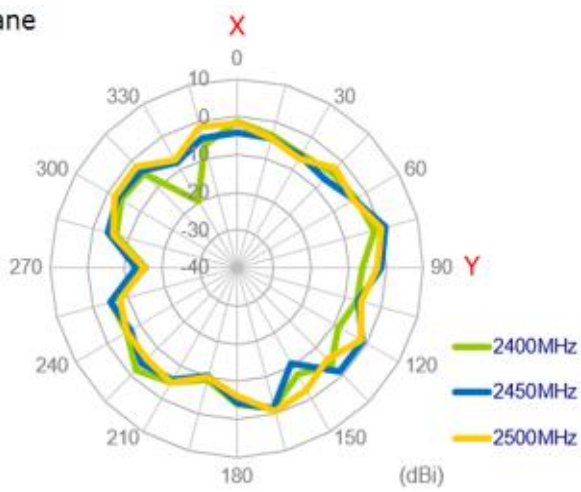


XZ Plane

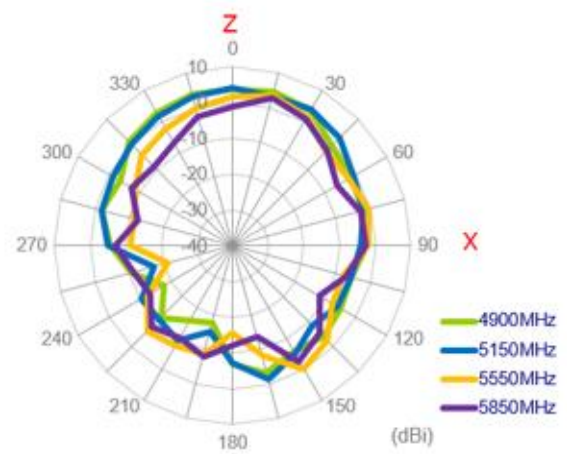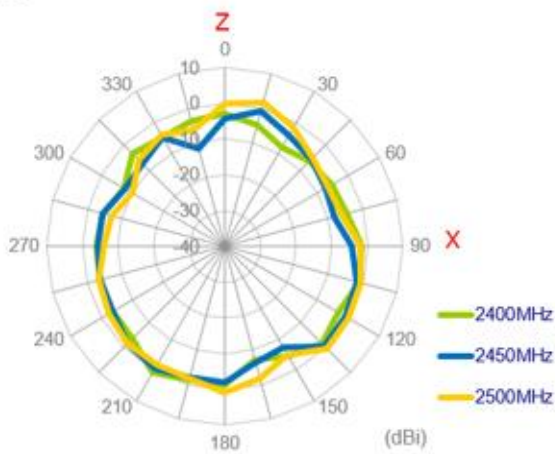


YZ Plane

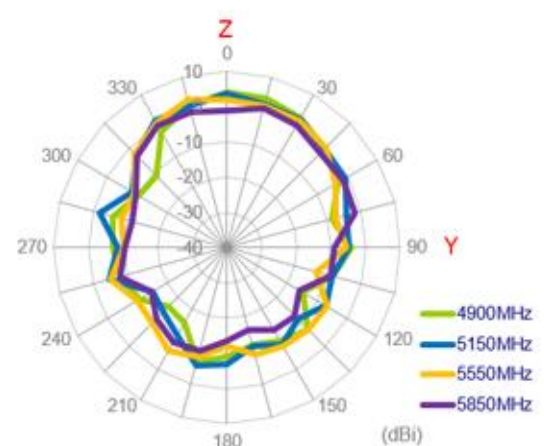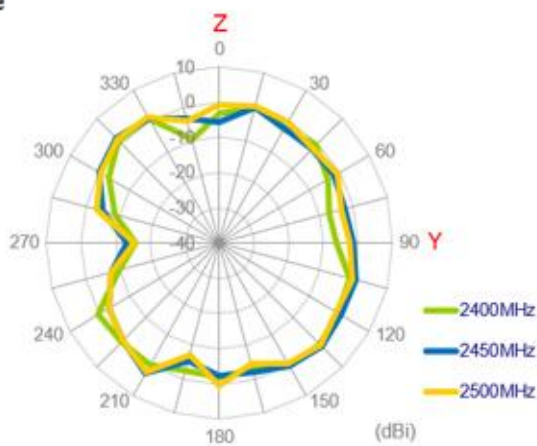

3.2.44 3D Radiation Patterns Pattern (Wi-Fi\_MIMO1 with 1M cable length on glass)

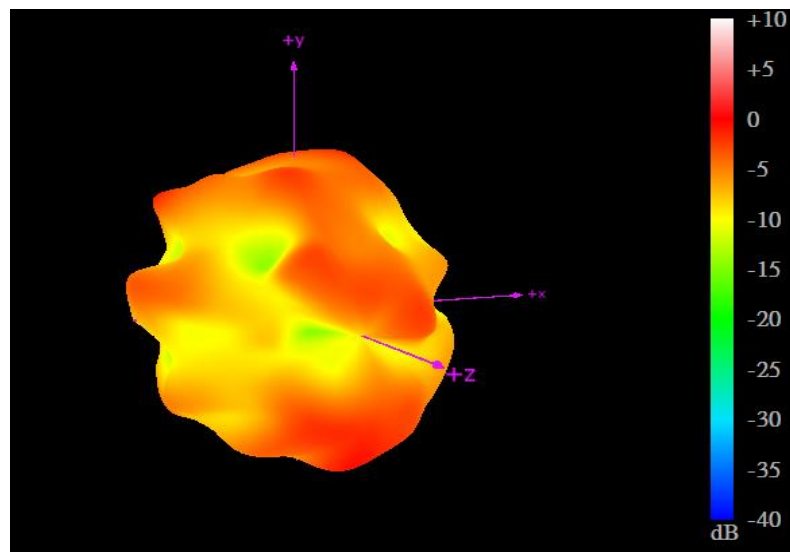

2450MHz


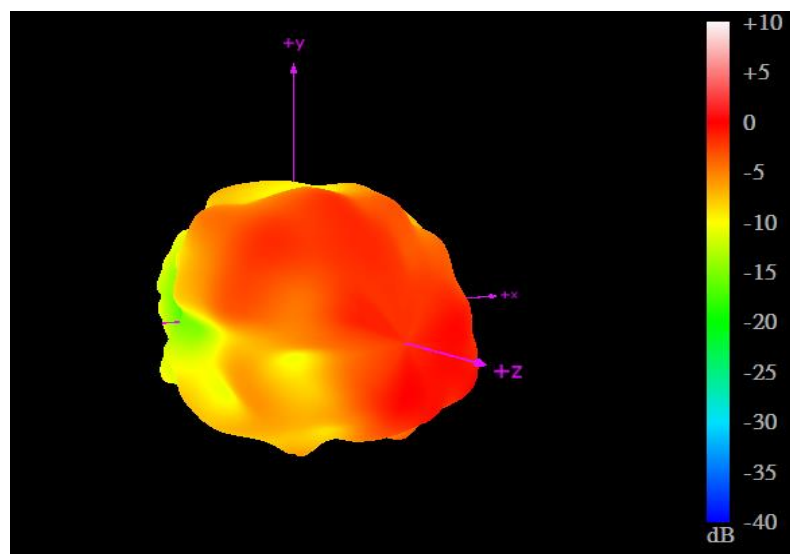


5550MHz





3.2.45 2D Radiation Patterns (Wi-Fi\_MIMO2 with 3M cable length on glass)



XY Plane

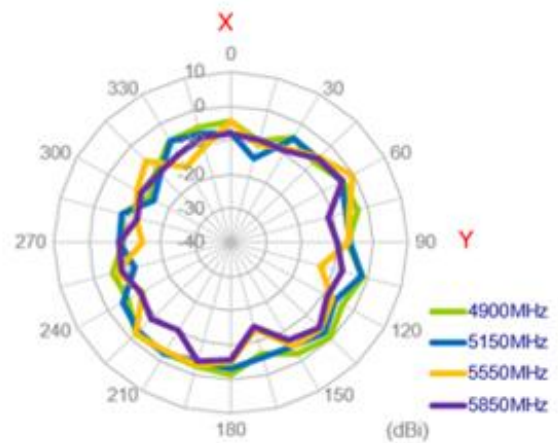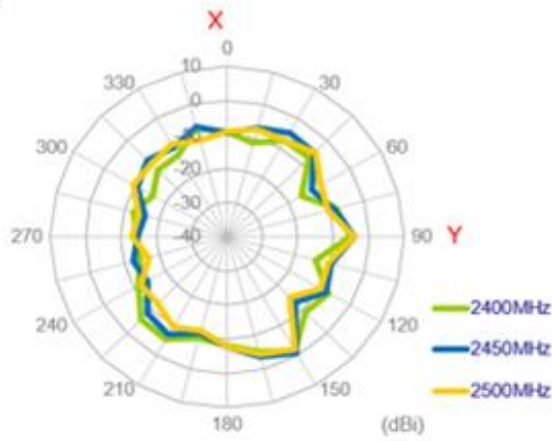


XZ Panel

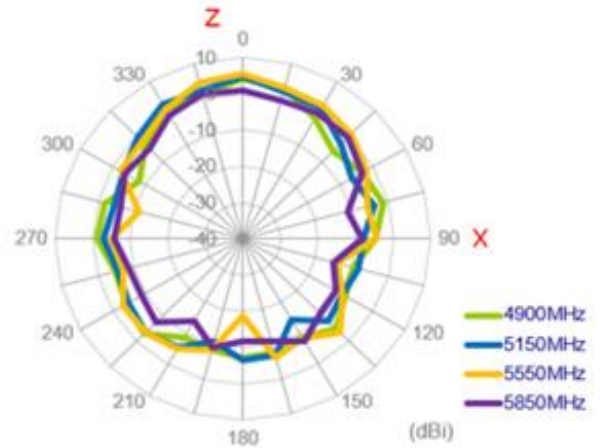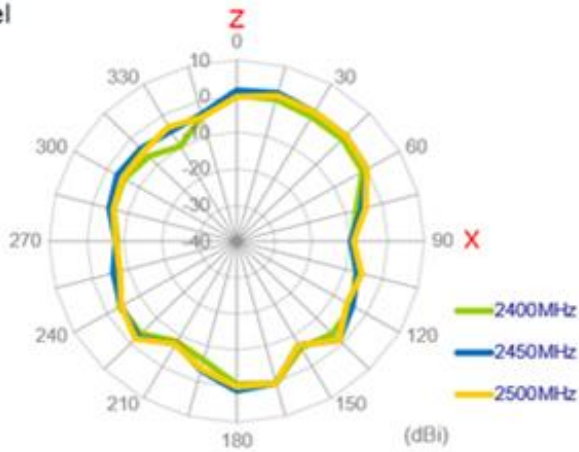


YZ Plane

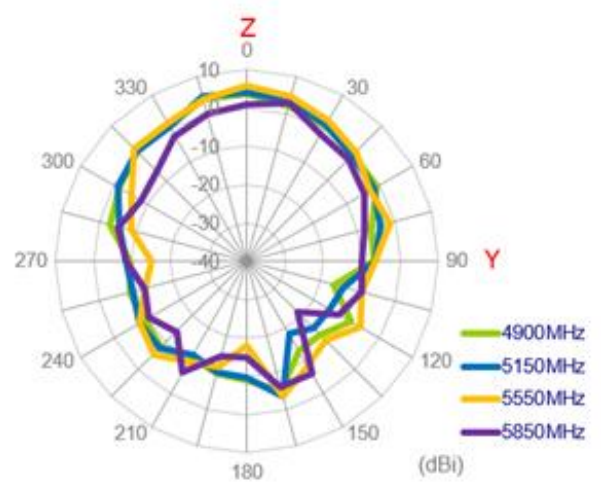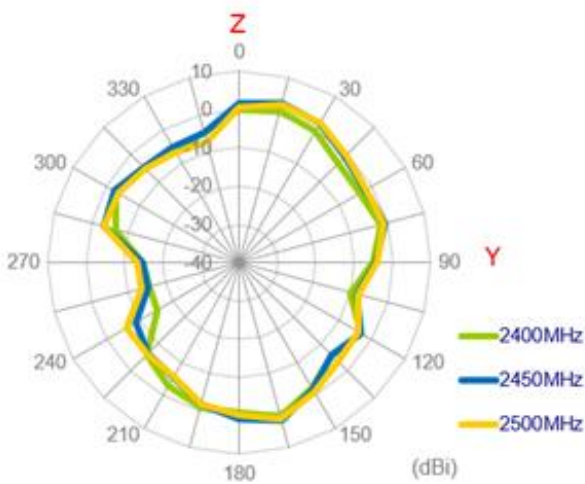

3.2.46 3D Radiation Patterns Pattern (Wi-Fi\_MIMO2 with 1M cable length on glass)

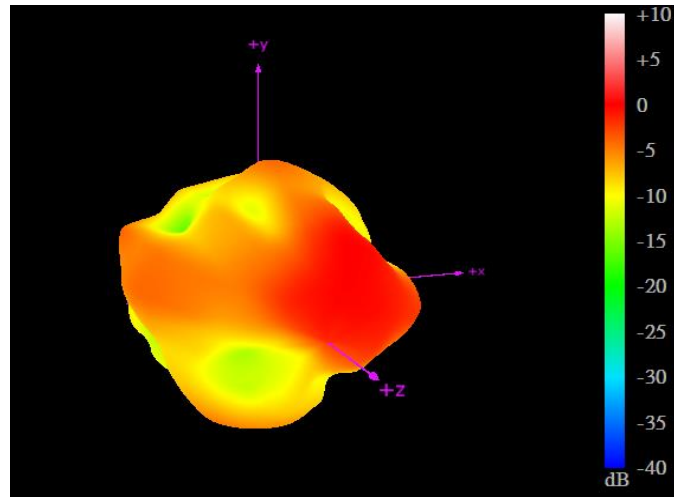


2450MHz

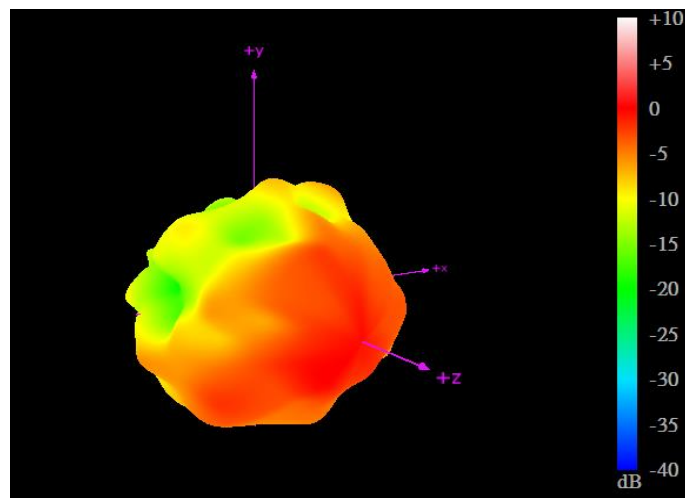

5550MHz







3.2.47 Test Setup for Antenna Radiation Pattern

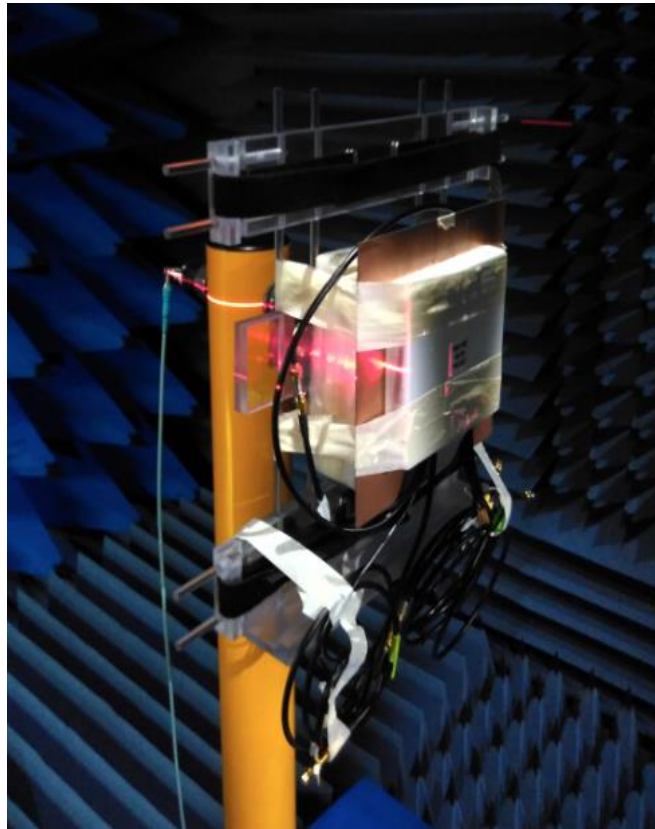





On metal

3.2.48 2D Radiation Patterns (LTE\_MIMO1 with 1M cable length on metal)





XY Plane

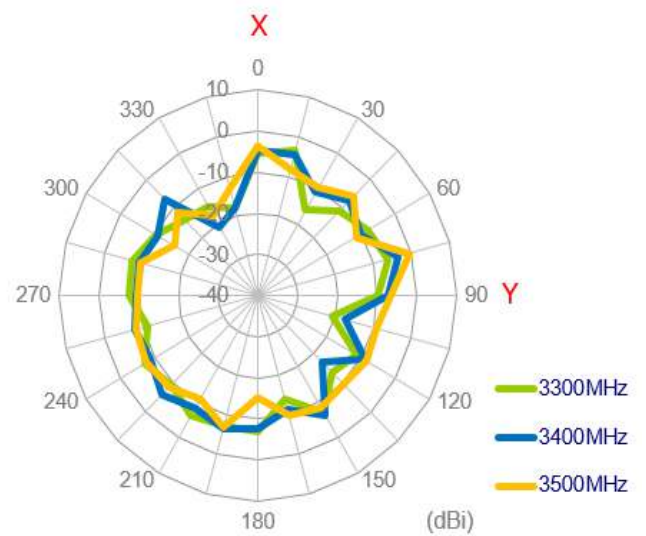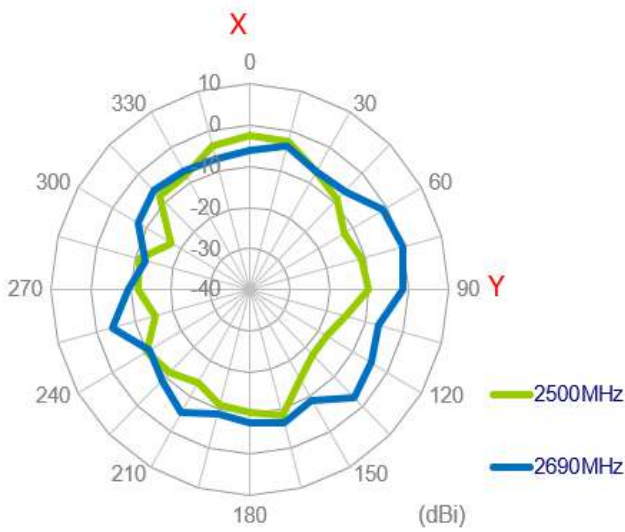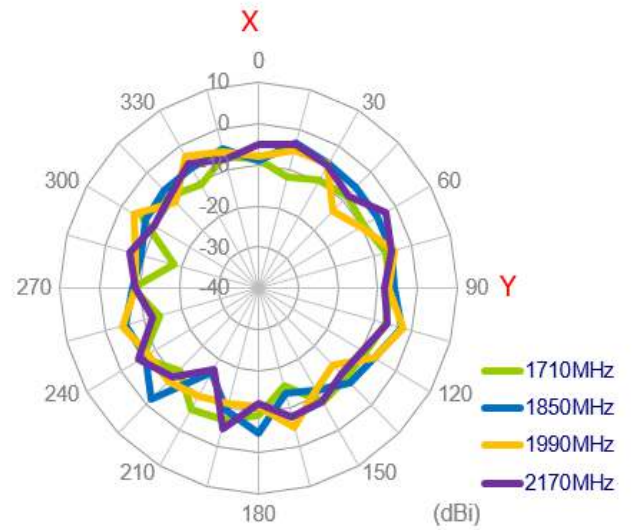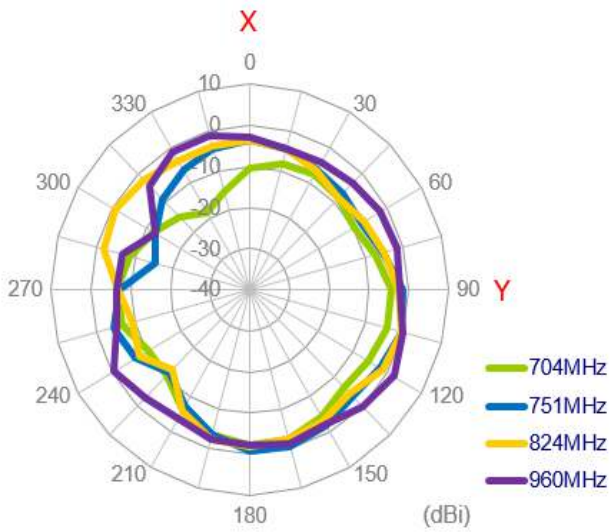


XZ Plane

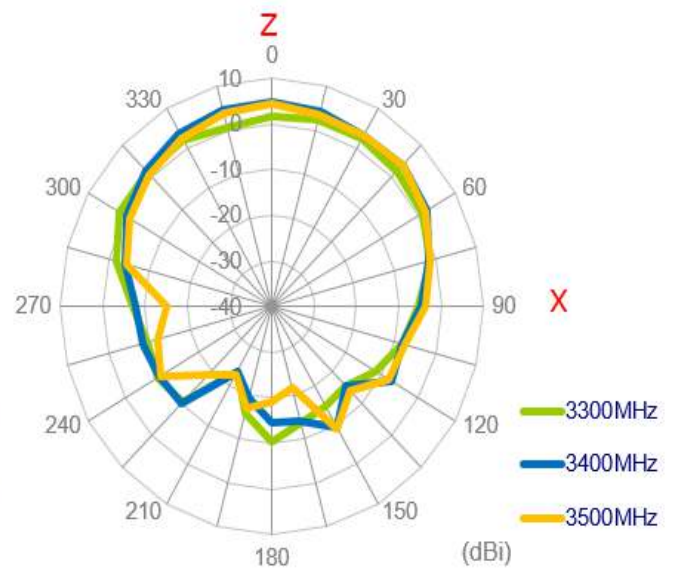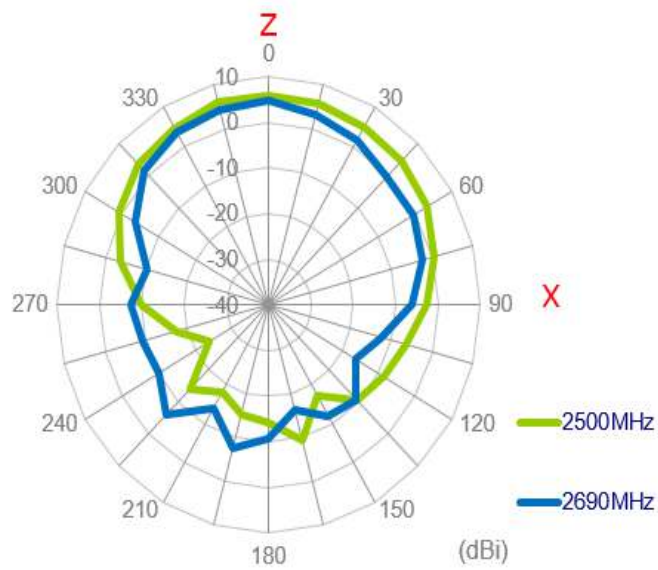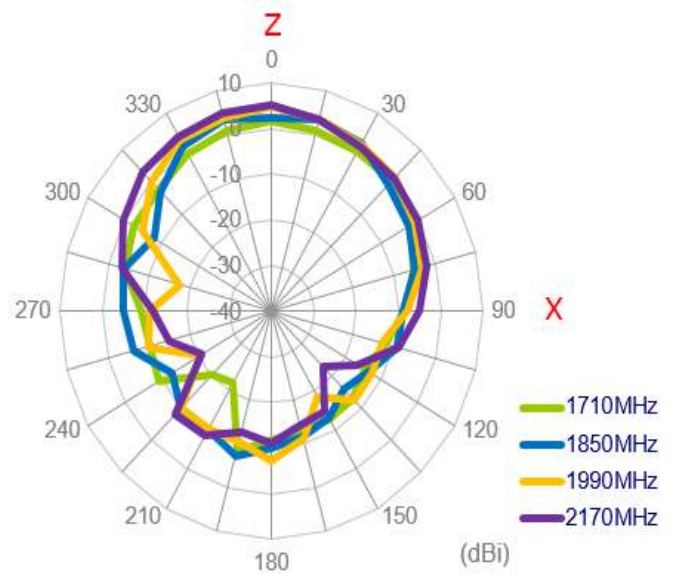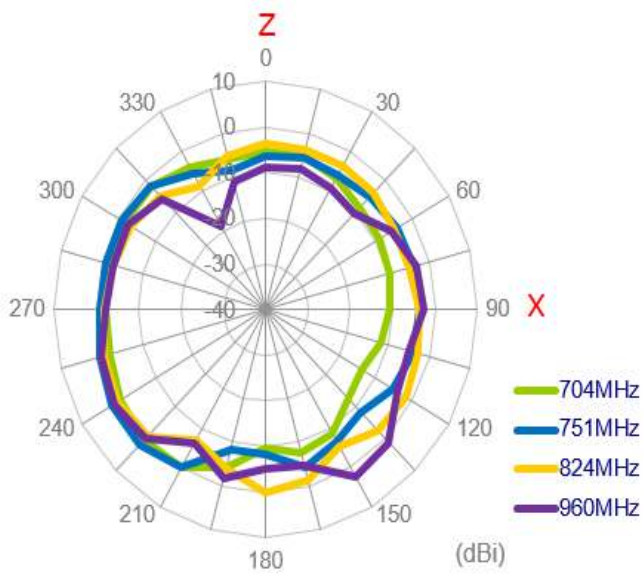


YZ Plane

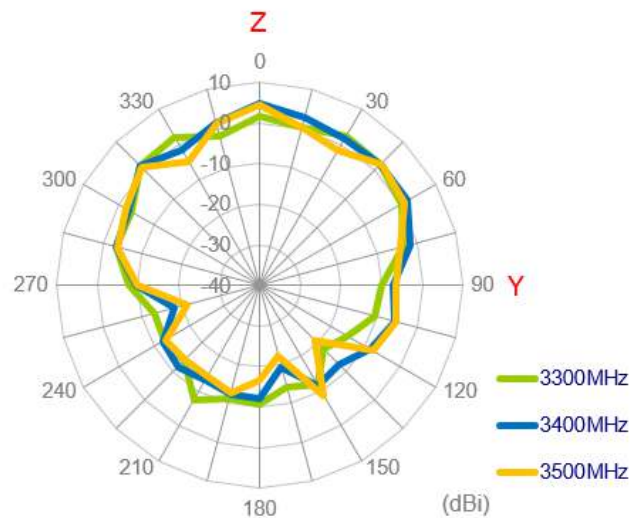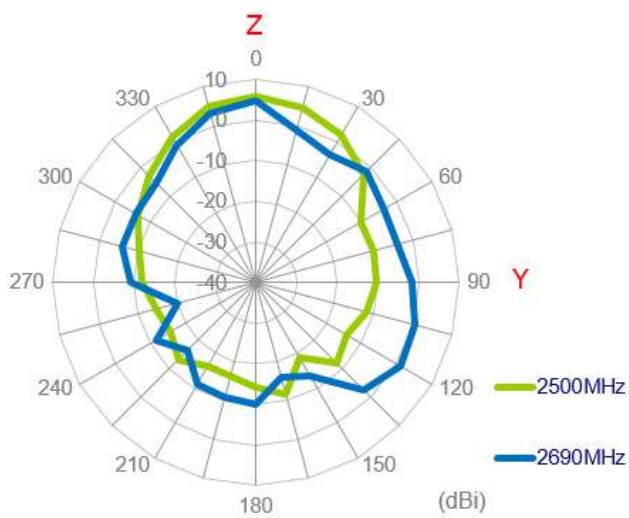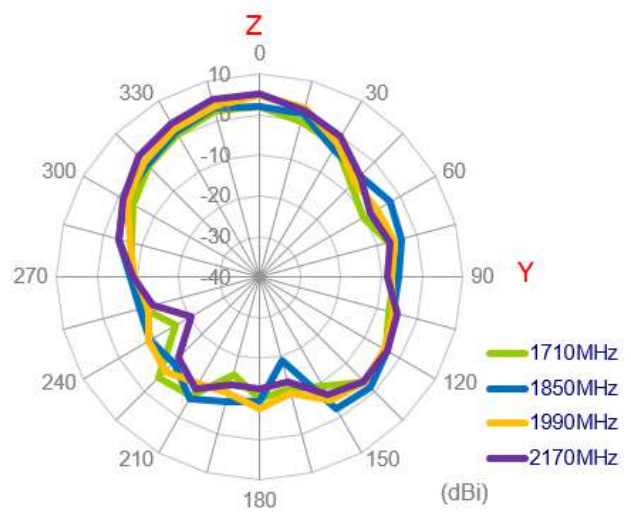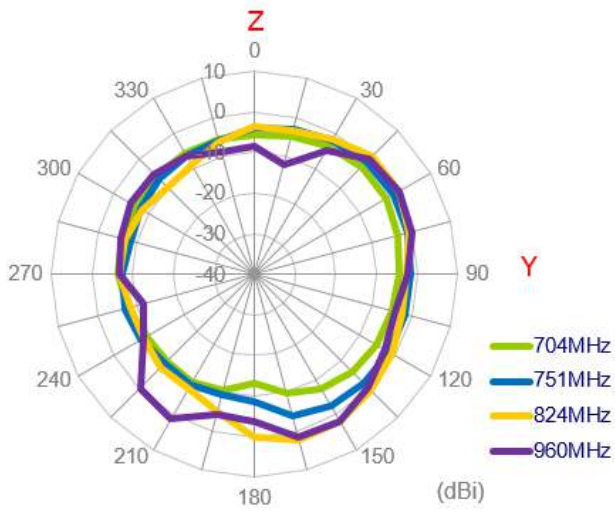


**3.2.49** 3D Radiation Patterns (LTE\_MIMO2 with 1M cable length on metal)

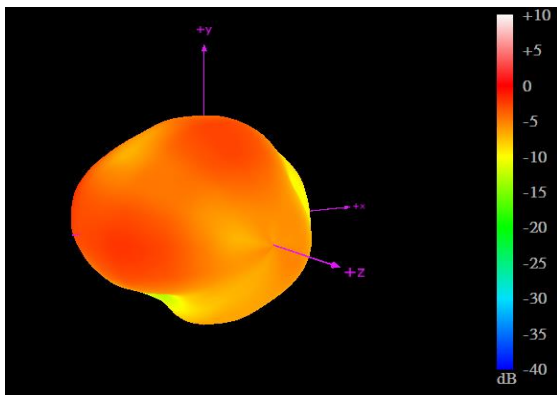


704MHz

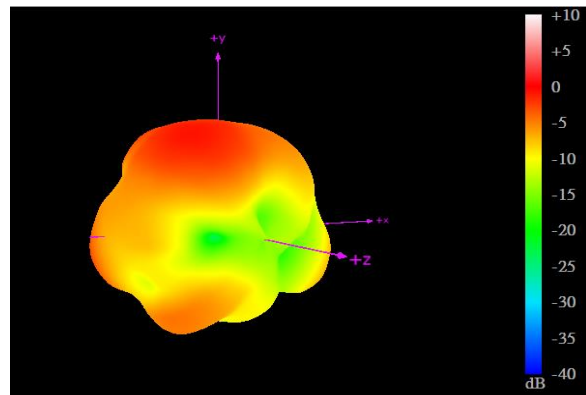


960MHz

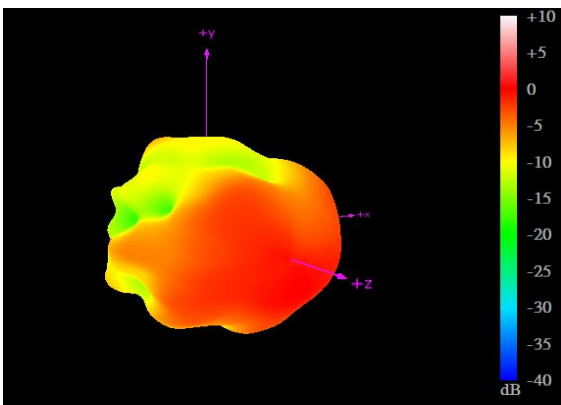


1710MHz

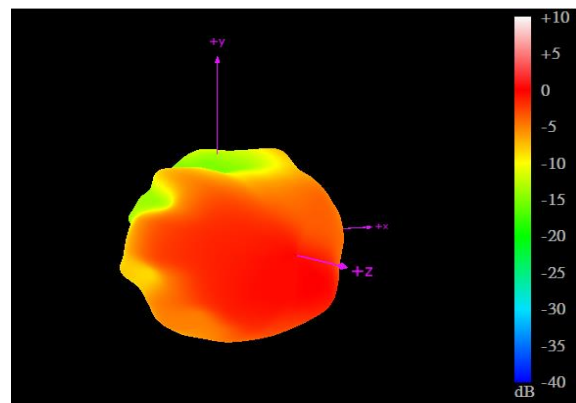

2170MHz

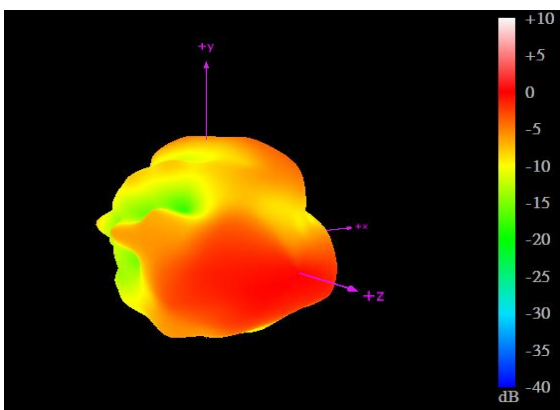

2690MHz




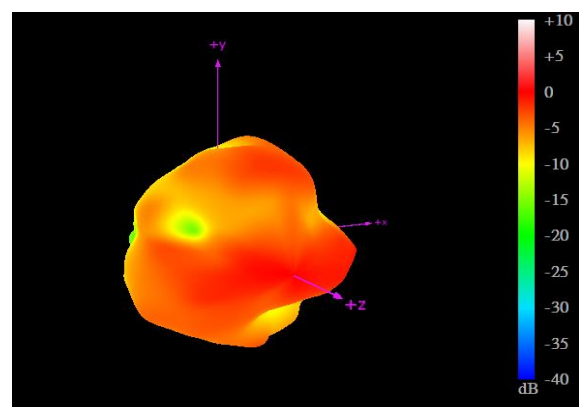


3500MHz







### 3.2.50 2D Radiation Patterns (LTE\_MIMO2 with 1M cable length on metal)

## XY Plane

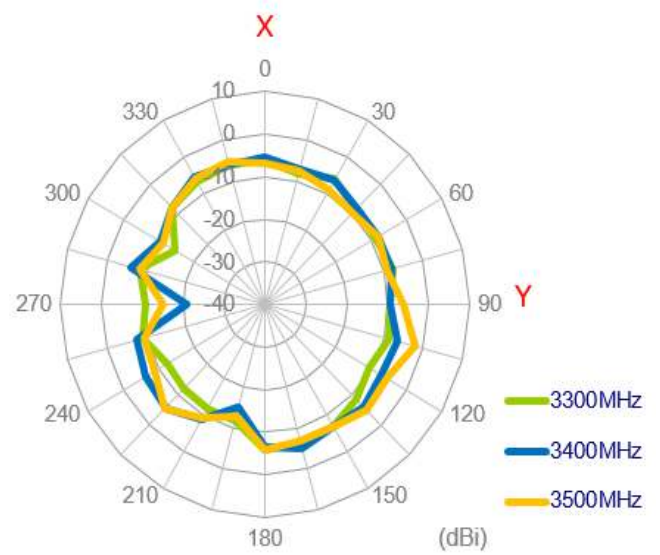
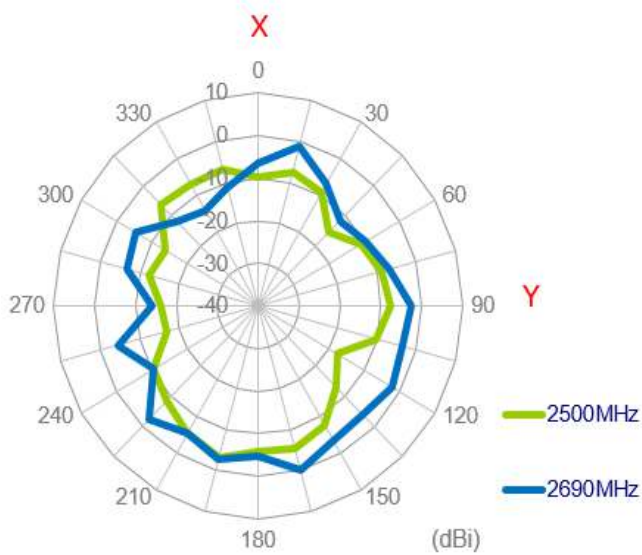
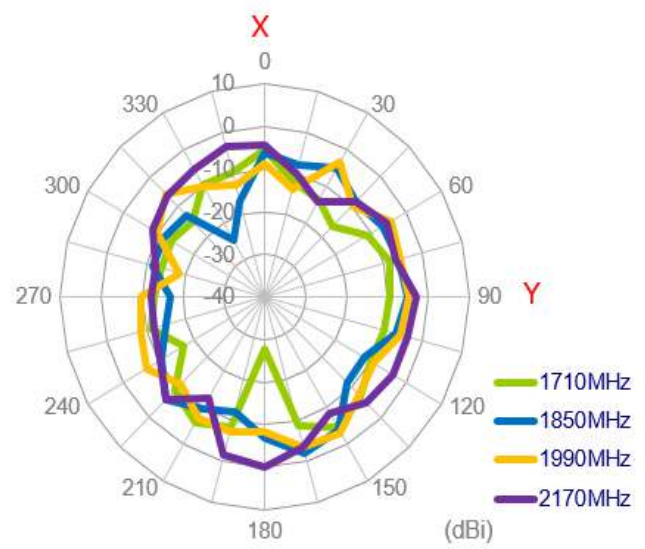
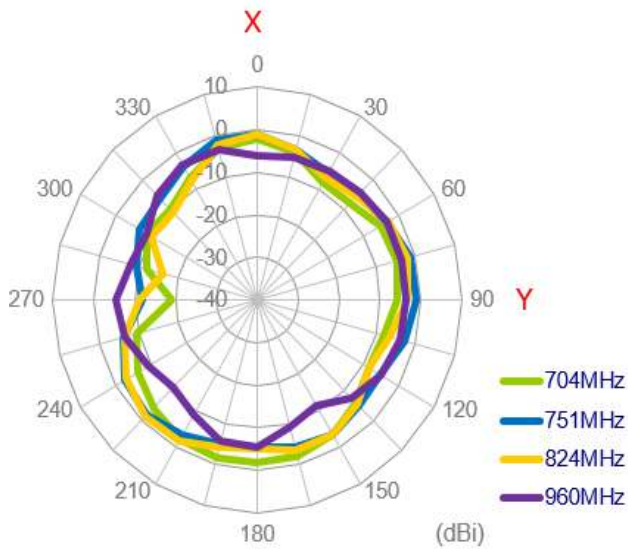





# XZ Plane

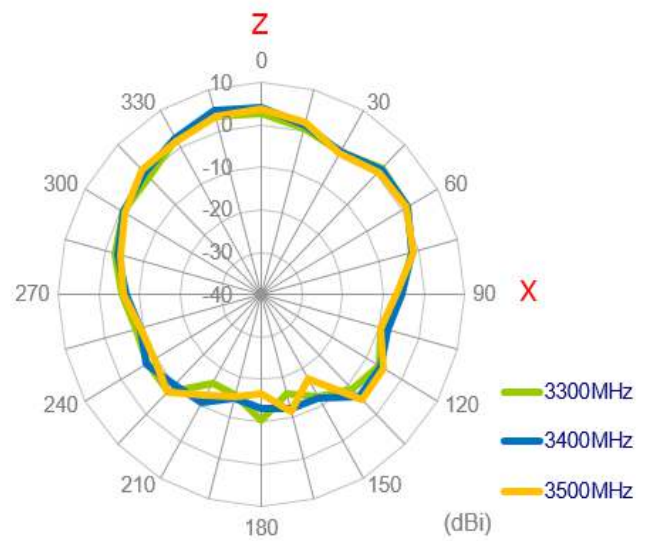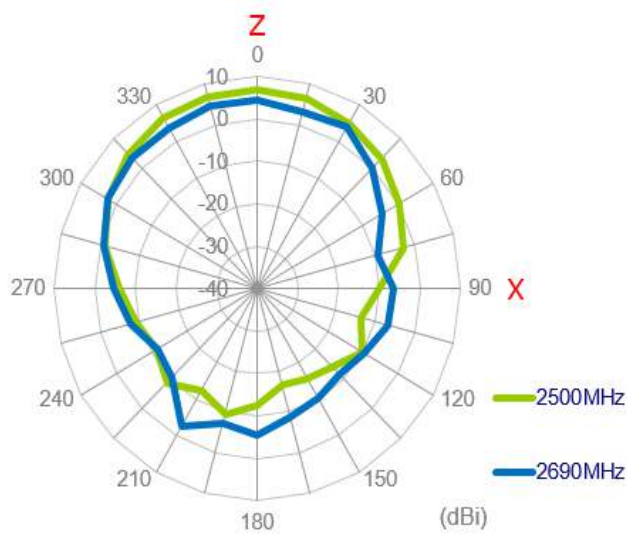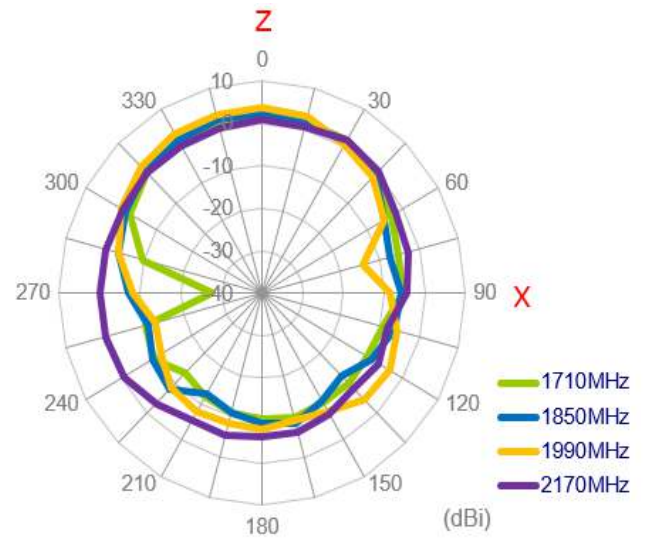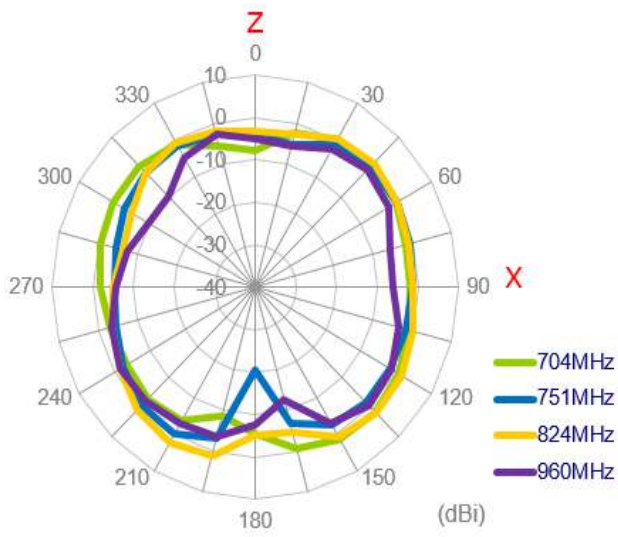


YZ Plane

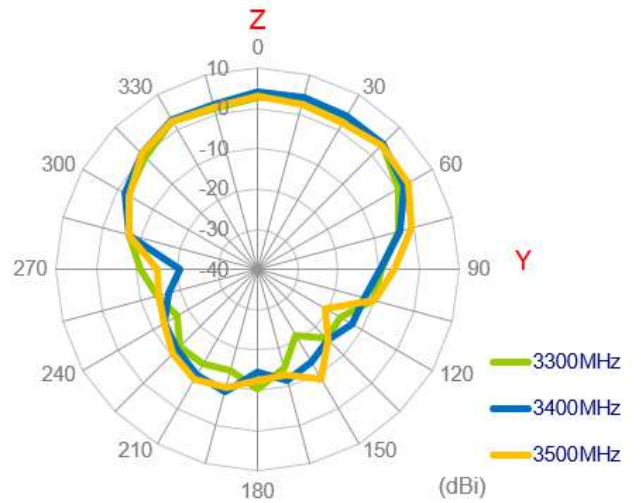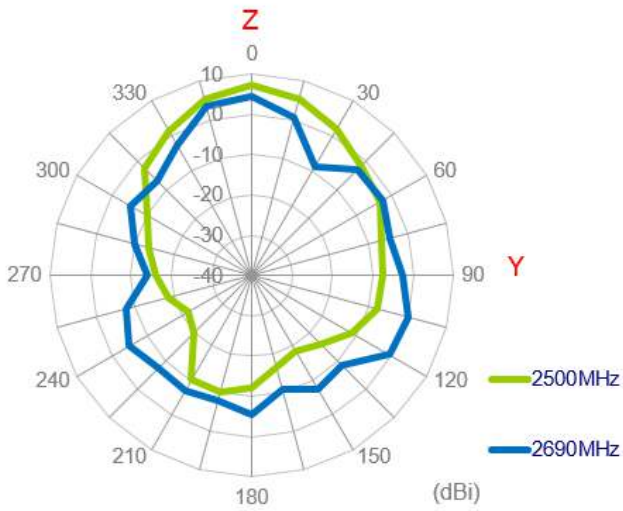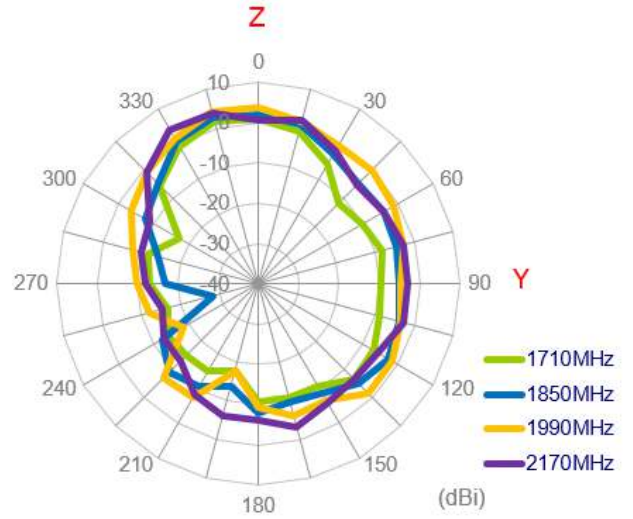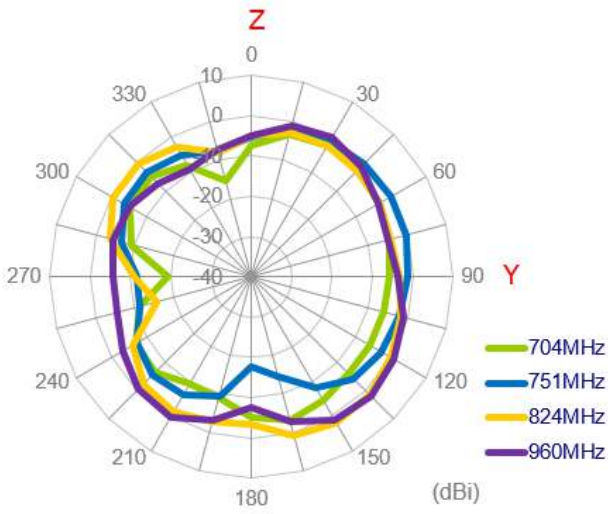


### 3.2.51 3D Radiation Patterns (LTE\_MIMO2 with 1M cable length on metal)

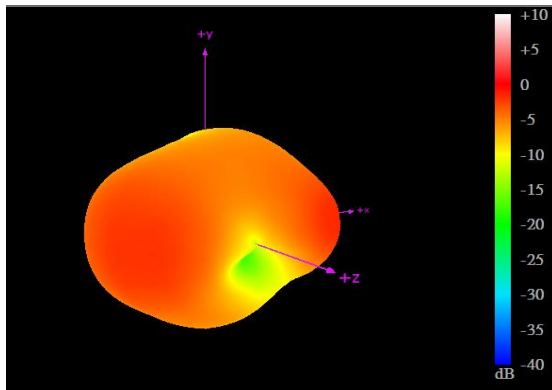


704MHz

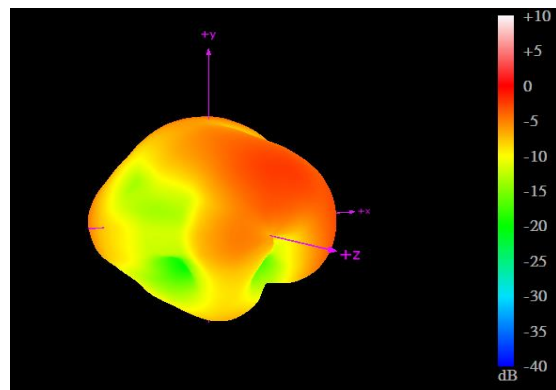


960MHz

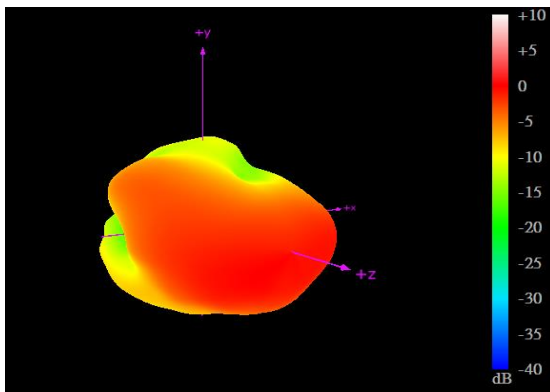


1710MHz

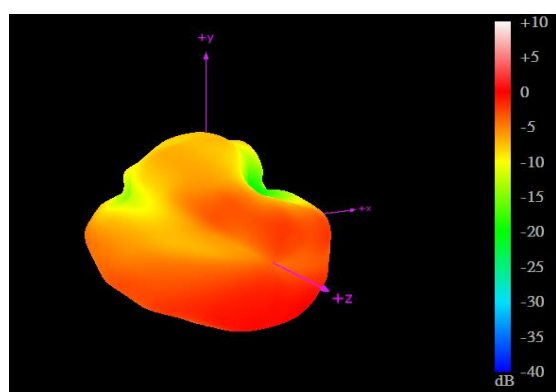

2170MHz

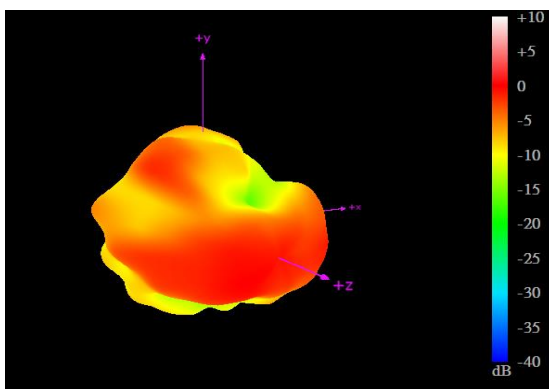



2690MHz

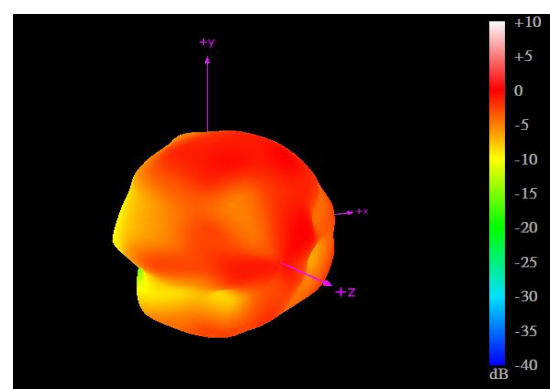



3500MHz

### 3.2.52 2D Radiation Patterns (LTE\_MIMO2 with 1M cable length on metal)



XY Plane

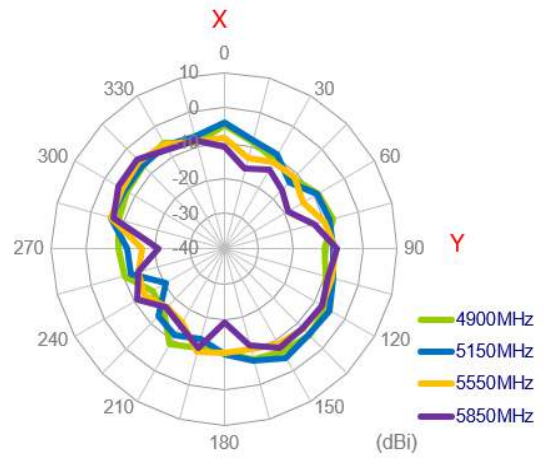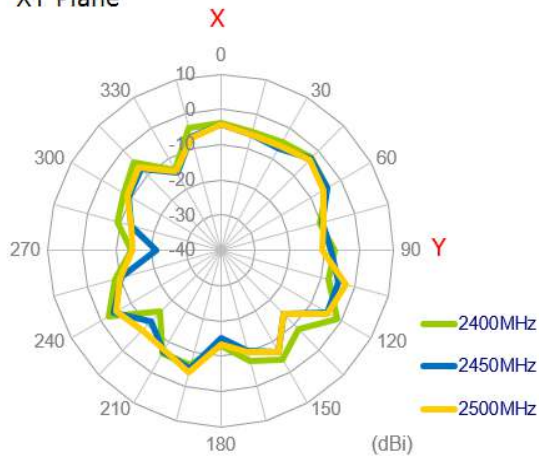


XZ Plane

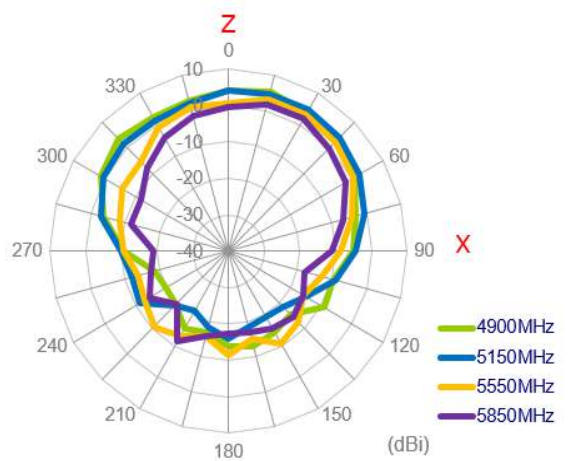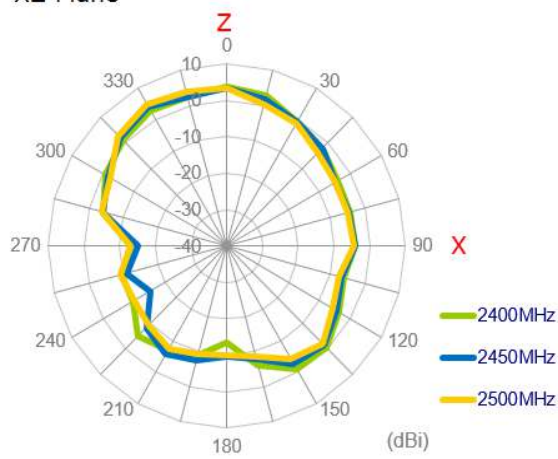


YZ Plane

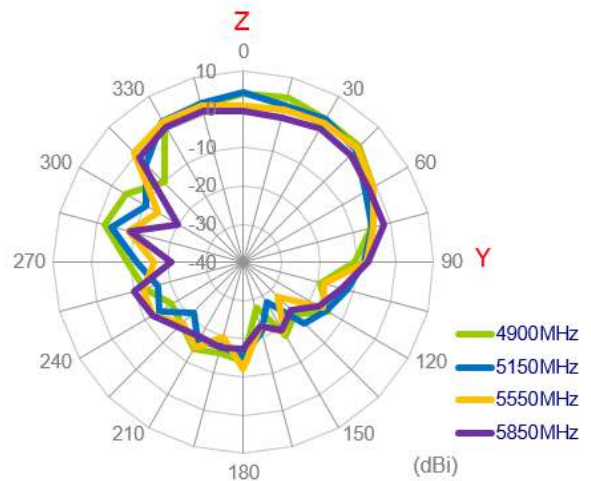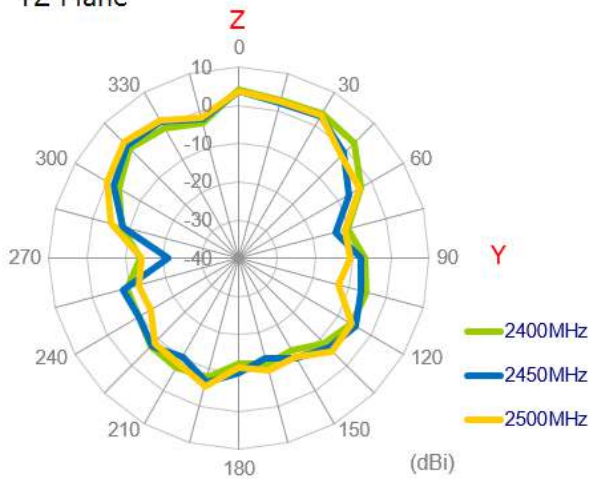

3.2.53 3D Radiation Patterns Pattern (Wi-Fi\_MIMO1 with 1M cable length on metal)

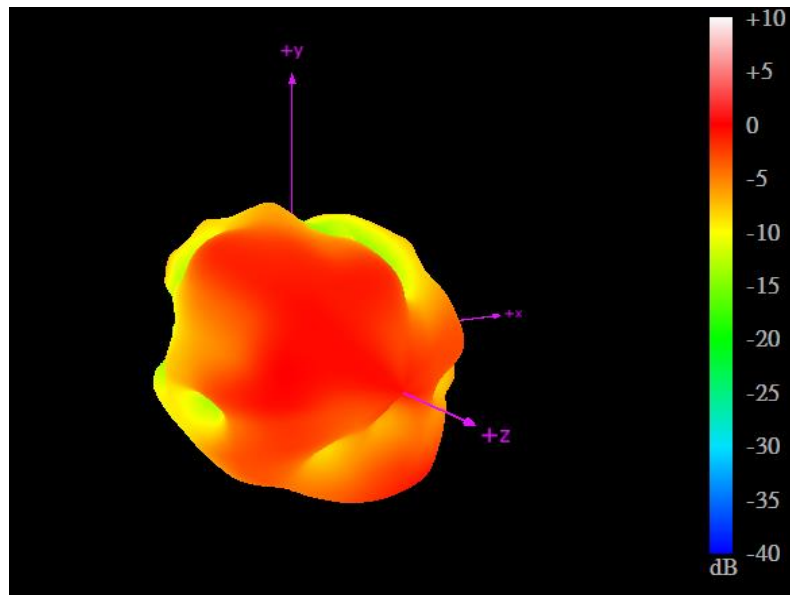

2450MHz


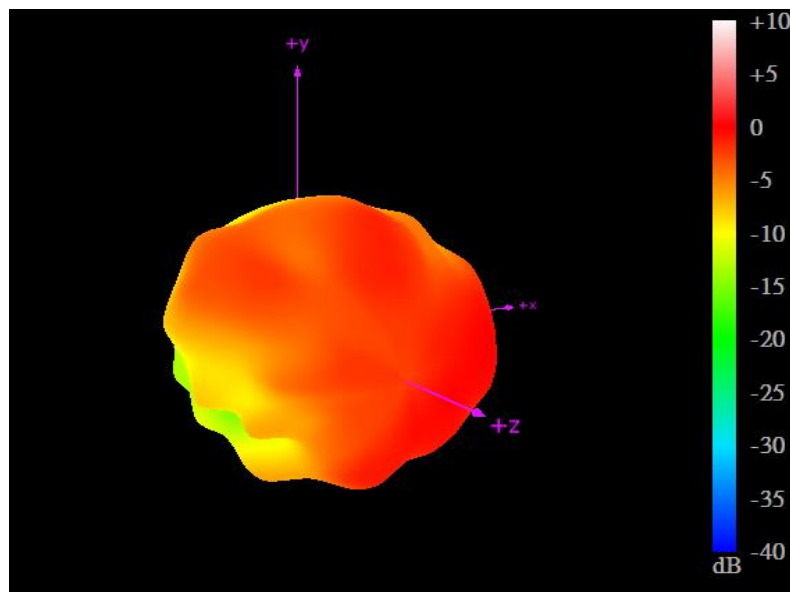


5550MHz





### 3.2.54 2D Radiation Patterns (LTE\_MIMO2 with 3M cable length on metal)



XY Plane

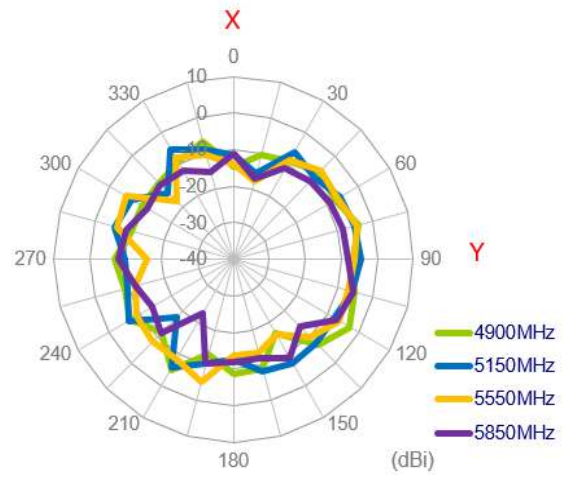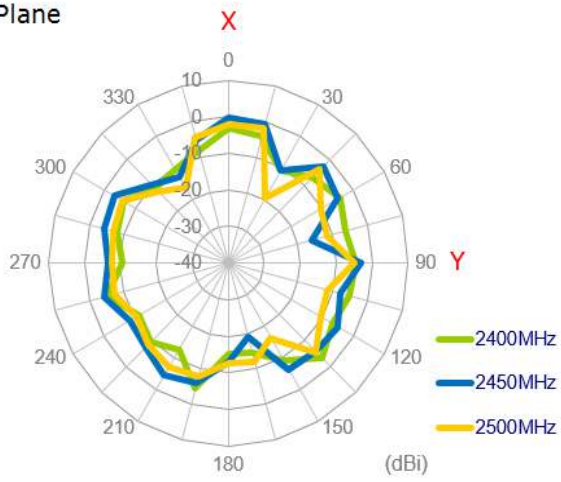

XZ Plane

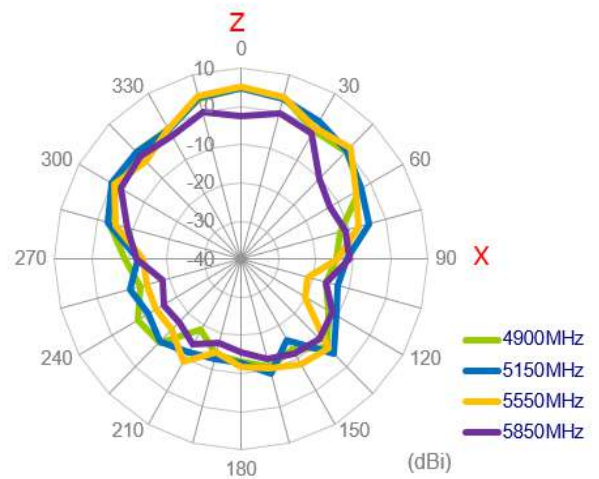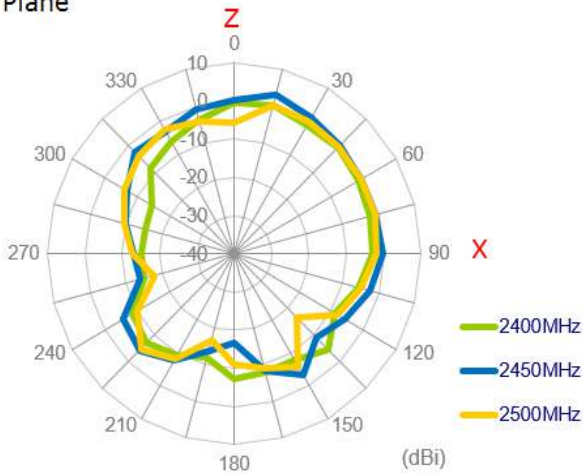


XZ Plane

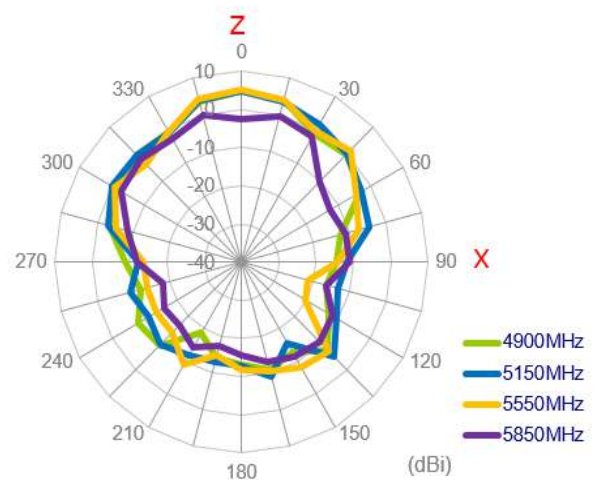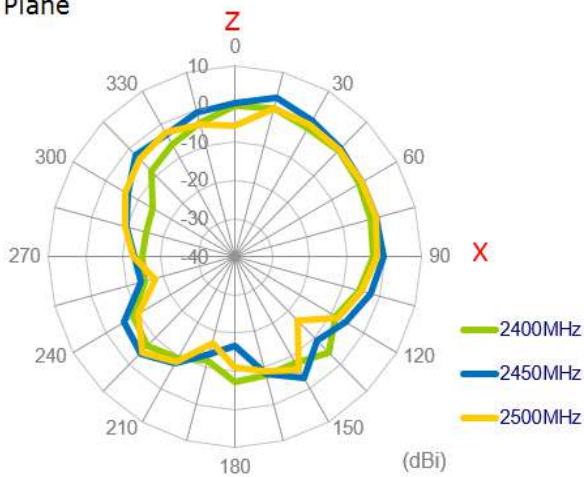




3.2.55 3D Radiation Patterns Pattern (Wi-Fi\_MIMO2 with 1M cable length on metal)

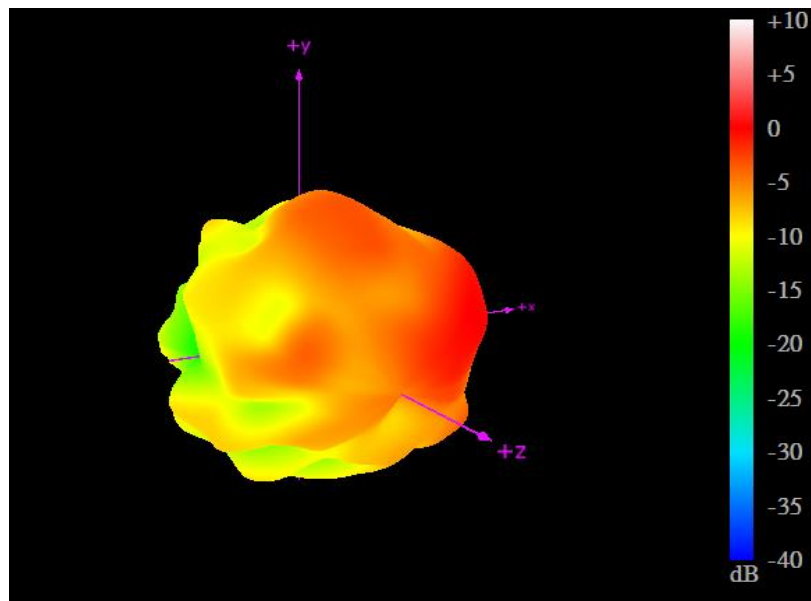


2450MHz

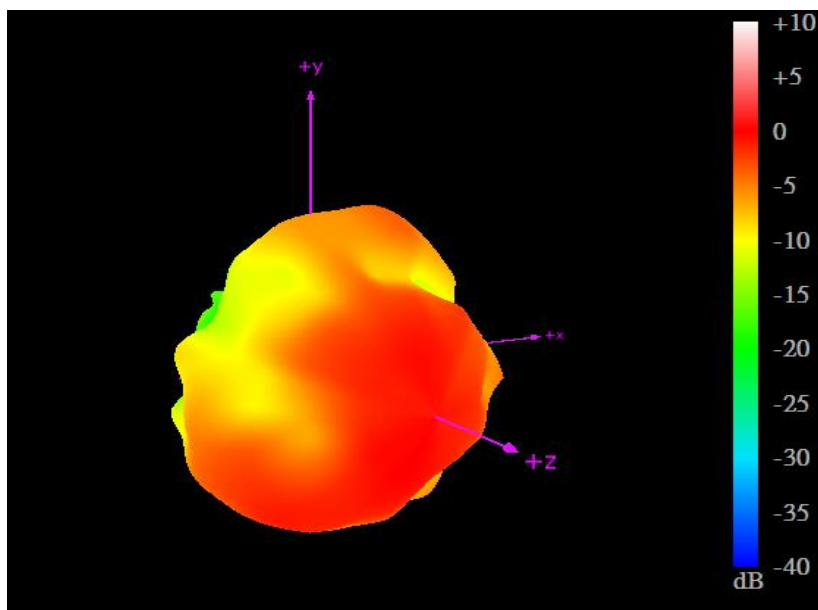

5550MHz





3.2.56 Test Setup for Antenna Radiation Pattern

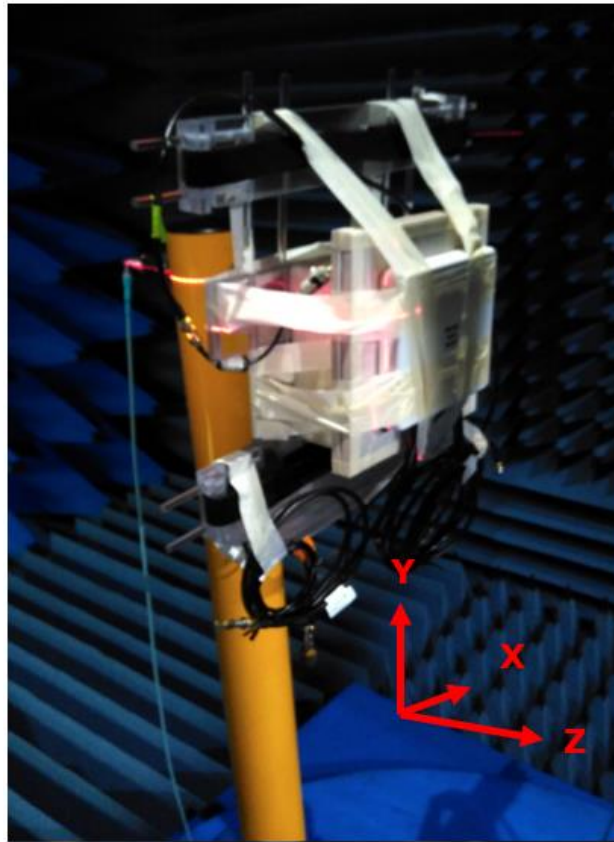





On the wall

3.2.57 2D Radiation Patterns (LTE\_MIMO1 with 1M cable length on the wall)





XY Plane

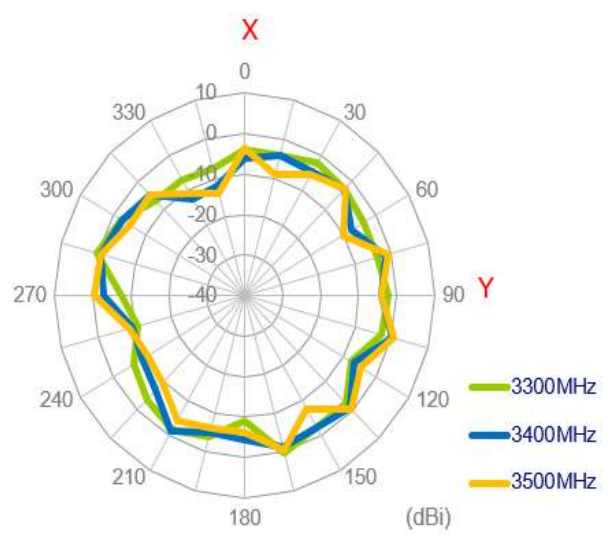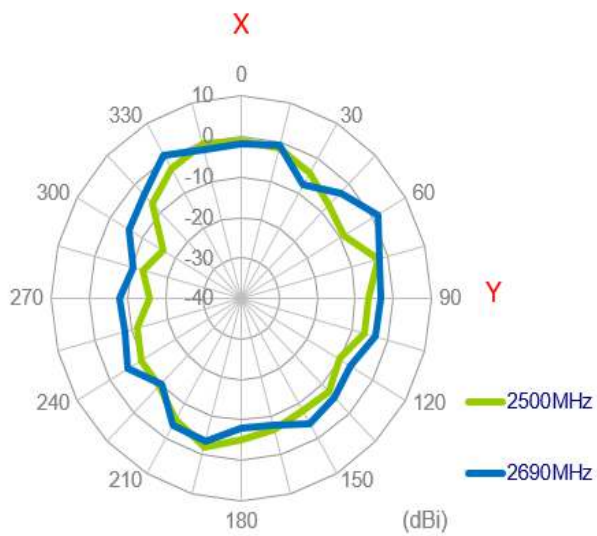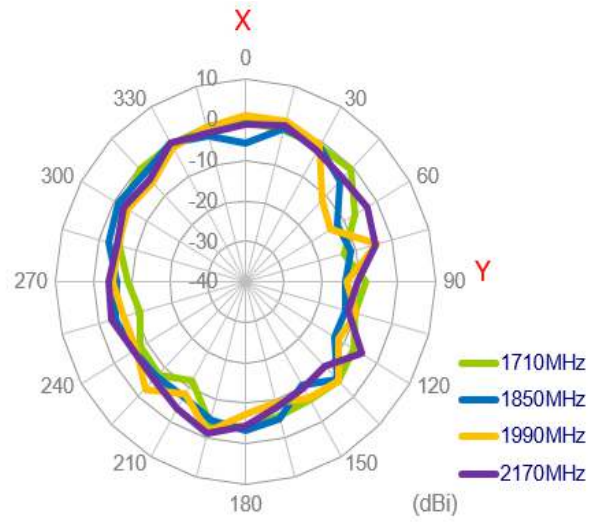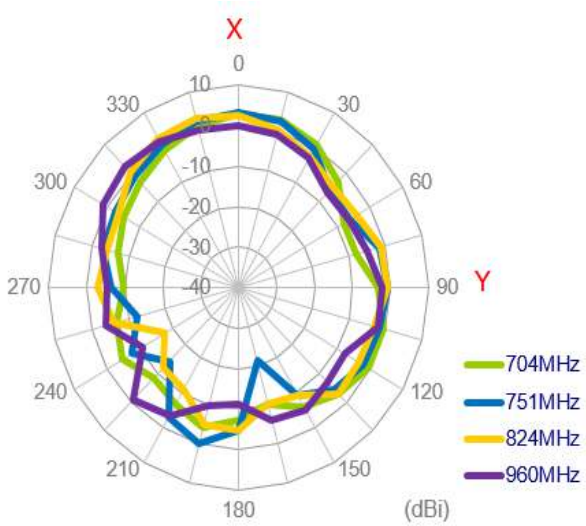

XZ Plane

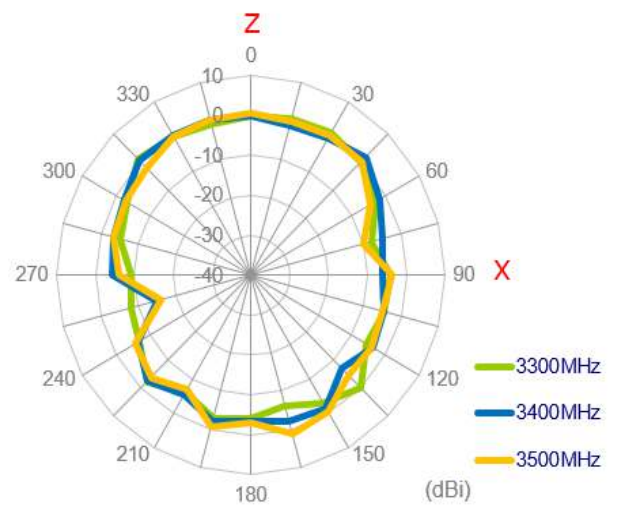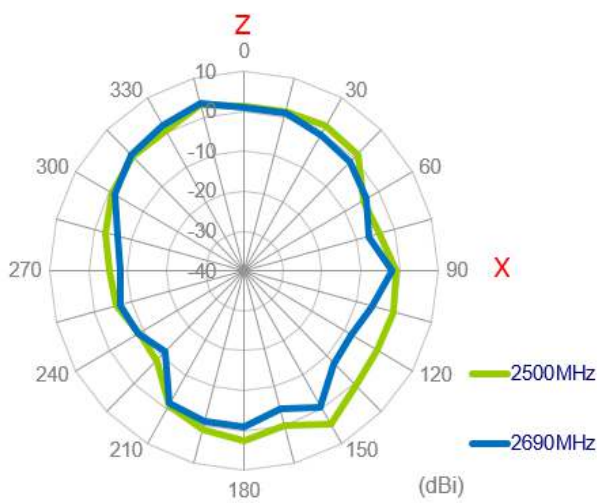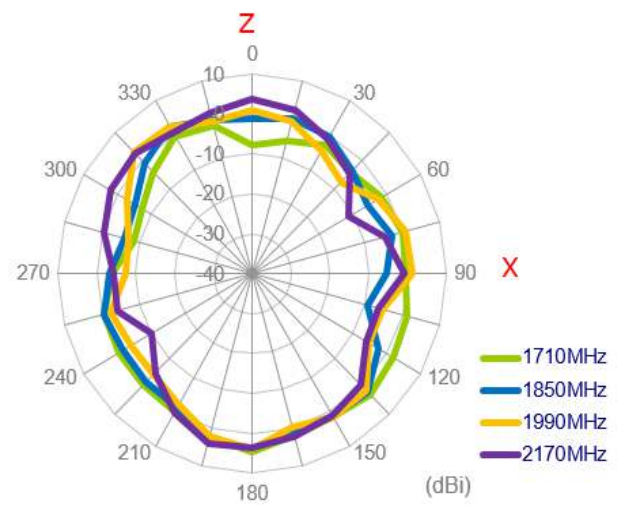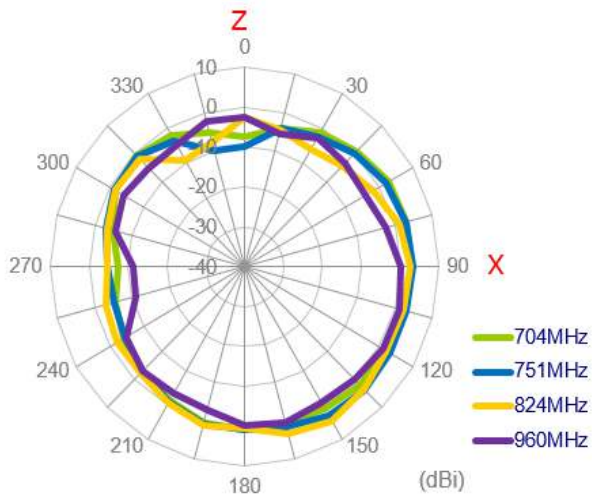


YZ Plane

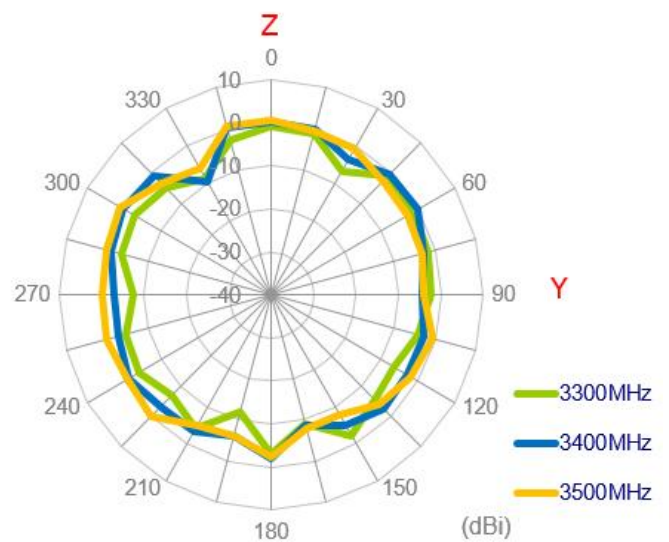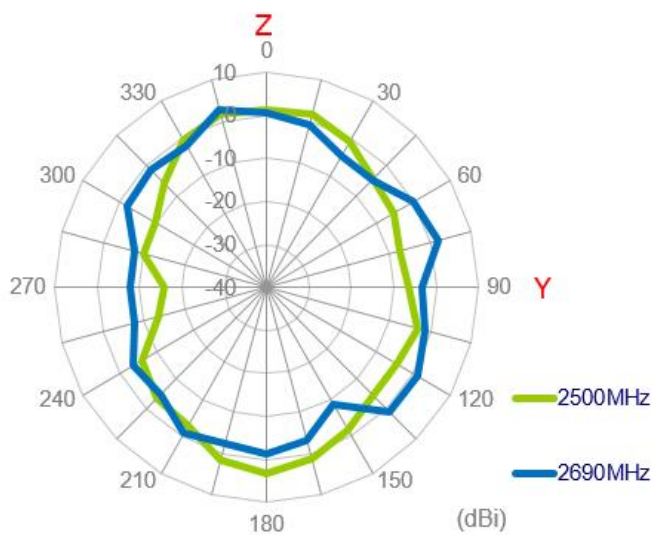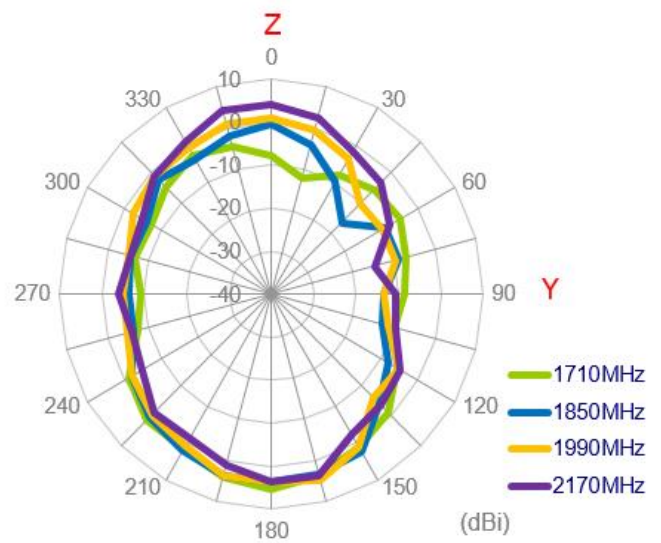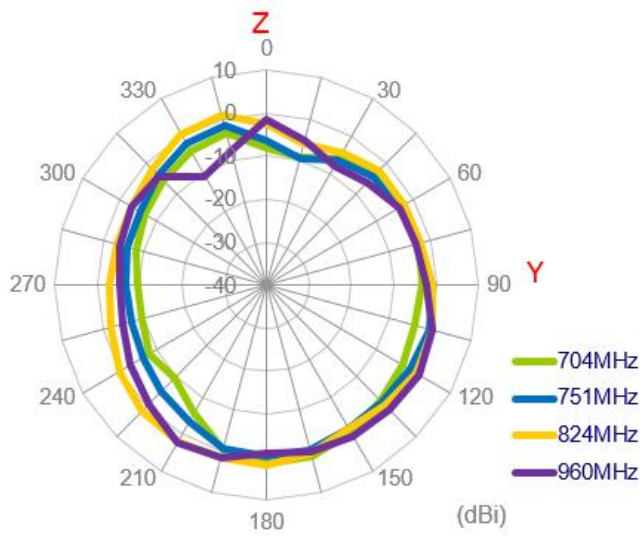





### 3.2.58 3D Radiation Patterns (LTE\_MIMO1 with 1M cable length on the wall)

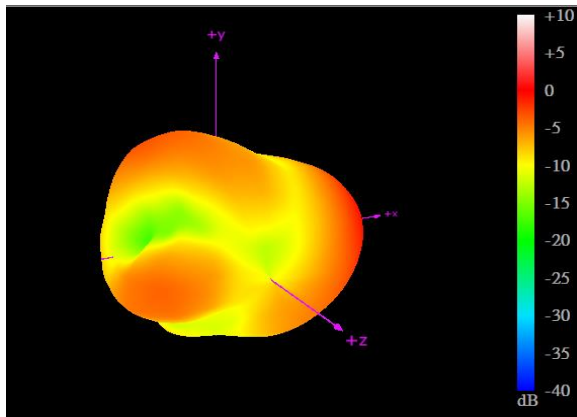


704MHz

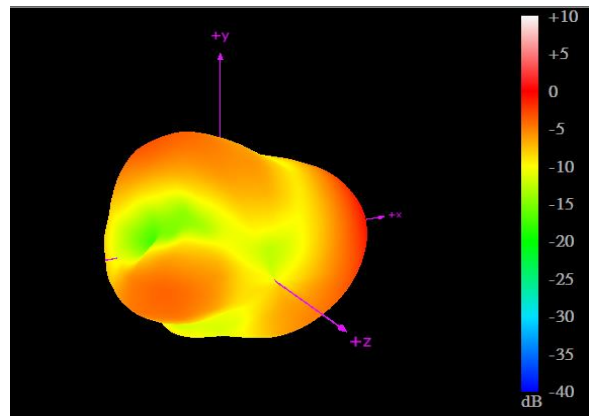


960MHz

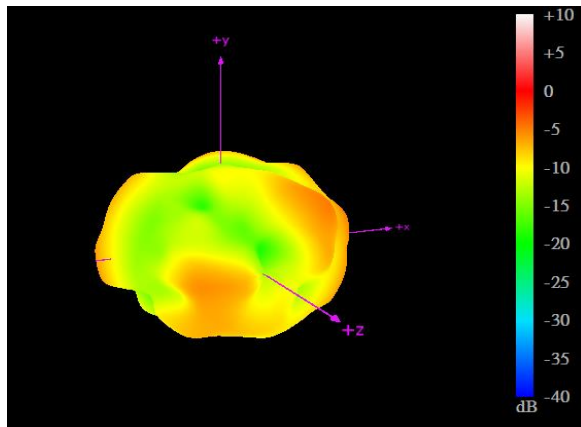


1710MHz

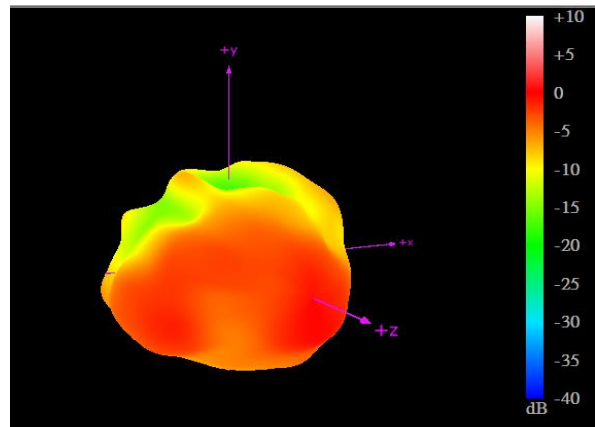

2170MHz

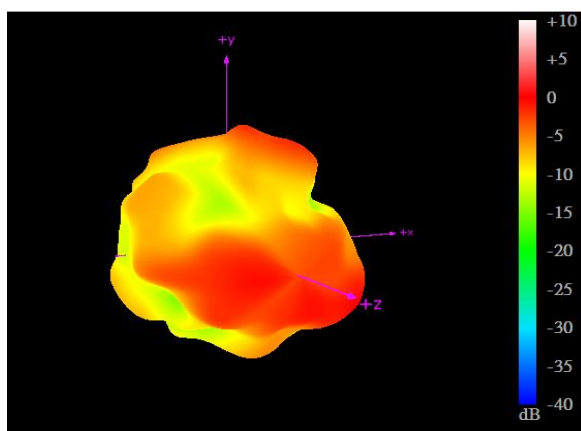

2690MHz




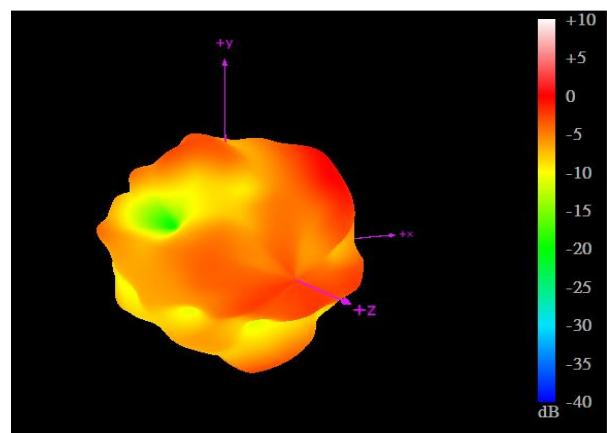


3500MHz







3.2.59 2D Radiation Patterns (LTE\_MIMO1 with 1M cable length on the wall)





XY Plane

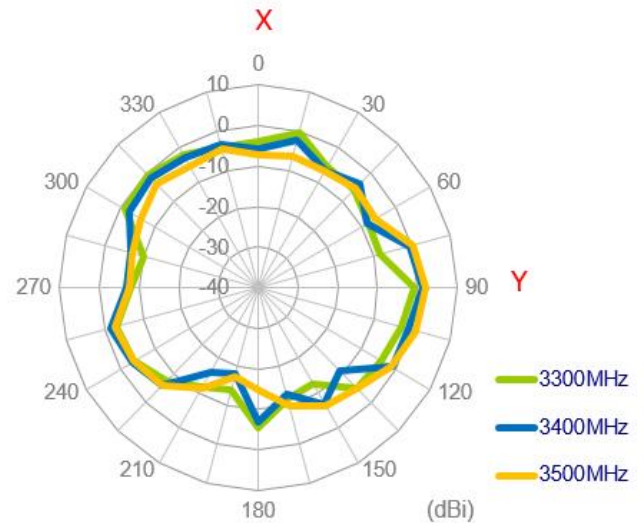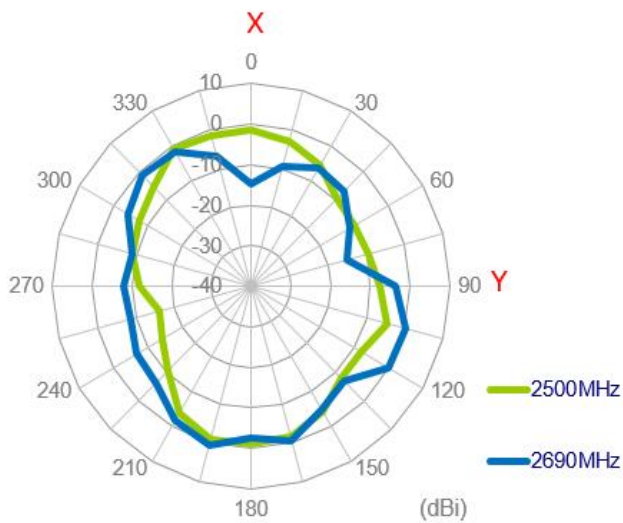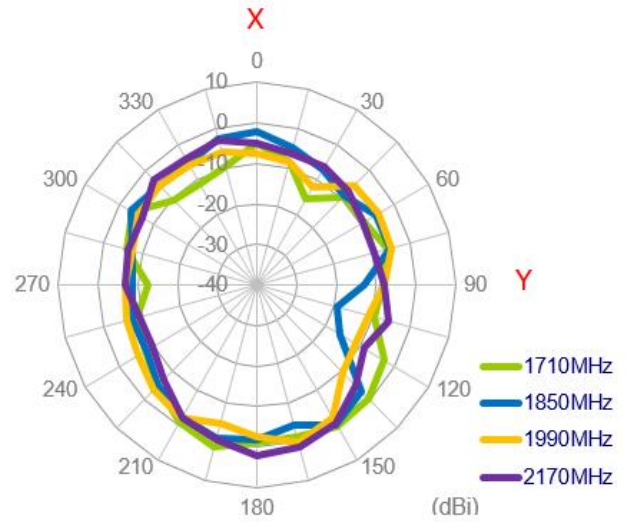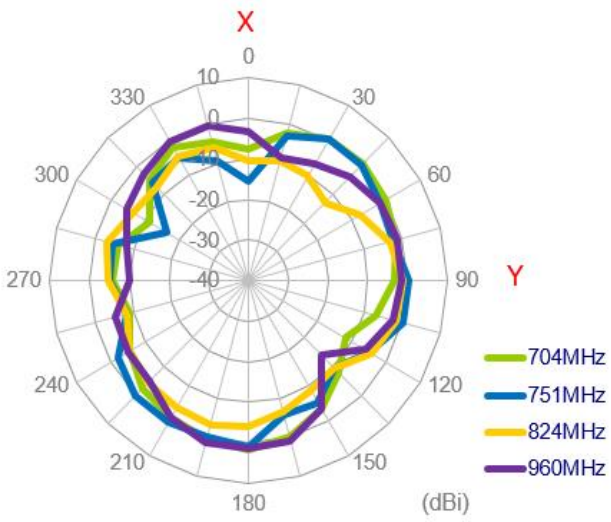


XZ Plane

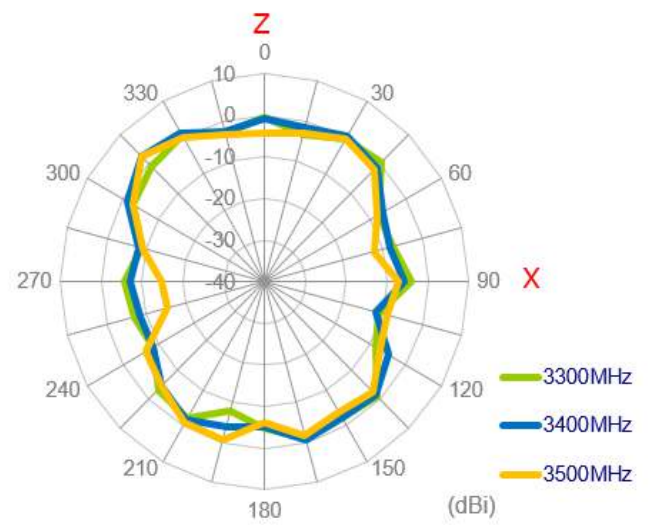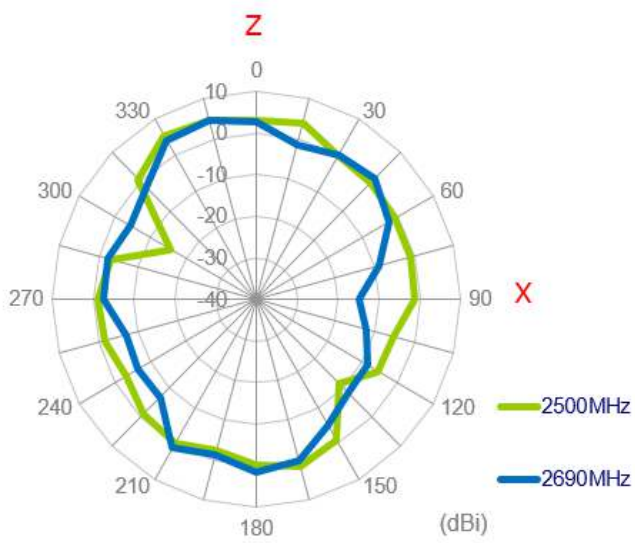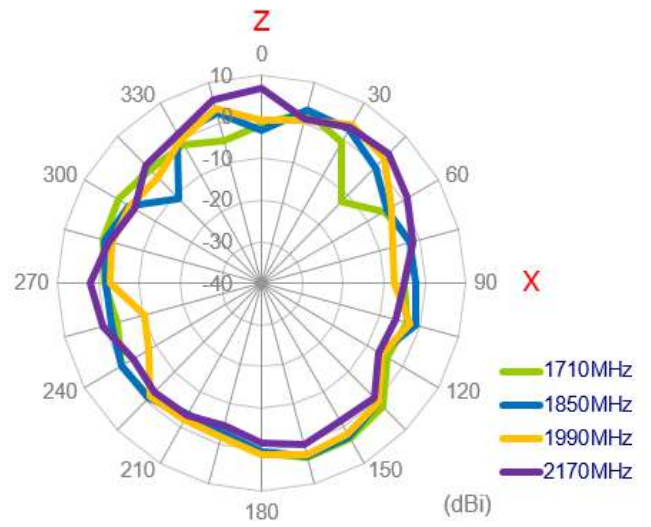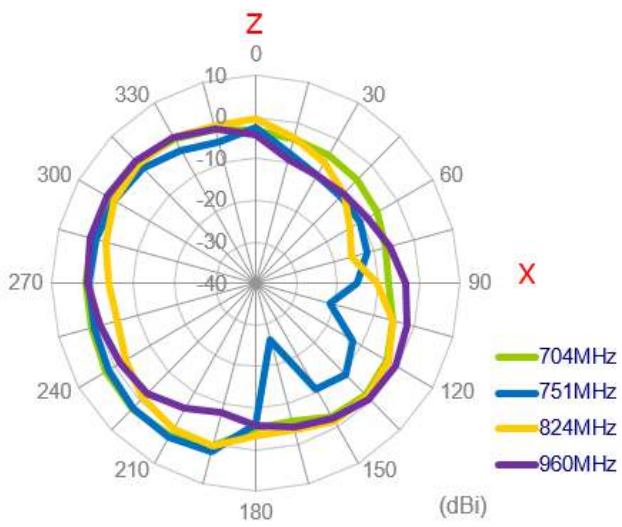


YZ Plane

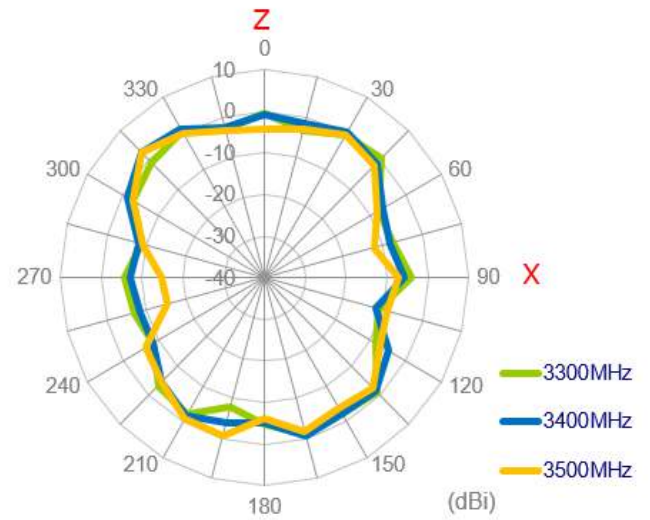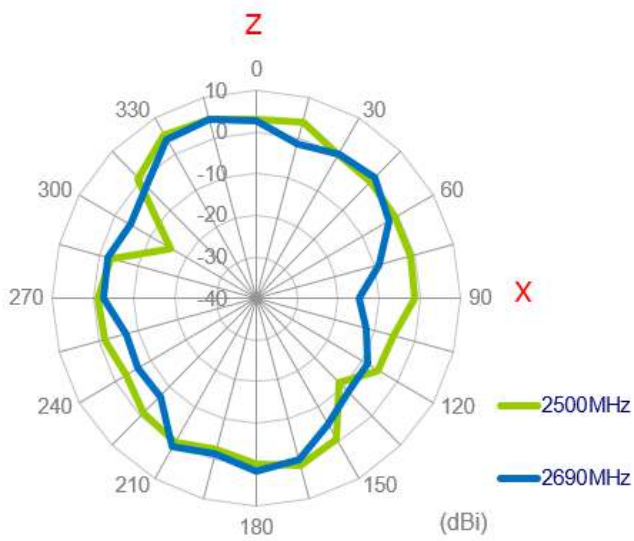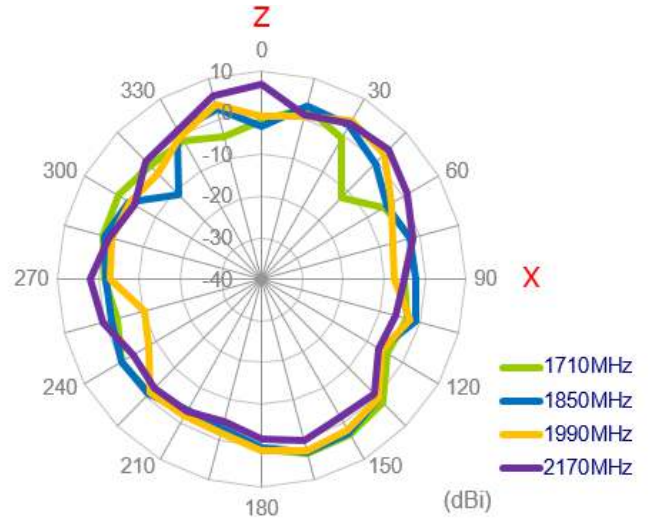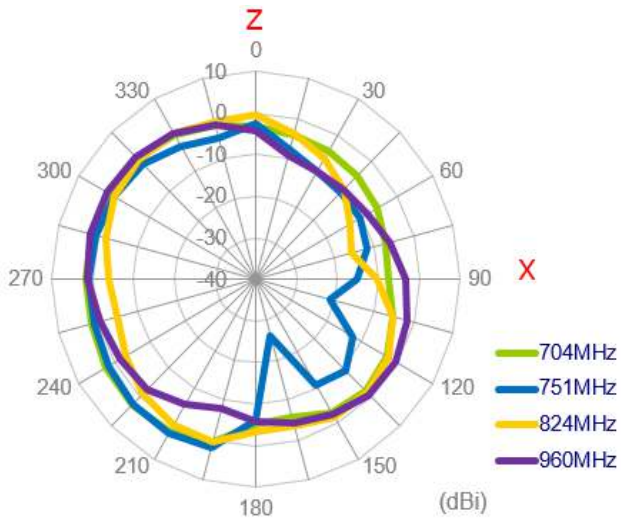


**3.2.60** 3D Radiation Patterns (LTE\_MIMO1 with 1M cable length on the wall)

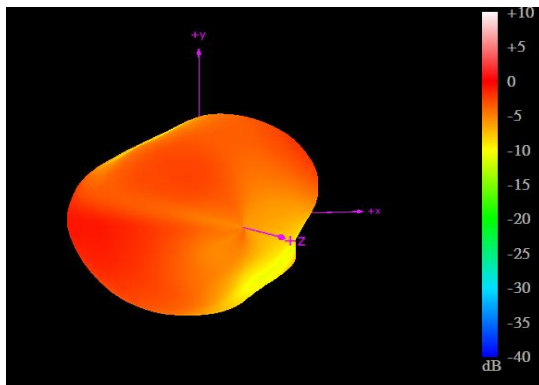


704MHz

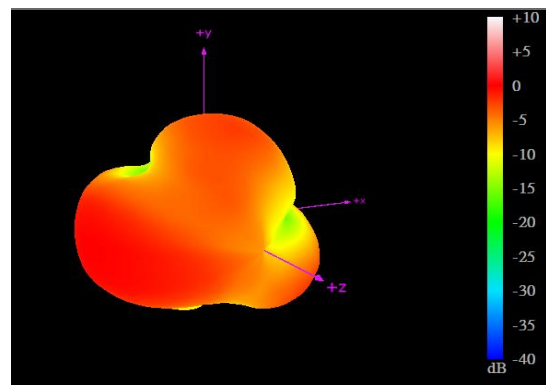


960MHz

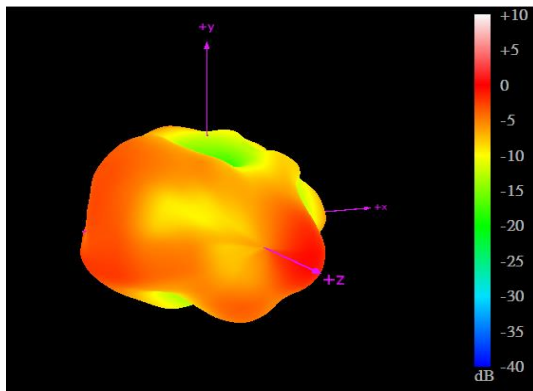


1710MHz

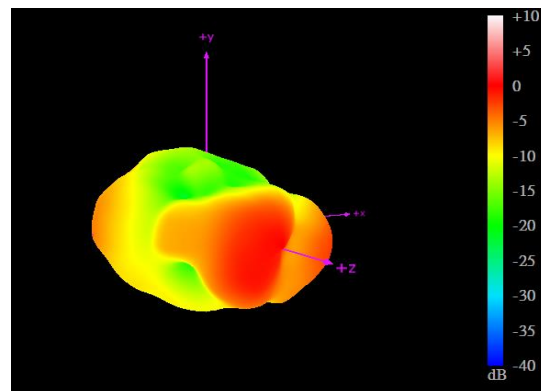

2170MHz

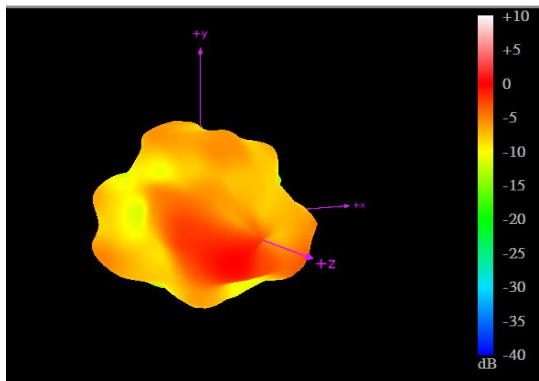

2690MHz


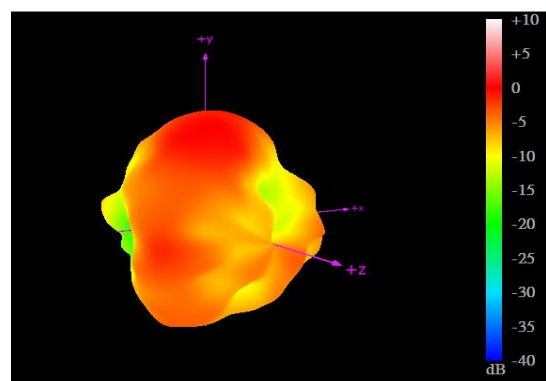


3500MHz





### 3.2.61 2D Radiation Patterns (Wi-Fi\_MIMO1 with 1M cable length in free space)



XY Plane

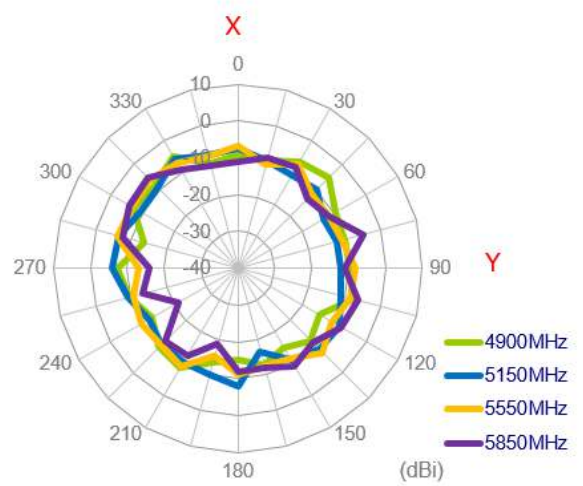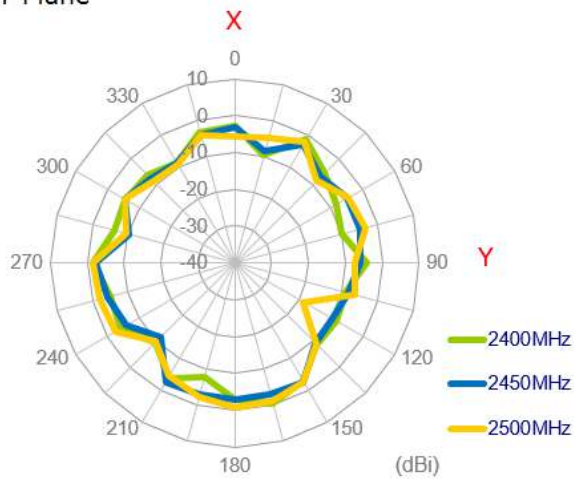


XZ Plane

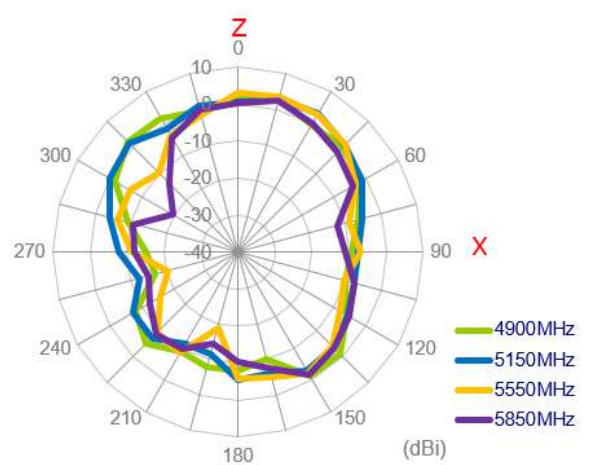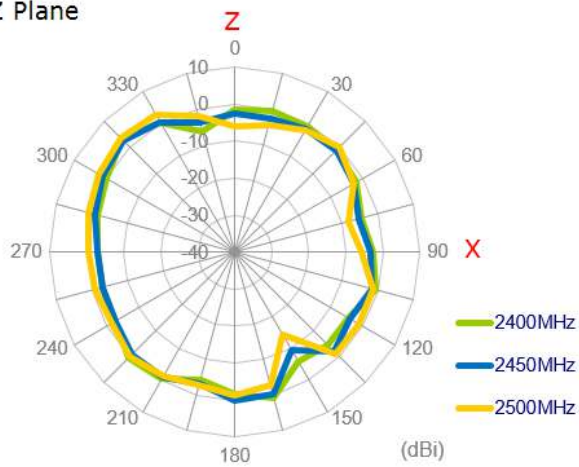


XY Plane

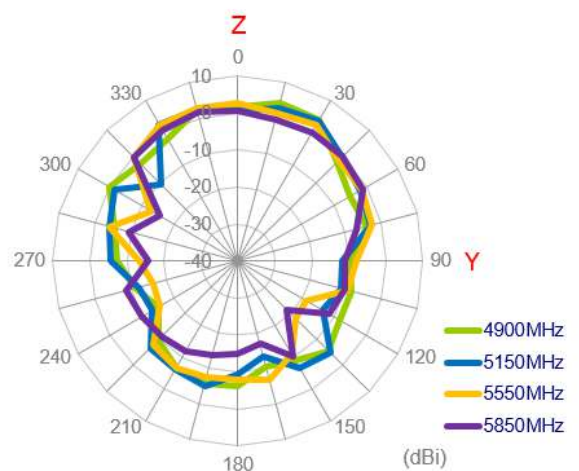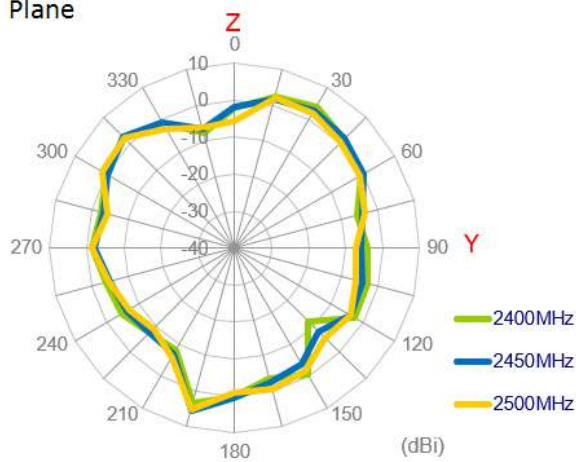

3.2.62 3D Radiation Patterns Pattern (Wi-Fi\_MIMO1 with 1M cable length in free space)

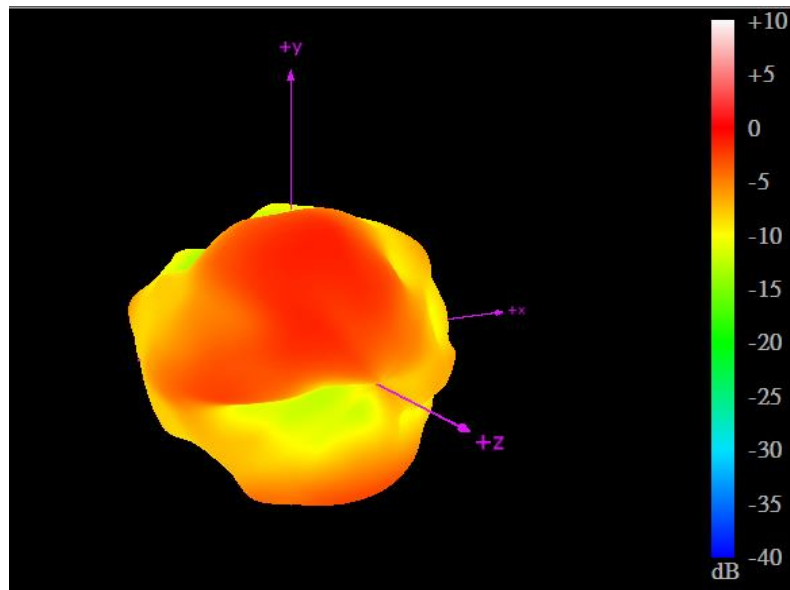

2450MHz


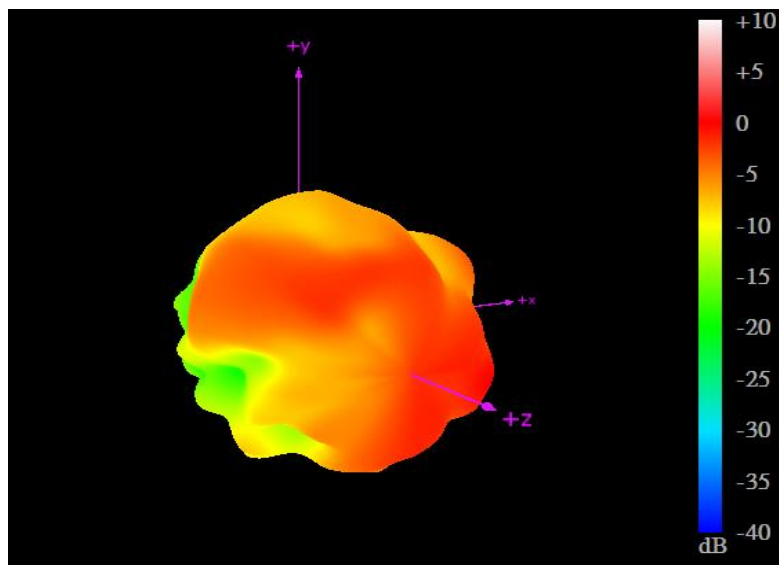


5550MHz





3.2.63 2D Radiation Patterns (Wi-Fi\_MIMO2 with 3M cable length in free space)



XY Plane

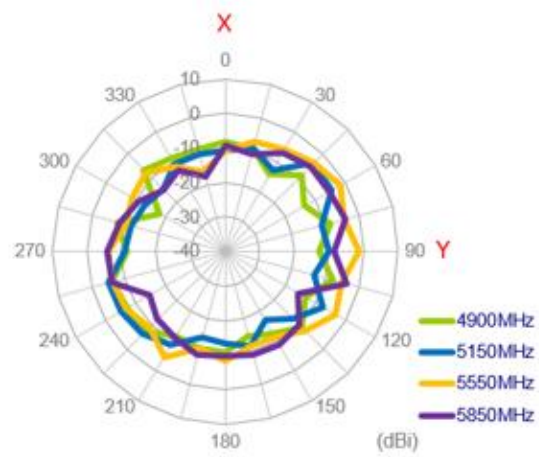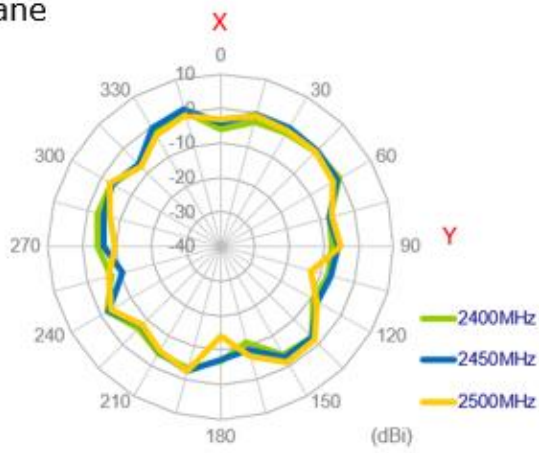


XZ Plane

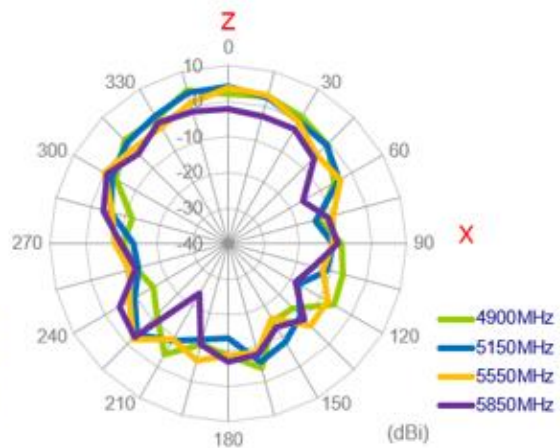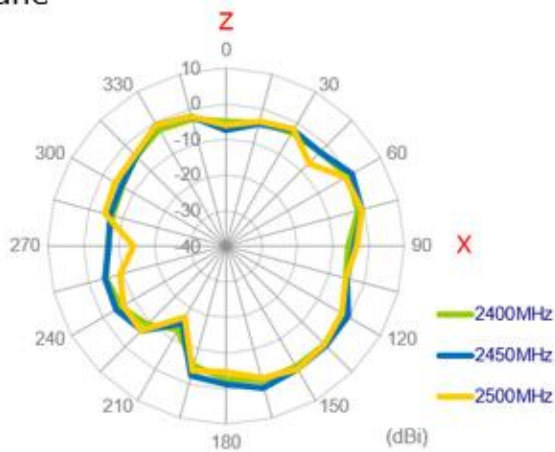


YZ Plane

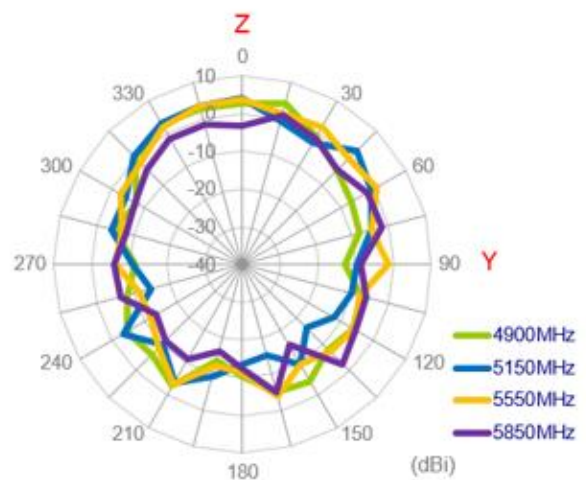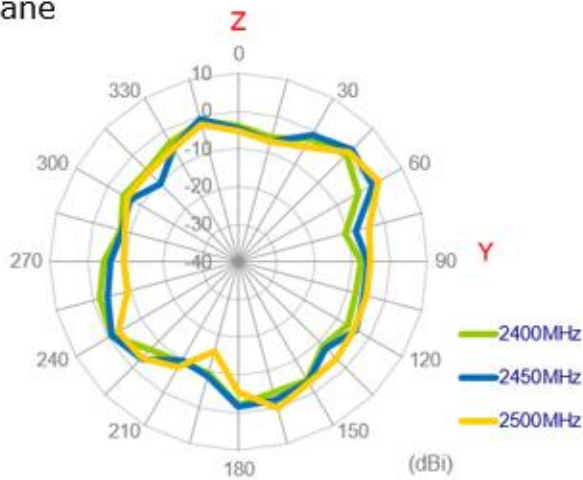

3.2.64 3D Radiation Patterns Pattern (Wi-Fi\_MIMO2 with 1M cable length in free space)

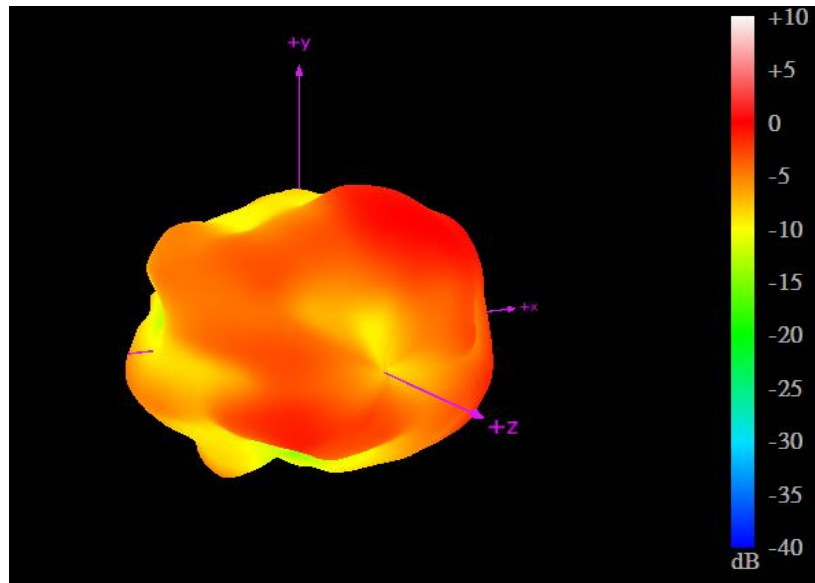

2450MHz

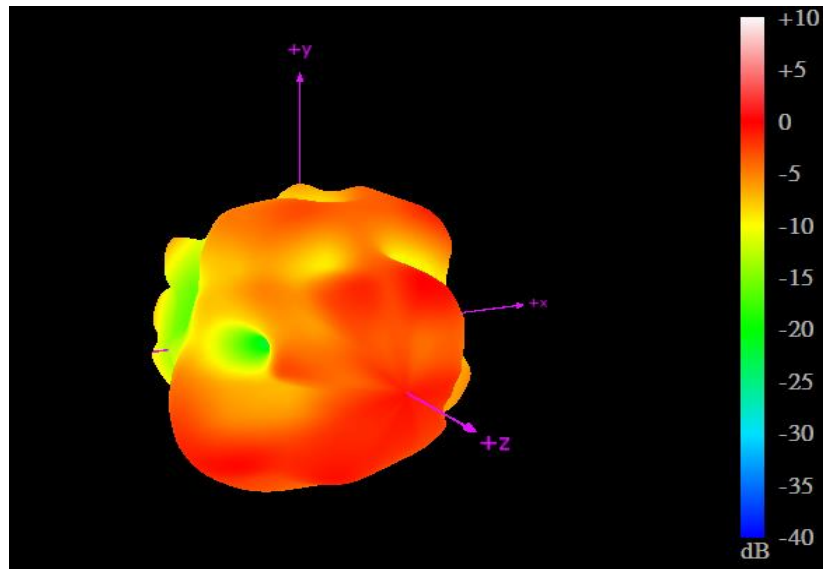

5550MHz

# 4. Mechanical Drawing (Units: mm)

6	5	4	3	2	1
ISO NO: EDW-18-8-6229	<Release>	REV ZONE	DESCRIPTION	ENG	APPROVED ISSUED DATE
		ALL	Modify the Cable to TGC-200<EC-21-08-004>	Aron Yan	Aaron 2022/08/08

**Front View**

**Side View**

**Back View**

**Bottom View**

**Double sided Adhesive(Black Foam)**

Name	P/N	Material	Finish	QTY
1 Top Housing	000115C020000A	ASA(PW-978B)	White	1
2 Bottom Housing	000115C030000A	ASA(PW-978B)	White	1
3 Rubber-3 Holes	000715G000000A	Silicone Rubber	Black	1
4 Clear Label	001015H030000A	PET	Transparent	1
5 Heat Shrink Tube (GNSS)	001316C000000A	PE	Blue Tube/White Text	1
6 Heat Shrink Tube (LTE-1)	001317C020000A	PE	Red Tube/White Text	1
7 Heat Shrink Tube (LTE-2)	001317C030000A	PE	Red Tube/White Text	1
8 Heat Shrink Tube (Wi-Fi-1)	001316L060000A	PE	Yellow Tube/Black Text	1
9 Heat Shrink Tube (Wi-Fi-2)	001316L070000A	PE	Yellow Tube/Black Text	1
10 Heat Shrink Tube (Wi-Fi-3)	001316L090000A	PE	Yellow Tube/Black Text	1
11 Empty Label	001015G000000A	PEPA	White	1
12 Barcode Label	001015G010000A	PET	White	1
13 Double Sided Adhesive(Black Foam)	001019C010000A	GNSS-3040W 35H	White Liner	1
14 RG174 Coaxial Cable	301315C000000A	PVC	Black	1
15 TGC-200 Cable	306718E000000A	PE	Black	5
16 SMA(M)ST (For RG174)	200216B000050A	Brass	Au Plated	1
17 SMA(M)ST	200220C000010A	Brass	Au Plated	2
18 RP-SMA(M)ST	200220K000010A	Brass	Au Plated	3
19 Rubber-3 Holes	000717B050000A	Silicone Rubber	Black	1


**NOTES:**  
 1. All material must be RoHS compliant.  
 2. The connector orientation has a fixed position to the antenna as per drawing.  
 3. Part No.: MA931.W.A.L301111.B30PP111.130PP111.C30PP151.G30PP151.H30PP151.  
 4. Double Sided Adhesive Area:

A	UNLESS OTHERWISE SPECIFIED TOLERANCES ON:	DATE: 2017/02/16	MAT'L:	REV D04
	.X± 0.2	UNIT: mm	FINISH:	
	XX± 0.5 .XX± 0.1	THIRD ANGLE PROJECTION	SCALE: 1/2.5	
	X± 0.3 .XXX± 0.05	APPROVED BY: Paul	CHECKED BY: Jack/Haley	


TW Design Centre  
 This drawing and its inherent design concepts are property of Taoglas. Not to be copied or given to third parties without the written consent of Taoglas.

TITLE : White 6in1 Adhesive 3000mm:GNSS-RG174 SMA(M);  
 LTE(1&2) TGC-200 SMA(M);WiF(1&2&3)TGC-200 RP-SMA(M)  
 PART NO. : MA931.W.A.LBICGH.001


# 5. Packaging

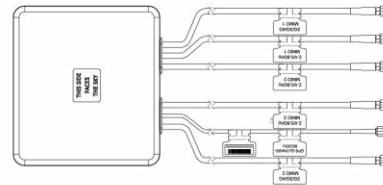


1 No. MA931.W.A.LBICGH.001 per small box  
 Box Dimensions - 260 x 235 x 105mm  
 Weight - 1.16Kg

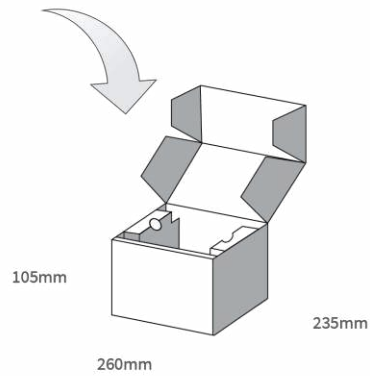

1 Outer Carton  
 Carton Dimensions - 540 x 490 x 240mm  
 8 pcs MA931.W.A.LBICGH.001 per carton  
 Weight - 9.9Kg

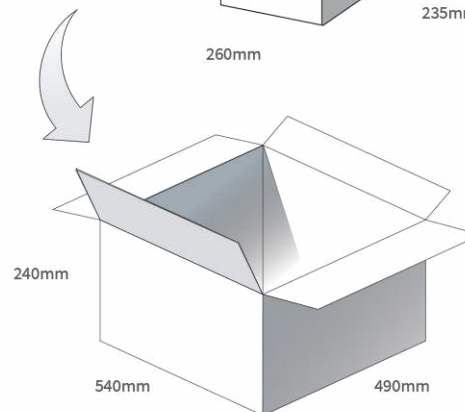

Pallet Dimensions 1200\*1000\*1400mm  
 20 Cartons per Pallet  
 4 Cartons per layer  
 5 Layers

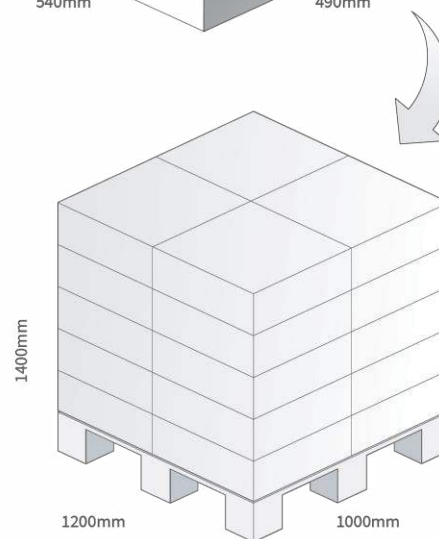

Changelog for the datasheet

**SPE-17-8-045 – MA931.W.A.LBICGH.001**

**Revision: D (Current Versions)**

Date:	2022-07-04
Notes:	Updated Drawing
Author:	Cesar Sousa

**Previous Revisions**

**Revision: C**

Date:	2019-11-20
Notes:	Updated Drawing
Author:	Yu Kai Yeung

**Revision: B**

Date:	2019-10-09
Notes:	Updated specifications
Author:	Jack Conroy

**Revision: A (Original First Release)**

Date:	2017-08-14
Notes:	Initial Datasheet Release
Author:	Author





**TAOGLAS®**

[www.taoglas.com](http://www.taoglas.com)

