



UNIT:mm

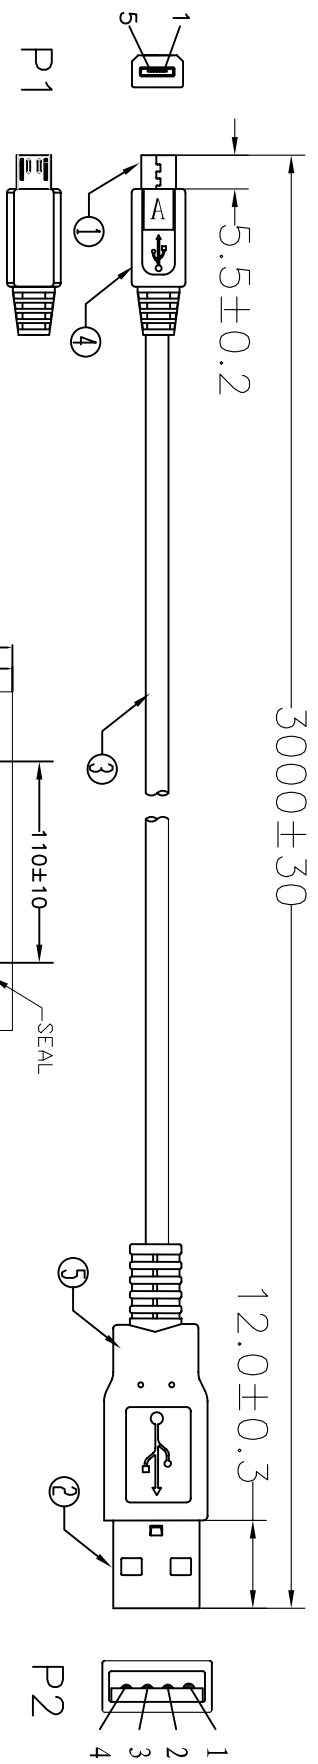

PIN ASSIGNMENT

P1	RED	1	P2	WHITE	1
	WHITE	2		GREEN	2
	GREEN	3		BLACK	3
	BLACK	4		DRAIN+BRAID	4
				SHELL	

Electrical test:
 1. 100% short, open, miswire test
 2. Conduct resistance: 2 Ohm(max)
 3. Insulation resistance: 10Mohm(min)
 4. dielectric test: DC 300V

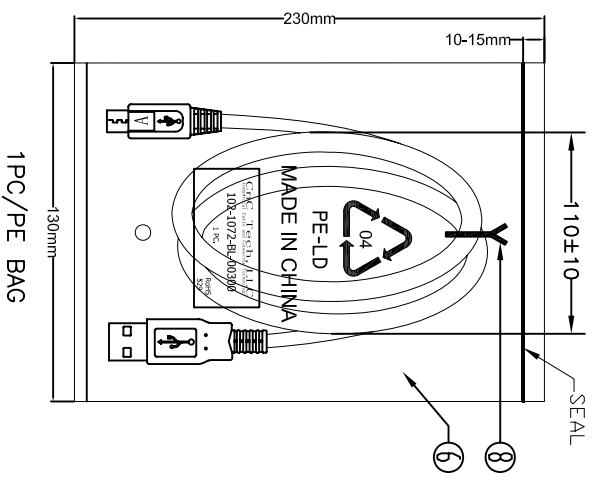

⑧	TIE	1	BLACK L=80mm
⑦	PE BAG	1/10	CLEAR SIZE: 280*330*0.05mm PRINT BLACK"MADE IN CHINA"+"10PCS"及印生产日期,有透气孔.
⑥	PE BAG	1	CLEAR SIZE: 130*230*0.05mm PRINT BLACK"MADE IN CHINA"+"1PC"及印生产日期,有透气孔.
⑤	OUT JACKET	6g	BLACK PVC-40P (MOULD NO. WM-40)
④	OUT JACKET	6g	BLACK PVC-40P (MOULD NO. WM-173)
③	CABLE	1	USB2.0 UL2725 [28AWG(7/0.12TC+AL)*1P+28AWG(7/0.12TC)*2C]+AEB(48B TC) JACKET:BLACK OD:3.5mm L=3000±10mm
②	CONN	1set	USB A MALE SHELL:NICKEL PIN:G/F 3PCS TYPE INSULATOR COLOR:WHITE
①	CONN	1	MICRO USB 5P A/M SOLDER TYPE SHELL:NICKEL PIN:G/F INSULATOR COLOR:BLACK
NO.	NAME	Q'TY	SPECIFICATION

CNC Tech, LLC
 Industrial Cable and Connector Technology

DRAWN	ZHONGHS	DRAWING NO	
CHECKED		CUSTOMER	
APPROVAL		ITEM NO.	102-1072-BL-00300
DECIDED		DATE	2012-02-16
VERSIONS/EDITION	A/0	PROJECTION	

4

3

2

1

4

3

2

1

D

D

C

C

B

B

A

A