


# High Voltage, Internally Compensated Operational Amplifiers


The MC1436, C was designed for use as a summing amplifier, integrator, or amplifier with operating characteristics as a function of the external feedback components.

- Output Voltage Swing:  $\pm 22 V_{pk(min)}$  ( $V_{CC} = +28 V$ ,  $V_{EE} = -28 V$ )
- Fast Slew Rate:  $2.0 V/\mu s$  Typ
- Internally Compensated
- Offset Voltage Null Capability
- Input Overvoltage Protection
- $A_{VOL}$ : 500,000 Typ
- Characteristics Independent of Power Supply Voltages: ( $\pm 5.0 V_{dc}$  to  $\pm 36 V_{dc}$ )

**Figure 1. Differential Amplifier with  $\pm 20 V$  Common Mode Input Voltage Range**

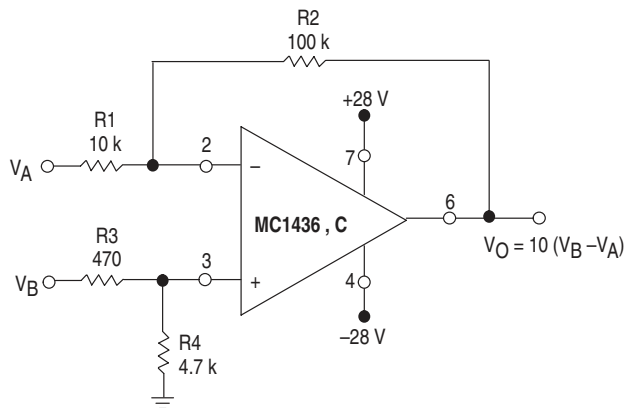


**Figure 2. Typical Noninverting X10 Voltage Amplifier**

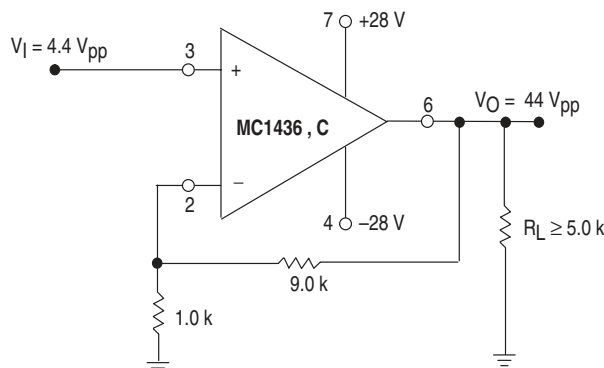

## MC1436, C

### OPERATIONAL AMPLIFIERS

#### SEMICONDUCTOR TECHNICAL DATA




**P1 SUFFIX**  
PLASTIC PACKAGE  
CASE 626



**D SUFFIX**  
PLASTIC PACKAGE  
CASE 751  
(SO-8)

#### PIN CONNECTIONS

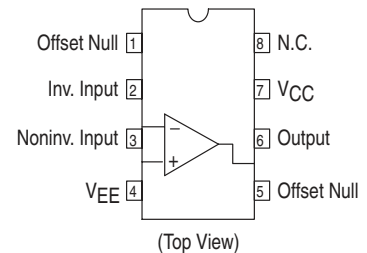

#### ORDERING INFORMATION

| Device       | Operating Temperature Range      | Package     |
|--------------|----------------------------------|-------------|
| MC1436CD,D   | $T_A = 0^\circ$ to $+70^\circ C$ | SO-8        |
| MC1436CP1,P1 |                                  | Plastic DIP |

# MC1436, C

## MAXIMUM RATINGS (T<sub>A</sub> = +25°C, unless otherwise noted.)

| Rating  | Symbol                             | MC1436      | MC1436C    | Unit        |
|---|------------------------------------|-------------|------------|-------------|
| Power Supply Voltage  | V <sub>CC</sub><br>V <sub>EE</sub> | +34<br>-34  | +30<br>-30 | Vdc         |
| Input Differential Voltage Range  | V <sub>IDR</sub>                   | Note 2      |            | V           |
| Input Common Mode Voltage Range   | V <sub>ICR</sub>                   | Note 2      |            | V           |
| Output Short Circuit Duration<br>(V <sub>CC</sub> = V <sub>EE</sub> = 28 Vdc, V <sub>O</sub> = 0) | t <sub>SC</sub>                    | 5.0         |            | sec         |
| Power Dissipation (Package Limitation)<br>Derate above T <sub>A</sub> = +25°C                     | P <sub>D</sub>                     | 680<br>4.6  |            | mW<br>mW/°C |
| Operating Ambient Temperature Range   | T <sub>A</sub>                     | 0 to +70    |            | °C          |
| Storage Temperature Range   | T <sub>stg</sub>                   | -65 to +150 |            | °C          |

## ELECTRICAL CHARACTERISTICS (V<sub>CC</sub> = +28 V, V<sub>EE</sub> = -28 V, T<sub>A</sub> = 25°C, unless otherwise noted.)

| Characteristic   | Symbol                           | MC1436           |              |        | MC1436C     |              |        | Unit                   |
|--|----------------------------------|------------------|--------------|--------|-------------|--------------|--------|------------------------|
|  |                                  | Min              | Typ          | Max    | Min         | Typ          | Max    |                        |
| Input Bias Current<br>T <sub>A</sub> = +25°C<br>T <sub>A</sub> = T <sub>low</sub> to T <sub>high</sub> (See Note 1)  | I <sub>IB</sub>                  | -                | 15           | 40     | -           | 25           | 90     | nAdc                   |
| Input Offset Current<br>T <sub>A</sub> = +25°C<br>T <sub>A</sub> = +25°C to T <sub>high</sub><br>T <sub>A</sub> = T <sub>low</sub> to +25°C  | I <sub>IO</sub>                  | -                | 5.0          | 10     | -           | 10           | 25     | nAdc                   |
| Input Offset Voltage<br>T <sub>A</sub> = +25°C<br>T <sub>A</sub> = T <sub>low</sub> to T <sub>high</sub>   | V <sub>IO</sub>                  | -                | 5.0          | 10     | -           | 5.0          | 12     | mVdc                   |
| Differential Input Impedance (Open loop, f ≤ 5.0 Hz)<br>Parallel Input Resistance<br>Parallel Input Capacitance  | r <sub>p</sub><br>C <sub>p</sub> | -                | 10           | -      | -           | 10           | -      | MΩ<br>pF               |
| Common Mode Input Impedance (f ≤ 5.0 Hz)   | z <sub>ic</sub>                  | -                | 250          | -      | -           | 250          | -      | MΩ                     |
| Input Common Mode Voltage Range  | V <sub>ICR</sub>                 | ±22              | ±25          | -      | ±18         | ±20          | -      | Vpk                    |
| Equivalent Input Noise Voltage<br>(A <sub>V</sub> = 100, R <sub>S</sub> = 10 kΩ, f = 1.0 kHz, BW = 1.0 Hz)   | e <sub>n</sub>                   | -                | 50           | -      | -           | 50           | -      | nV/(Hz) <sup>1/2</sup> |
| Common Mode Rejection (DC)   | CMR                              | 70               | 110          | -      | 50          | 90           | -      | dB                     |
| Large Signal DC Open Loop Voltage Gain<br>(V <sub>O</sub> = ±10 V, R <sub>L</sub> = 100 kΩ) T <sub>A</sub> = +25°C<br>T <sub>A</sub> = T <sub>low</sub> to T <sub>high</sub><br>(V <sub>O</sub> = ±10 V, R <sub>L</sub> = 10 kΩ, T <sub>A</sub> = +25°C) | A <sub>VOL</sub>                 | 70,000<br>50,000 | 500,000<br>- | -<br>- | 50,000<br>- | 500,000<br>- | -<br>- | V/V                    |
| Power Bandwidth (Voltage Follower)<br>(A <sub>V</sub> = 1, R <sub>L</sub> = 5.0 kΩ, THD ≤ 5%, V <sub>O</sub> = 40 V <sub>pp</sub> )  | BW <sub>p</sub>                  | -                | 23           | -      | -           | 23           | -      | kHz                    |
| Unity Gain Crossover Frequency (Open loop)   | f <sub>c</sub>                   | -                | 1.0          | -      | -           | 1.0          | -      | MHz                    |
| Phase Margin (Open loop, Unity Gain)   | φ <sub>m</sub>                   | -                | 50           | -      | -           | 50           | -      | Degrees                |
| Gain Margin  | A <sub>M</sub>                   | -                | 18           | -      | -           | 18           | -      | dB                     |
| Slew Rate (Unity Gain)   | SR                               | -                | 2.0          | -      | -           | 2.0          | -      | V/μs                   |
| Output Impedance (f ≤ 5.0 Hz)  | z <sub>O</sub>                   | -                | 1.0          | -      | -           | 1.0          | -      | kΩ                     |
| Short Circuit Output Current   | I <sub>SC</sub>                  | -                | ±17          | -      | -           | ±19          | -      | mAdc                   |

NOTES: 1. T<sub>low</sub> = 0°C for MC1436,C T<sub>high</sub> = +70°C for MC1436,C  
2. Either or both input voltages must not exceed the magnitude of V<sub>CC</sub> or V<sub>EE</sub> + 3.0 V.

# MC1436, C

## ELECTRICAL CHARACTERISTICS ( $V_{CC} = +28\text{ V}$ , $V_{EE} = -28\text{ V}$ , $T_A = 25^\circ\text{C}$ , unless otherwise noted.)

| Characteristic  | Symbol               | MC1436        |               |            | MC1436C       |               |            | Unit             |
|---|----------------------|---------------|---------------|------------|---------------|---------------|------------|------------------|
|   |                      | Min           | Typ           | Max        | Min           | Typ           | Max        |                  |
| Output Voltage Range ( $R_L = 5.0\text{ k}\Omega$ )<br>$V_{CC} = +28\text{ Vdc}$ , $V_{EE} = -28\text{ Vdc}$<br>$V_{CC} = +36\text{ Vdc}$ , $V_{EE} = -36\text{ Vdc}$ | $V_O$                | $\pm 20$<br>- | $\pm 22$<br>- | -<br>-     | $\pm 20$<br>- | $\pm 22$<br>- | -<br>-     | $V_{pk}$         |
| Power Supply Rejection<br>$V_{EE} = \text{Constant}$ , $R_S \leq 10\text{ k}\Omega$<br>$V_{CC} = \text{Constant}$ , $R_S \leq 10\text{ k}\Omega$                      | PSR +<br>PSR -       | -<br>-        | 35<br>35      | 200<br>200 | -<br>-        | 50<br>50      | -<br>-     | $\mu\text{V/V}$  |
| Power Supply Current (See Note 2)   | $I_{CC}$<br>$I_{EE}$ | -<br>-        | 2.6<br>2.6    | 5.0<br>5.0 | -<br>-        | 2.6<br>2.6    | 5.0<br>5.0 | $\text{mA}_{dc}$ |
| DC Quiescent Power Consumption ( $V_O = 0$ )  | $P_C$                | -             | 146           | 280        | -             | 146           | 280        | $\text{mW}$      |

NOTES: 2.  $V_{CC} = V_{EE} = 5.0\text{ Vdc}$  to  $30\text{ Vdc}$  for MC1436  
 $V_{CC} = V_{EE} = 5.0\text{ Vdc}$  to  $28\text{ Vdc}$  for MC1436C

Figure 3. Low-Drift Sample and Hold

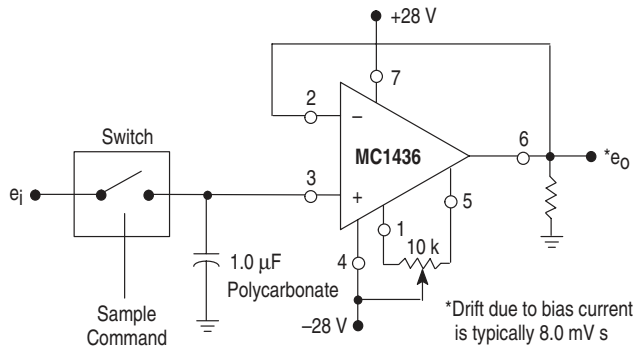


Figure 4. Power Bandwidth

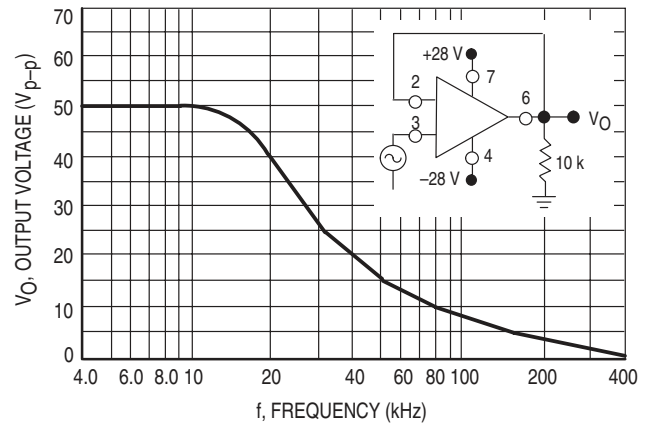


Figure 5. Peak Output Voltage Swing versus Power Supply Voltage

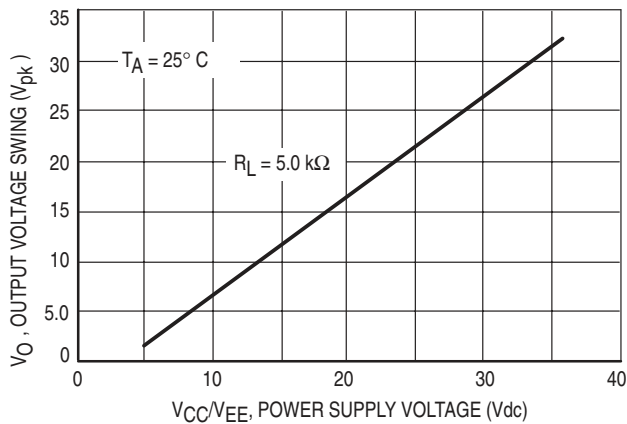


Figure 6. Open Loop Frequency Response

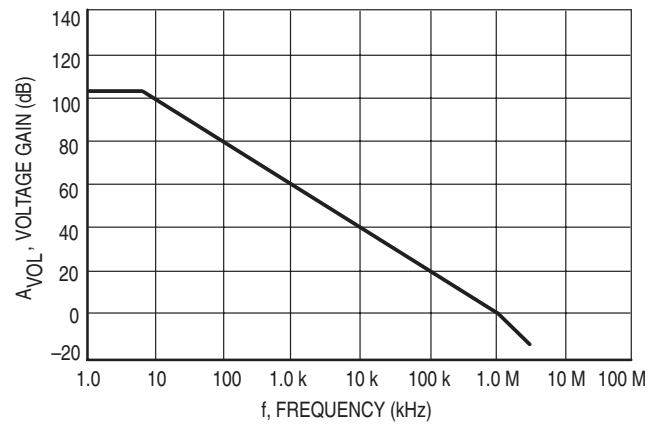


Figure 7. Output Short Circuit Current versus Temperature

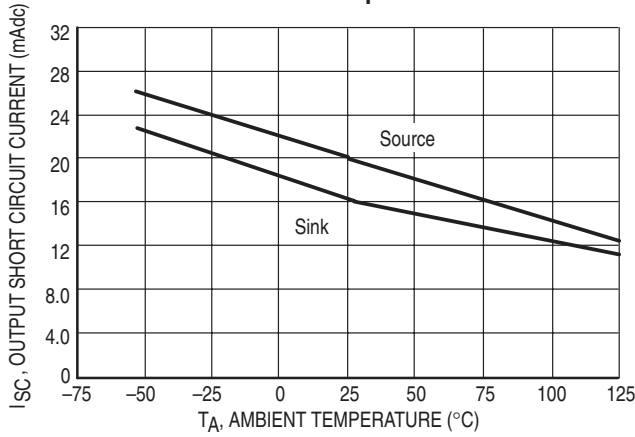


Figure 8. Input Bias Current versus Temperature

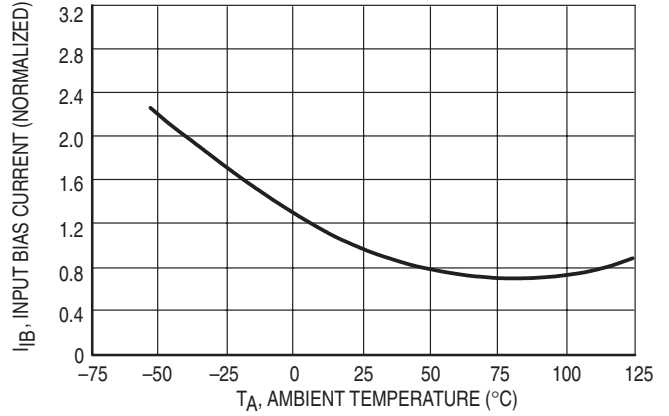


Figure 9. Inverting Feedback Model

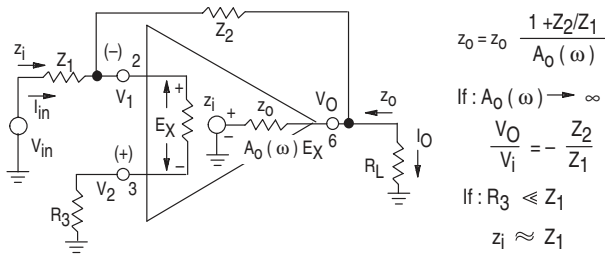


Figure 10. Noninverting Feedback Model



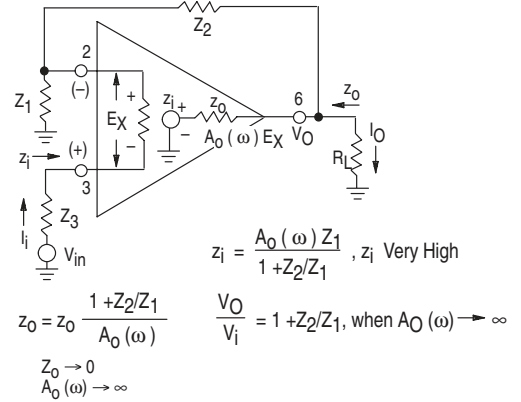


Figure 11. Audio Amplifier

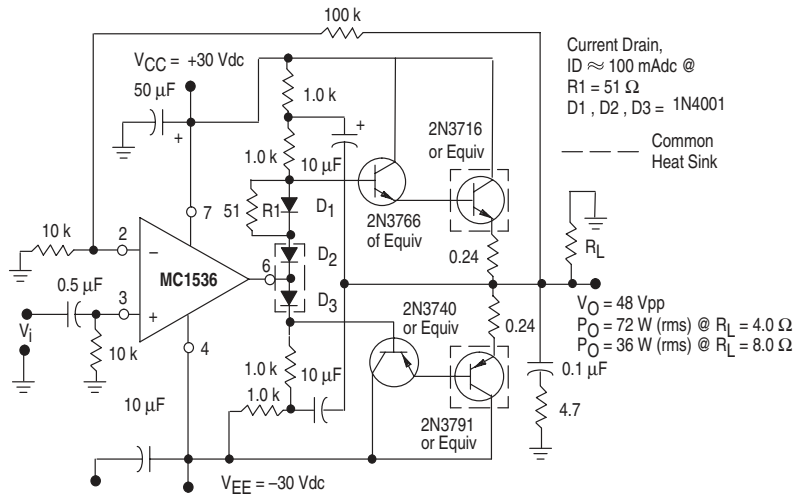


# MC1436, C


**Figure 12. Voltage Controlled Current Source or Transconductance Amplifier with 0 V to 40 V Compliance**

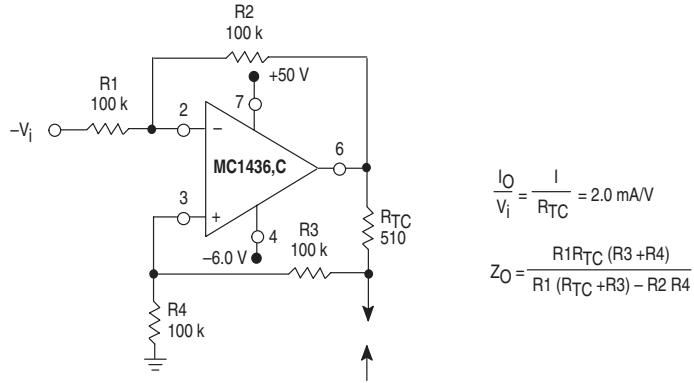

**Figure 13. Representative Schematic Diagram**

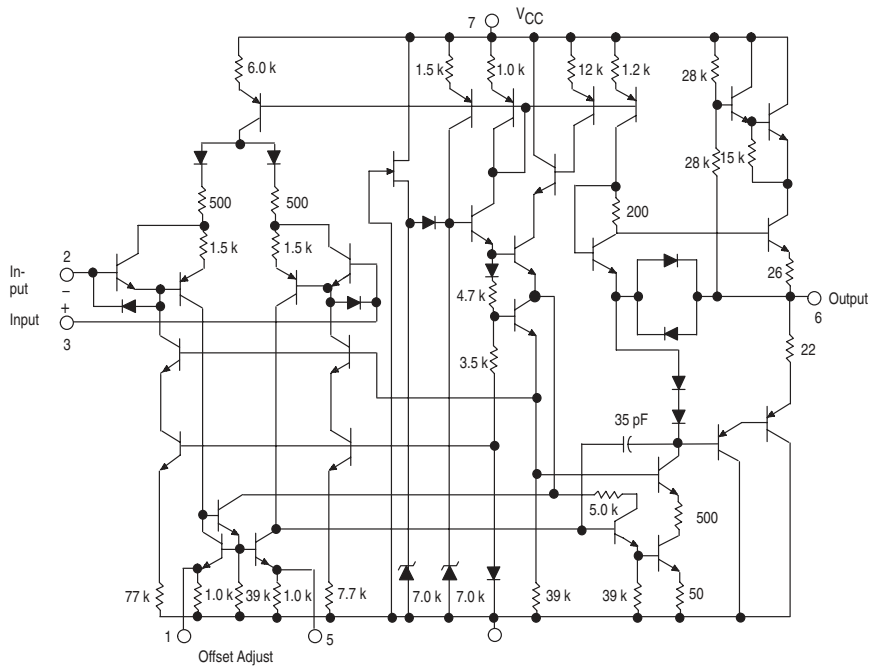

**Figure 14. Equivalent Circuit**

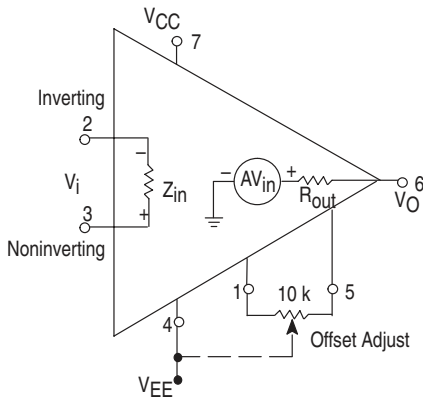


# Tape and Reel Options

---

## In Brief . . .

Motorola offers the convenience of Tape and Reel packaging for our growing family of standard integrated circuit products. Reels are available to support the requirements of both first and second generation pick-and-place equipment. The packaging fully conforms to the latest EIA-481A specification. The antistatic embossed tape provides a secure cavity, sealed with a peel-back cover tape.

|   | <b>Page</b> |
|---|-------------|
| Tape and Reel Configurations . . . . .    | 12-2        |
| Tape and Reel Information Table . . . . . | 12-4        |
| Analog MPQ Table . . . . .                | 12-5        |




# Tape and Reel Configurations

## Mechanical Polarization


### SOIC and Micro-8 DEVICES

Typical

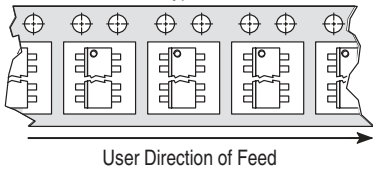


### PLCC DEVICES

Typical

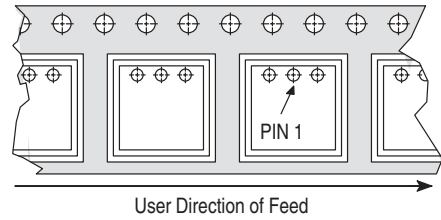


### DPAK and D<sup>2</sup>PAK DEVICES

Typical

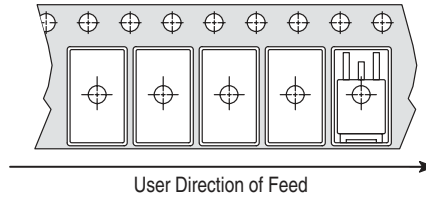


### SOT-23 (5 Pin) DEVICES

Typical




### SOT-89 (3 Pin) DEVICES

Typical





### SOT-89 (5 Pin) DEVICES

Typical





# Tape and Reel Configurations (continued)

## TO-92 Reel Styles

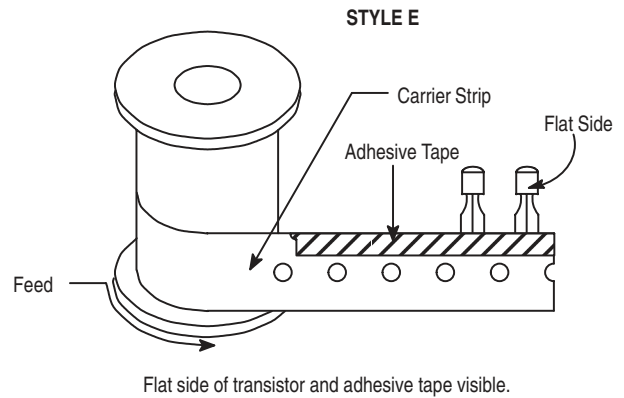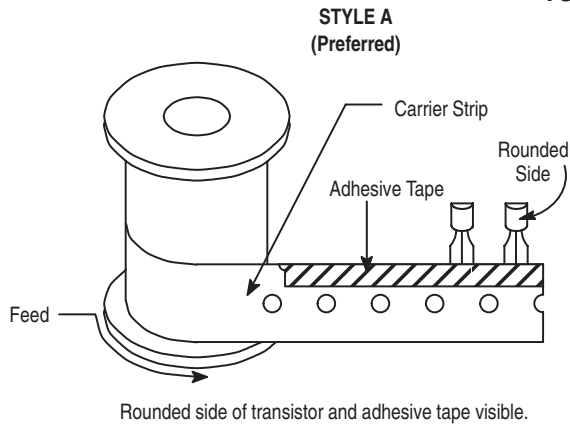


## TO-92 Ammo Pack Styles

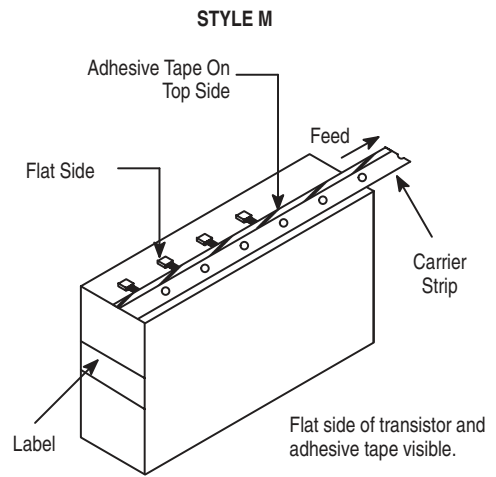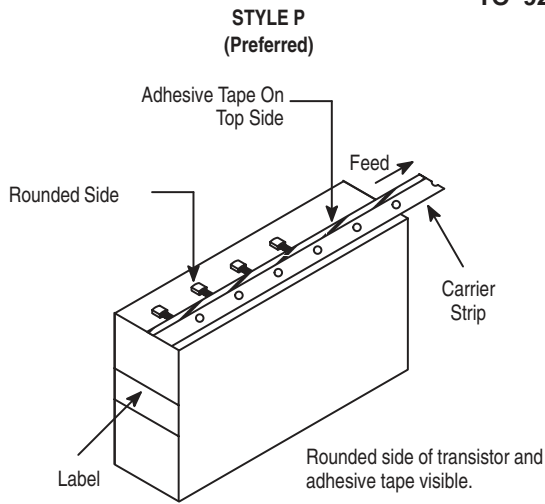

Style P ammo pack is equivalent to Styles A and B of reel pack dependent on feed orientation from box.

Style M ammo pack is equivalent to Style E of reel pack dependent on feed orientation from box.

## TO-92 EIA Radial Tape in Fan Fold Box or On Reel

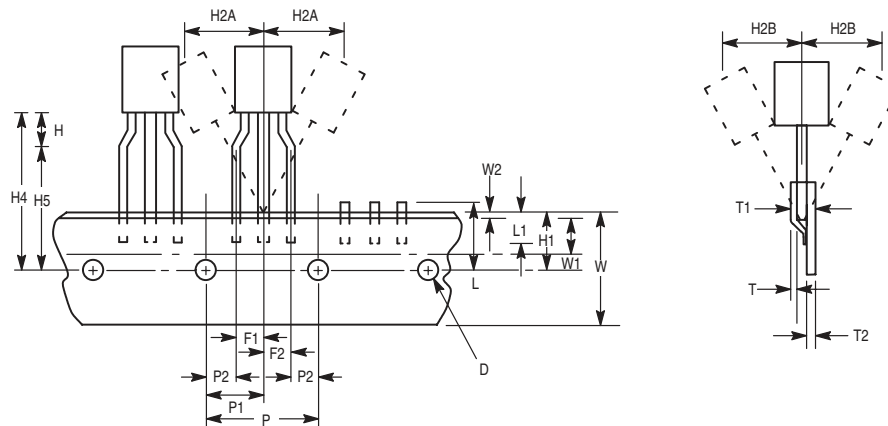



# Tape and Reel Information Table

| Package                         | Tape Width (mm) | Devices <sup>(1)</sup> per Reel | Reel Size (inch) | Device Suffix                         |
|---------------------------------|-----------------|---------------------------------|------------------|---------------------------------------|
| SO-8, SOP-8                     | 12              | 2,500                           | 13               | R2                                    |
| SO-14                           | 16              | 2,500                           | 13               | R2                                    |
| SO-16                           | 16              | 2,500                           | 13               | R2                                    |
| SO-16L, SO-8+8L WIDE            | 16              | 1,000                           | 13               | R2                                    |
| SO-20L WIDE                     | 24              | 1,000                           | 13               | R2                                    |
| SO-24L WIDE                     | 24              | 1,000                           | 13               | R2                                    |
| SO-28L WIDE                     | 24              | 1,000                           | 13               | R2                                    |
| SO-28L WIDE                     | 32              | 1,000                           | 13               | R3                                    |
| Micro-8                         | 12              | 2,500                           | 13               | R2                                    |
| PLCC-20                         | 16              | 1,000                           | 13               | R2                                    |
| PLCC-28                         | 24              | 500                             | 13               | R2                                    |
| PLCC-44                         | 32              | 500                             | 13               | R2                                    |
| PLCC-52                         | 32              | 500                             | 13               | R2                                    |
| PLCC-68                         | 44              | 250                             | 13               | R2                                    |
| PLCC-84                         | 44              | 250                             | 13               | R2                                    |
| TO-226AA (TO-92) <sup>(2)</sup> | 18              | 2,000                           | 13               | RA, RE, RP, or RM<br>(Ammo Pack) only |
| DPAK                            | 16              | 2,500                           | 13               | RK                                    |
| D <sup>2</sup> PAK              | 24              | 800                             | 13               | R4                                    |
| SOT-23 (5 Pin)                  | 8               | 3,000                           | 7                | TR                                    |
| SOT-89 (3/5 Pin)                | 12              | 1,000                           | 7                | T1                                    |

<sup>(1)</sup> Minimum order quantity is 1 reel. Distributors/OEM customers may break lots or reels at their option, however broken reels may not be returned.

<sup>(2)</sup> Integrated circuits in TO-226AA packages are available in Styes A and E only, with optional "Ammo Pack" (Suffix RP or RM). The RA and RP configurations are preferred. For ordering information please contact your local Motorola Semiconductor Sales Office.

# Analog MPQ Table

## Tape/Reel and Ammo Pack

| Package Type          | Package Code | MPQ            |
|-----------------------|--------------|----------------|
| <b>PLCC</b>           |              |                |
| Case 775              | 0802         | 1000/reel      |
| Case 776              | 0804         | 500/reel       |
| Case 777              | 0801         | 500/reel       |
| <b>SOIC</b>           |              |                |
| Case 751              | 0095         | 2500/reel      |
| Case 751A             | 0096         | 2500/reel      |
| Case 751B             | 0097         | 2500/reel      |
| Case 751G             | 2003         | 1000/reel      |
| Case 751D             | 2005         | 1000/reel      |
| Case 751E             | 2008         | 1000/reel      |
| Case 751F             | 2009         | 1000/reel      |
| <b>Micro-8</b>        |              |                |
| Case 846A             | -            | 2500/reel      |
| <b>TO-92</b>          |              |                |
| Case 29               | 0031         | 2000/reel      |
| Case 29               | 0031         | 2000/Ammo Pack |
| <b>DPAK</b>           |              |                |
| Case 369A             | -            | 2500/reel      |
| <b>D2PAK</b>          |              |                |
| Case 936              | -            | 800/reel       |
| <b>SOT-23 (5 Pin)</b> |              |                |
| Case 1212             | -            | 3000/reel      |
| <b>SOT-89 (3 Pin)</b> |              |                |
| Case 1213             | -            | 1000/reel      |
| <b>SOT-89 (5 Pin)</b> |              |                |
| Case 1214             | -            | 1000/reel      |



# Packaging Information

---

## In Brief . . .

*The packaging availability for each device type is indicated on the individual data sheets and the Selector Guide. All of the outline dimensions for the packages are given in this section.*

*The maximum power consumption an integrated circuit can tolerate at a given operating ambient temperature can be found from the equation:*

$$P_{D(TA)} = \frac{T_{J(max)} - T_A}{R_{\theta JA(Typ)}}$$

*where:*

$P_{D(TA)}$  = *Power Dissipation allowable at a given operating ambient temperature. This must be greater than the sum of the products of the supply voltages and supply currents at the worst case operating condition.*




$T_{J(max)}$  = *Maximum operating Junction Temperature as listed in the Maximum Ratings Section. See individual data sheets for  $T_{J(max)}$  information.*

$T_A$  = *Maximum desired operating Ambient Temperature*

$R_{\theta JA(Typ)}$  = *Typical Thermal Resistance Junction-to-Ambient*

# Case Outline Dimensions

**LP, P, Z SUFFIX**  
**CASE 29-04**  
 Plastic Package  
 (TO-226AA/TO-92)  
 ISSUE AD

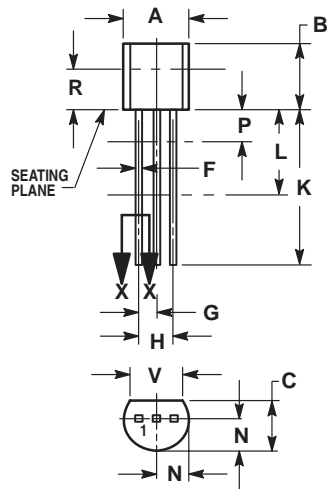



**NOTES:**

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.
3. CONTOUR OF PACKAGE BEYOND DIMENSION R IS UNCONTROLLED.
4. DIMENSION F APPLIES BETWEEN P AND L. DIMENSION D AND J APPLY BETWEEN L AND K MINIMUM. LEAD DIMENSION IS UNCONTROLLED IN P AND BEYOND DIMENSION K MINIMUM.

| DIM | INCHES |       | MILLIMETERS |      |
|-----|--------|-------|-------------|------|
|     | MIN    | MAX   | MIN         | MAX  |
| A   | 0.175  | 0.205 | 4.45        | 5.20 |
| B   | 0.170  | 0.210 | 4.32        | 5.33 |
| C   | 0.125  | 0.165 | 3.18        | 4.19 |
| D   | 0.016  | 0.022 | 0.41        | 0.55 |
| F   | 0.016  | 0.019 | 0.41        | 0.48 |
| G   | 0.045  | 0.055 | 1.15        | 1.39 |
| H   | 0.095  | 0.105 | 2.42        | 2.66 |
| J   | 0.015  | 0.020 | 0.39        | 0.50 |
| K   | 0.500  | —     | 12.70       | —    |
| L   | 0.250  | —     | 6.35        | —    |
| N   | 0.080  | 0.105 | 2.04        | 2.66 |
| P   | —      | 0.100 | —           | 2.54 |
| R   | 0.115  | —     | 2.93        | —    |
| V   | 0.135  | —     | 3.43        | —    |

**KC, T SUFFIX**  
**CASE 221A-06**  
 Plastic Package  
 ISSUE Y

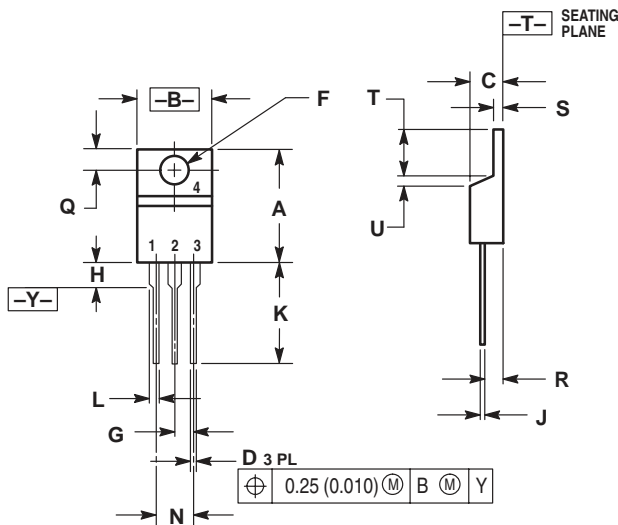



**NOTES:**

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.

| DIM | INCHES    |       | MILLIMETERS |       |
|-----|-----------|-------|-------------|-------|
|     | MIN       | MAX   | MIN         | MAX   |
| A   | 0.560     | 0.625 | 14.23       | 15.87 |
| B   | 0.380     | 0.420 | 9.66        | 10.66 |
| C   | 0.140     | 0.190 | 3.56        | 4.82  |
| D   | 0.020     | 0.045 | 0.51        | 1.14  |
| F   | 0.139     | 0.155 | 3.53        | 3.93  |
| G   | 0.100 BSC | —     | 2.54 BSC    | —     |
| H   | —         | 0.280 | —           | 7.11  |
| J   | 0.012     | 0.045 | 0.31        | 1.14  |
| K   | 0.500     | 0.580 | 12.70       | 14.73 |
| L   | 0.045     | 0.070 | 1.15        | 1.77  |
| N   | 0.200 BSC | —     | 5.08 BSC    | —     |
| Q   | 0.100     | 0.135 | 2.54        | 3.42  |
| R   | 0.080     | 0.115 | 2.04        | 2.92  |
| S   | 0.020     | 0.055 | 0.51        | 1.39  |
| T   | 0.235     | 0.255 | 5.97        | 6.47  |
| U   | 0.000     | 0.050 | 0.00        | 1.27  |

**TH SUFFIX**  
**CASE 314A-03**  
 Plastic Package  
 ISSUE D

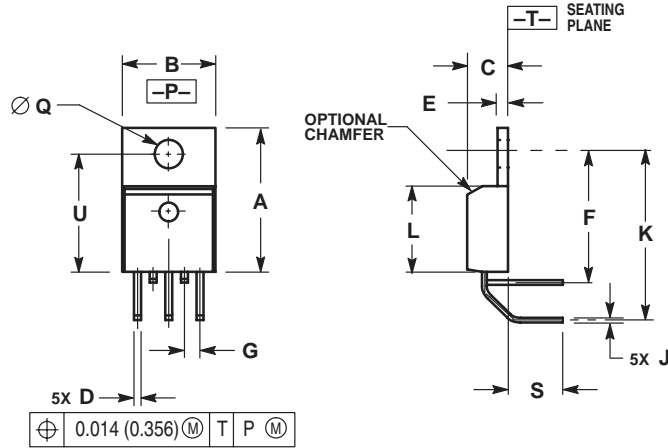



**NOTES:**

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.
3. DIMENSION D DOES NOT INCLUDE INTERCONNECT BAR (DAMBAR) PROTRUSION. DIMENSION D INCLUDING PROTRUSION SHALL NOT EXCEED 0.043 (1.092) MAXIMUM.

| DIM | INCHES    |       | MILLIMETERS |        |
|-----|-----------|-------|-------------|--------|
|     | MIN       | MAX   | MIN         | MAX    |
| A   | 0.572     | 0.613 | 14.529      | 15.570 |
| B   | 0.390     | 0.415 | 9.906       | 10.541 |
| C   | 0.170     | 0.180 | 4.318       | 4.572  |
| D   | 0.025     | 0.038 | 0.635       | 0.965  |
| E   | 0.048     | 0.055 | 1.219       | 1.397  |
| F   | 0.570     | 0.585 | 14.478      | 14.859 |
| G   | 0.067 BSC |       | 1.702 BSC   |        |
| J   | 0.015     | 0.025 | 0.381       | 0.635  |
| K   | 0.730     | 0.745 | 18.542      | 18.923 |
| L   | 0.320     | 0.365 | 8.128       | 9.271  |
| Q   | 0.140     | 0.153 | 3.556       | 3.886  |
| S   | 0.210     | 0.260 | 5.334       | 6.604  |
| U   | 0.468     | 0.505 | 11.888      | 12.827 |

**T, TV SUFFIX**  
**CASE 314B-05**  
 Plastic Package  
 ISSUE J

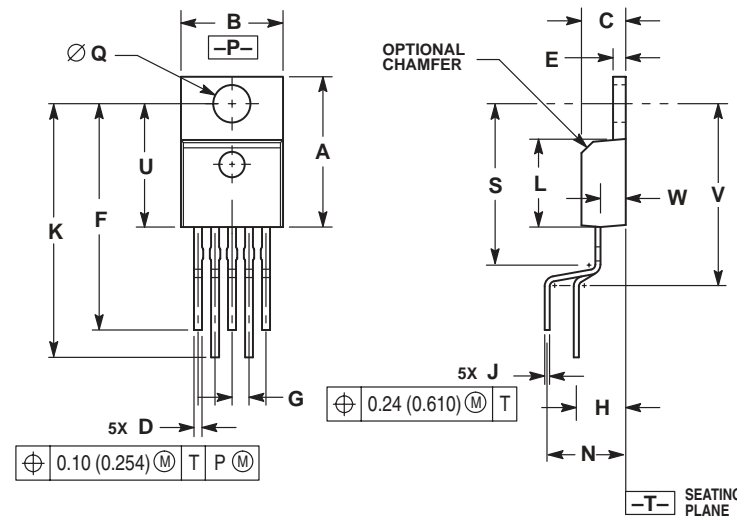



**NOTES:**

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.
3. DIMENSION D DOES NOT INCLUDE INTERCONNECT BAR (DAMBAR) PROTRUSION. DIMENSION D INCLUDING PROTRUSION SHALL NOT EXCEED 0.043 (1.092) MAXIMUM.

| DIM | INCHES    |       | MILLIMETERS |        |
|-----|-----------|-------|-------------|--------|
|     | MIN       | MAX   | MIN         | MAX    |
| A   | 0.572     | 0.613 | 14.529      | 15.570 |
| B   | 0.390     | 0.415 | 9.906       | 10.541 |
| C   | 0.170     | 0.180 | 4.318       | 4.572  |
| D   | 0.025     | 0.038 | 0.635       | 0.965  |
| E   | 0.048     | 0.055 | 1.219       | 1.397  |
| F   | 0.850     | 0.935 | 21.590      | 23.749 |
| G   | 0.067 BSC |       | 1.702 BSC   |        |
| H   | 0.166 BSC |       | 4.216 BSC   |        |
| J   | 0.015     | 0.025 | 0.381       | 0.635  |
| K   | 0.900     | 1.100 | 22.860      | 27.940 |
| L   | 0.320     | 0.365 | 8.128       | 9.271  |
| N   | 0.320 BSC |       | 8.128 BSC   |        |
| Q   | 0.140     | 0.153 | 3.556       | 3.886  |
| S   | —         | 0.620 | —           | 15.748 |
| U   | 0.468     | 0.505 | 11.888      | 12.827 |
| V   | —         | 0.735 | —           | 18.669 |
| W   | 0.090     | 0.110 | 2.286       | 2.794  |

**T SUFFIX**  
**CASE 314C-01**  
 Plastic Package  
 ISSUE A

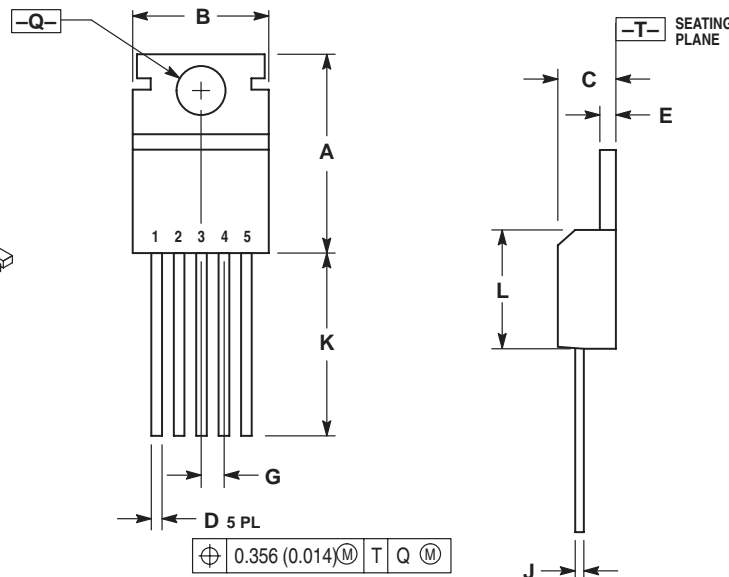



**NOTES:**

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.
3. DIMENSION D DOES NOT INCLUDE INTERCONNECT BAR (DAMBAR) PROTRUSION. DIMENSION D INCLUDING PROTRUSION SHALL NOT EXCEED 10.92 (0.043) MAXIMUM.

| DIM | INCHES    |       | MILLIMETERS |       |
|-----|-----------|-------|-------------|-------|
|     | MIN       | MAX   | MIN         | MAX   |
| A   | 0.610     | 0.625 | 15.59       | 15.88 |
| B   | 0.380     | 0.420 | 9.65        | 10.67 |
| C   | 0.160     | 0.190 | 4.06        | 4.83  |
| D   | 0.020     | 0.040 | 0.51        | 1.02  |
| E   | 0.035     | 0.055 | 0.89        | 1.40  |
| G   | 0.067 BSC |       | 1.702 BSC   |       |
| J   | 0.015     | 0.025 | 0.38        | 0.64  |
| K   | 0.500     | —     | 12.70       | —     |
| L   | 0.355     | 0.370 | 9.02        | 9.40  |
| Q   | 0.139     | 0.147 | 3.53        | 3.73  |



**T, T1 SUFFIX**  
**CASE 314D-03**  
 Plastic Package  
 ISSUE D

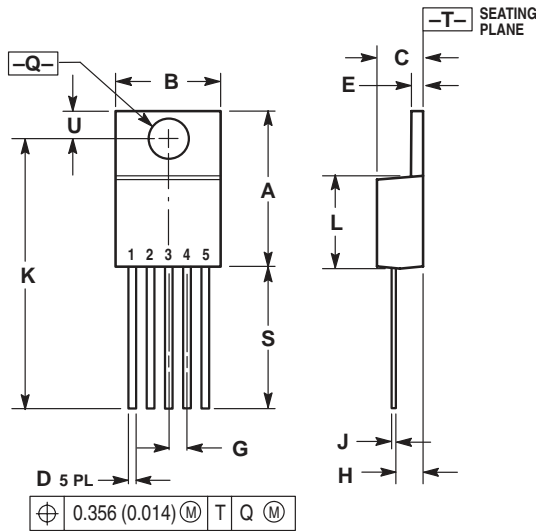

- NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
  2. CONTROLLING DIMENSION: INCH.
  3. DIMENSION D DOES NOT INCLUDE INTERCONNECT BAR (DAMBAR) PROTRUSION. DIMENSION D INCLUDING PROTRUSION SHALL NOT EXCEED 10.92 (0.043) MAXIMUM.

| DIM | INCHES    |       | MILLIMETERS |        |
|-----|-----------|-------|-------------|--------|
|     | MIN       | MAX   | MIN         | MAX    |
| A   | 0.572     | 0.613 | 14.529      | 15.570 |
| B   | 0.390     | 0.415 | 9.906       | 10.541 |
| C   | 0.170     | 0.180 | 4.318       | 4.572  |
| D   | 0.025     | 0.038 | 0.635       | 0.965  |
| E   | 0.048     | 0.055 | 1.219       | 1.397  |
| G   | 0.067 BSC |       | 1.702 BSC   |        |
| H   | 0.087     | 0.112 | 2.210       | 2.845  |
| J   | 0.015     | 0.025 | 0.381       | 0.635  |
| K   | 1.020     | 1.065 | 25.908      | 27.051 |
| L   | 0.320     | 0.365 | 8.128       | 9.271  |
| Q   | 0.140     | 0.153 | 3.556       | 3.886  |
| U   | 0.105     | 0.117 | 2.667       | 2.972  |
| S   | 0.543     | 0.582 | 13.792      | 14.783 |



**DT-1 SUFFIX**  
**CASE 369-07**  
 Plastic Package (DPAK)  
 ISSUE K

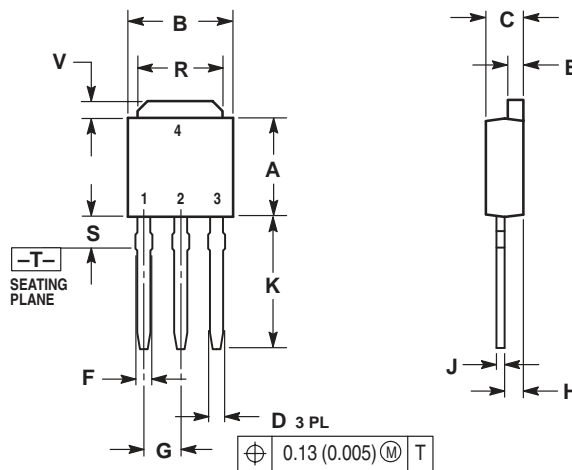

- NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
  2. CONTROLLING DIMENSION: INCH.

| DIM | INCHES    |       | MILLIMETERS |      |
|-----|-----------|-------|-------------|------|
|     | MIN       | MAX   | MIN         | MAX  |
| A   | 0.235     | 0.250 | 5.97        | 6.35 |
| B   | 0.250     | 0.265 | 6.35        | 6.73 |
| C   | 0.086     | 0.094 | 2.19        | 2.38 |
| D   | 0.027     | 0.035 | 0.69        | 0.88 |
| E   | 0.033     | 0.040 | 0.84        | 1.01 |
| F   | 0.037     | 0.047 | 0.94        | 1.19 |
| G   | 0.090 BSC |       | 2.29 BSC    |      |
| H   | 0.034     | 0.040 | 0.87        | 1.01 |
| J   | 0.018     | 0.023 | 0.46        | 0.58 |
| K   | 0.350     | 0.380 | 8.89        | 9.65 |
| R   | 0.175     | 0.215 | 4.45        | 5.46 |
| S   | 0.050     | 0.090 | 1.27        | 2.28 |
| V   | 0.030     | 0.050 | 0.77        | 1.27 |



**DT SUFFIX**  
**CASE 369A-13**  
 Plastic Package (DPAK)  
 ISSUE Y

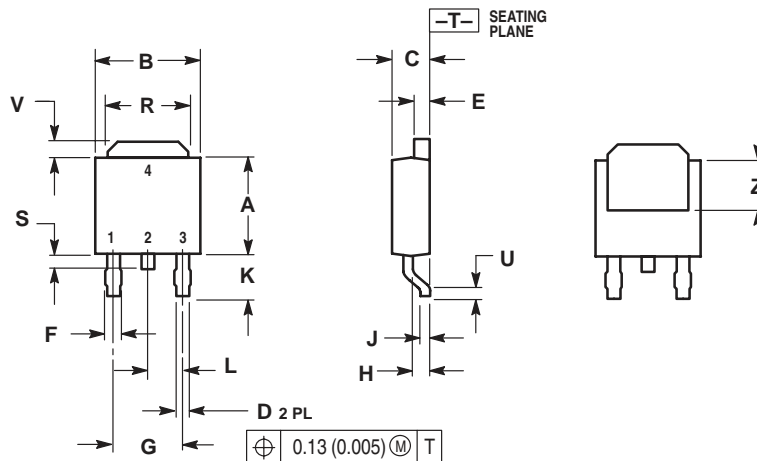

- NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
  2. CONTROLLING DIMENSION: INCH.

| DIM | INCHES    |       | MILLIMETERS |      |
|-----|-----------|-------|-------------|------|
|     | MIN       | MAX   | MIN         | MAX  |
| A   | 0.235     | 0.250 | 5.97        | 6.35 |
| B   | 0.250     | 0.265 | 6.35        | 6.73 |
| C   | 0.086     | 0.094 | 2.19        | 2.38 |
| D   | 0.027     | 0.035 | 0.69        | 0.88 |
| E   | 0.033     | 0.040 | 0.84        | 1.01 |
| F   | 0.037     | 0.047 | 0.94        | 1.19 |
| G   | 0.180 BSC |       | 4.58 BSC    |      |
| H   | 0.034     | 0.040 | 0.87        | 1.01 |
| J   | 0.018     | 0.023 | 0.46        | 0.58 |
| K   | 0.102     | 0.114 | 2.60        | 2.89 |
| L   | 0.090 BSC |       | 2.29 BSC    |      |
| R   | 0.175     | 0.215 | 4.45        | 5.46 |
| S   | 0.020     | 0.050 | 0.51        | 1.27 |
| U   | 0.020     | —     | 0.51        | —    |
| V   | 0.030     | 0.050 | 0.77        | 1.27 |
| Z   | 0.138     | —     | 3.51        | —    |



**DP1, N, P, P1 SUFFIX**  
**CASE 626-05**  
 Plastic Package  
 ISSUE K

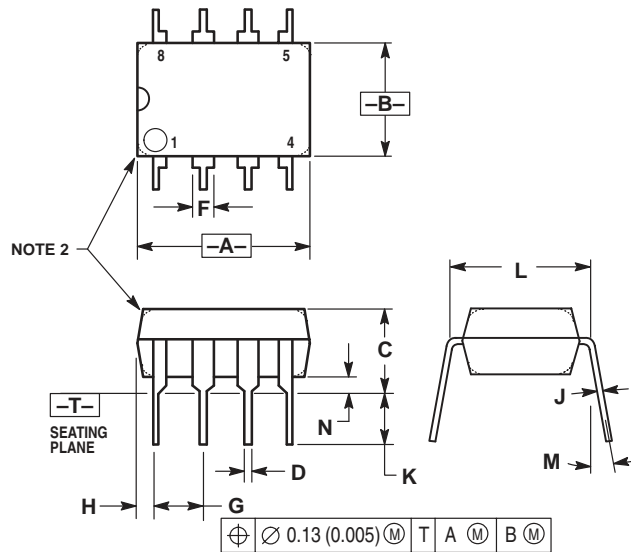

- NOTES:
1. DIMENSION L TO CENTER OF LEAD WHEN FORMED PARALLEL.
  2. PACKAGE CONTOUR OPTIONAL (ROUND OR SQUARE CORNERS).
  3. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.

| DIM | MILLIMETERS |       | INCHES    |       |
|-----|-------------|-------|-----------|-------|
|     | MIN         | MAX   | MIN       | MAX   |
| A   | 9.40        | 10.16 | 0.370     | 0.400 |
| B   | 6.10        | 6.60  | 0.240     | 0.260 |
| C   | 3.94        | 4.45  | 0.155     | 0.175 |
| D   | 0.38        | 0.51  | 0.015     | 0.020 |
| F   | 1.02        | 1.78  | 0.040     | 0.070 |
| G   | 2.54 BSC    |       | 0.100 BSC |       |
| H   | 0.76        | 1.27  | 0.030     | 0.050 |
| J   | 0.20        | 0.30  | 0.008     | 0.012 |
| K   | 2.92        | 3.43  | 0.115     | 0.135 |
| L   | 7.62 BSC    |       | 0.300 BSC |       |
| M   | 10°         |       | 10°       |       |
| N   | 0.76        | 1.01  | 0.030     | 0.040 |



**N, P, N-14, P2 SUFFIX**  
**CASE 646-06**  
 Plastic Package  
 ISSUE L

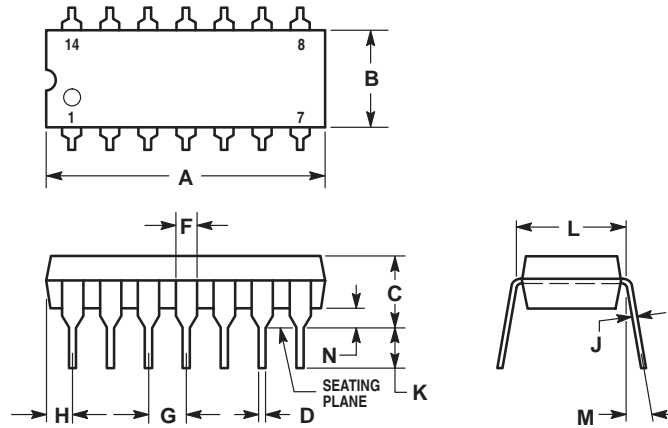

- NOTES:
1. LEADS WITHIN 0.13 (0.005) RADIUS OF TRUE POSITION AT SEATING PLANE AT MAXIMUM MATERIAL CONDITION.
  2. DIMENSION L TO CENTER OF LEADS WHEN FORMED PARALLEL.
  3. DIMENSION B DOES NOT INCLUDE MOLD FLASH.
  4. ROUNDED CORNERS OPTIONAL.

| DIM | INCHES    |       | MILLIMETERS |       |
|-----|-----------|-------|-------------|-------|
|     | MIN       | MAX   | MIN         | MAX   |
| A   | 0.715     | 0.770 | 18.16       | 19.56 |
| B   | 0.240     | 0.260 | 6.10        | 6.60  |
| C   | 0.145     | 0.185 | 3.69        | 4.69  |
| D   | 0.015     | 0.021 | 0.38        | 0.53  |
| F   | 0.040     | 0.070 | 1.02        | 1.78  |
| G   | 0.100 BSC |       | 2.54 BSC    |       |
| H   | 0.052     | 0.095 | 1.32        | 2.41  |
| J   | 0.008     | 0.015 | 0.20        | 0.38  |
| K   | 0.115     | 0.135 | 2.92        | 3.43  |
| L   | 0.300 BSC |       | 7.62 BSC    |       |
| M   | 0°        |       | 10°         |       |
| N   | 0.015     | 0.039 | 0.39        | 1.01  |

**DP2, N, P, PC SUFFIX**  
**CASE 648-08**  
 Plastic Package  
 ISSUE R

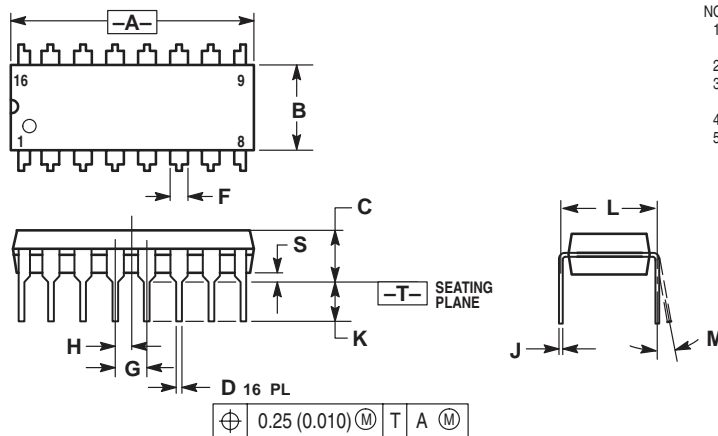



- NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
  2. CONTROLLING DIMENSION: INCH.
  3. DIMENSION L TO CENTER OF LEADS WHEN FORMED PARALLEL.
  4. DIMENSION B DOES NOT INCLUDE MOLD FLASH.
  5. ROUNDED CORNERS OPTIONAL.

| DIM | INCHES    |       | MILLIMETERS |       |
|-----|-----------|-------|-------------|-------|
|     | MIN       | MAX   | MIN         | MAX   |
| A   | 0.740     | 0.770 | 18.80       | 19.55 |
| B   | 0.250     | 0.270 | 6.35        | 6.85  |
| C   | 0.145     | 0.175 | 3.69        | 4.44  |
| D   | 0.015     | 0.021 | 0.39        | 0.53  |
| F   | 0.040     | 0.70  | 1.02        | 1.77  |
| G   | 0.100 BSC |       | 2.54 BSC    |       |
| H   | 0.050 BSC |       | 1.27 BSC    |       |
| J   | 0.008     | 0.015 | 0.21        | 0.38  |
| K   | 0.110     | 0.130 | 2.80        | 3.30  |
| L   | 0.295     | 0.305 | 7.50        | 7.74  |
| M   | 0°        |       | 10°         |       |
| S   | 0.020     | 0.040 | 0.51        | 1.01  |





**B, P, P2, V SUFFIX**  
**CASE 648C-03**  
 Plastic Package  
 (DIP-16)  
 ISSUE C

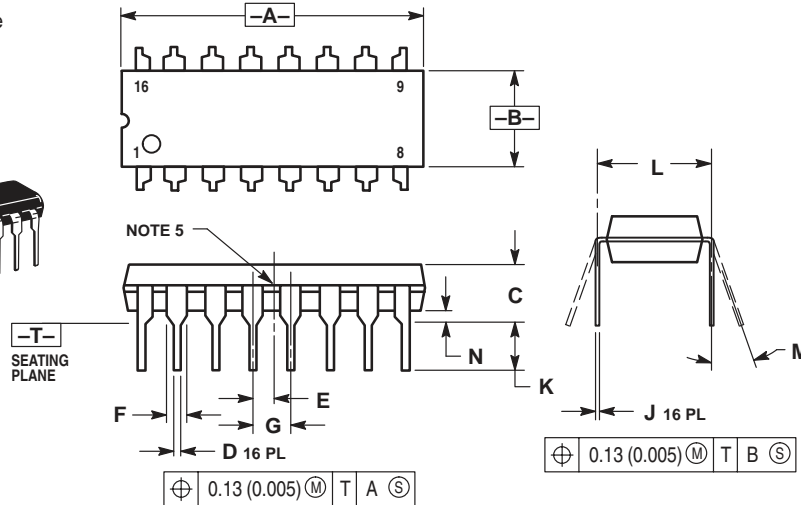

- NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
  2. CONTROLLING DIMENSION: INCH.
  3. DIMENSION L TO CENTER OF LEADS WHEN FORMED PARALLEL.
  4. DIMENSION B DOES NOT INCLUDE MOLD FLASH.
  5. INTERNAL LEAD CONNECTION BETWEEN 4 AND 5, 12 AND 13.

| DIM | INCHES    |       | MILLIMETERS |       |
|-----|-----------|-------|-------------|-------|
|     | MIN       | MAX   | MIN         | MAX   |
| A   | 0.740     | 0.840 | 18.80       | 21.34 |
| B   | 0.240     | 0.260 | 6.10        | 6.60  |
| C   | 0.145     | 0.185 | 3.69        | 4.69  |
| D   | 0.015     | 0.021 | 0.38        | 0.53  |
| E   | 0.050 BSC |       |             |       |
| F   | 0.040     | 0.70  | 1.02        | 1.78  |
| G   | 0.100 BSC |       |             |       |
| J   | 0.008     | 0.015 | 0.20        | 0.38  |
| K   | 0.115     | 0.135 | 2.92        | 3.43  |
| L   | 0.300 BSC |       |             |       |
| M   | 0°        | 10°   | 0°          | 10°   |
| N   | 0.015     | 0.040 | 0.39        | 1.01  |



**P SUFFIX**  
**CASE 648E-01**  
 Plastic Package  
 (DIP-16)  
 ISSUE O

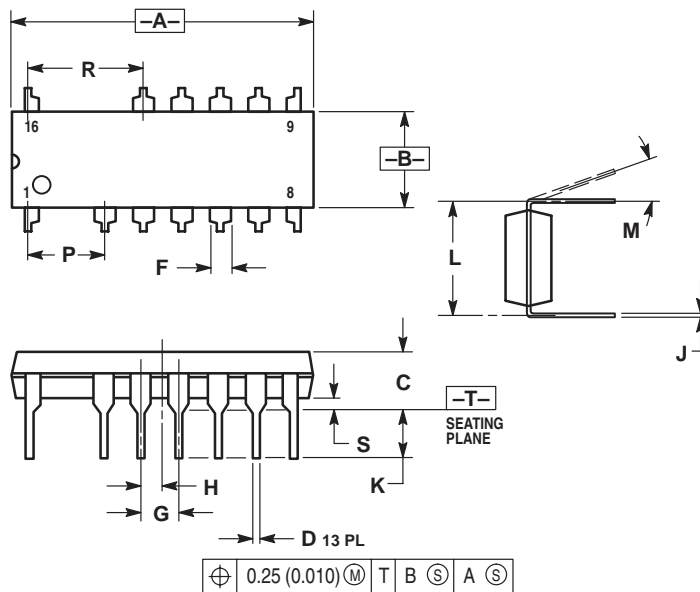

- NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
  2. CONTROLLING DIMENSION: INCH.
  3. DIMENSION L TO CENTER OF LEADS WHEN FORMED PARALLEL.
  4. DIMENSION A AND B DOES NOT INCLUDE MOLD PROTRUSION.
  5. MOLD FLASH OR PROTRUSIONS SHALL NOT EXCEED 0.25 (0.010).
  6. ROUNDED CORNER OPTIONAL.

| DIM | INCHES    |       | MILLIMETERS |       |
|-----|-----------|-------|-------------|-------|
|     | MIN       | MAX   | MIN         | MAX   |
| A   | 0.740     | 0.760 | 18.80       | 19.30 |
| B   | 0.245     | 0.260 | 6.23        | 6.60  |
| C   | 0.145     | 0.175 | 3.69        | 4.44  |
| D   | 0.015     | 0.021 | 0.39        | 0.53  |
| F   | 0.050     | 0.070 | 1.27        | 1.77  |
| G   | 0.100 BSC |       |             |       |
| H   | 0.050 BSC |       |             |       |
| J   | 0.008     | 0.015 | 0.21        | 0.38  |
| K   | 0.120     | 0.140 | 3.05        | 3.55  |
| L   | 0.295     | 0.305 | 7.50        | 7.74  |
| M   | 0°        | 10°   | 0°          | 10°   |
| P   | 0.200 BSC |       |             |       |
| R   | 0.300 BSC |       |             |       |
| S   | 0.015     | 0.035 | 0.39        | 0.88  |



**P SUFFIX**  
**CASE 649-03**  
 Plastic Package  
 ISSUE D

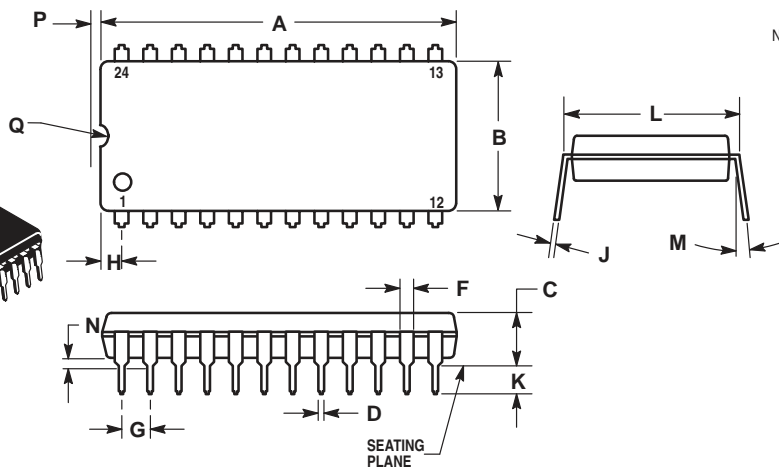

- NOTES:
1. LEADS WITHIN 0.13 (0.005) RADIUS OF TRUE POSITION AT SEATING PLANE AT MAXIMUM MATERIAL CONDITION.
  2. DIMENSION L TO CENTER OF LEADS WHEN FORMED PARALLEL.

| DIM | MILLIMETERS |       | INCHES    |       |
|-----|-------------|-------|-----------|-------|
|     | MIN         | MAX   | MIN       | MAX   |
| A   | 31.50       | 32.13 | 1.240     | 1.265 |
| B   | 13.21       | 13.72 | 0.520     | 0.540 |
| C   | 4.70        | 5.21  | 0.185     | 0.205 |
| D   | 0.38        | 0.51  | 0.015     | 0.020 |
| F   | 1.02        | 1.52  | 0.040     | 0.060 |
| G   | 2.54 BSC    |       | 0.100 BSC |       |
| H   | 1.65        | 2.16  | 0.065     | 0.085 |
| J   | 0.20        | 0.30  | 0.008     | 0.012 |
| K   | 2.92        | 3.43  | 0.115     | 0.135 |
| L   | 14.99       | 15.49 | 0.590     | 0.610 |
| M   | 10°         |       |           |       |
| N   | 0.51        | 1.02  | 0.020     | 0.040 |
| P   | 0.13        | 0.38  | 0.005     | 0.015 |
| Q   | 0.51        | 0.76  | 0.020     | 0.030 |

**A, B, N, P SUFFIX**  
**CASE 707-02**  
 Plastic Package  
 ISSUE C

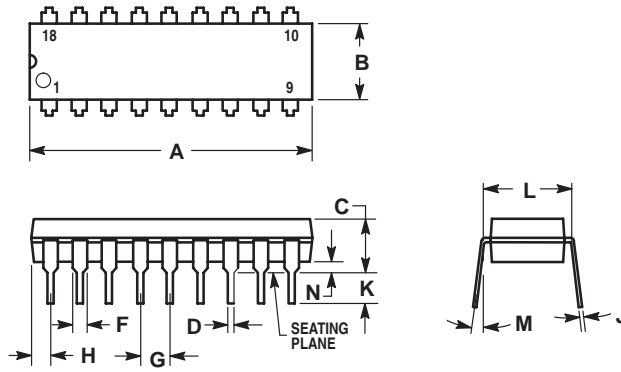



NOTES:

1. POSITIONAL TOLERANCE OF LEADS (D), SHALL BE WITHIN 0.25 (0.010) AT MAXIMUM MATERIAL CONDITION, IN RELATION TO SEATING PLANE AND EACH OTHER.
2. DIMENSION L TO CENTER OF LEADS WHEN FORMED PARALLEL.
3. DIMENSION B DOES NOT INCLUDE MOLD FLASH.

| DIM | MILLIMETERS |       | INCHES    |       |
|-----|-------------|-------|-----------|-------|
|     | MIN         | MAX   | MIN       | MAX   |
| A   | 22.22       | 23.24 | 0.875     | 0.915 |
| B   | 6.10        | 6.60  | 0.240     | 0.260 |
| C   | 3.56        | 4.57  | 0.140     | 0.180 |
| D   | 0.36        | 0.56  | 0.014     | 0.022 |
| F   | 1.27        | 1.78  | 0.050     | 0.070 |
| G   | 2.54 BSC    |       | 0.100 BSC |       |
| H   | 1.02        | 1.52  | 0.040     | 0.060 |
| J   | 0.20        | 0.30  | 0.008     | 0.012 |
| K   | 2.92        | 3.43  | 0.115     | 0.135 |
| L   | 7.62 BSC    |       | 0.300 BSC |       |
| M   | 0°          | 15°   | 0°        | 15°   |
| N   | 0.51        | 1.02  | 0.020     | 0.040 |

**P SUFFIX**  
**CASE 710-02**  
 Plastic Package  
 ISSUE B

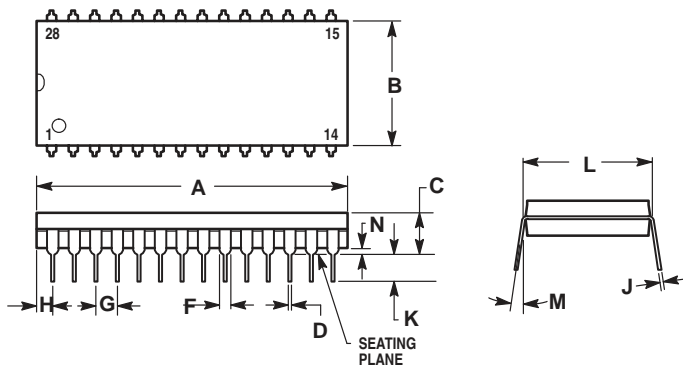



NOTES:

1. POSITIONAL TOLERANCE OF LEADS (D), SHALL BE WITHIN 0.25 (0.010) AT MAXIMUM MATERIAL CONDITION, IN RELATION TO SEATING PLANE AND EACH OTHER.
2. DIMENSION L TO CENTER OF LEADS WHEN FORMED PARALLEL.
3. DIMENSION B DOES NOT INCLUDE MOLD FLASH.

| DIM | MILLIMETERS |       | INCHES    |       |
|-----|-------------|-------|-----------|-------|
|     | MIN         | MAX   | MIN       | MAX   |
| A   | 36.45       | 37.21 | 1.435     | 1.465 |
| B   | 13.72       | 14.22 | 0.540     | 0.560 |
| C   | 3.94        | 5.08  | 0.155     | 0.200 |
| D   | 0.36        | 0.56  | 0.014     | 0.022 |
| F   | 1.02        | 1.52  | 0.040     | 0.060 |
| G   | 2.54 BSC    |       | 0.100 BSC |       |
| H   | 1.65        | 2.16  | 0.065     | 0.085 |
| J   | 0.20        | 0.38  | 0.008     | 0.015 |
| K   | 2.92        | 3.43  | 0.115     | 0.135 |
| L   | 15.24 BSC   |       | 0.600 BSC |       |
| M   | 0°          | 15°   | 0°        | 15°   |
| N   | 0.51        | 1.02  | 0.020     | 0.040 |

**P SUFFIX**  
**CASE 711-03**  
 Plastic Package  
 ISSUE C

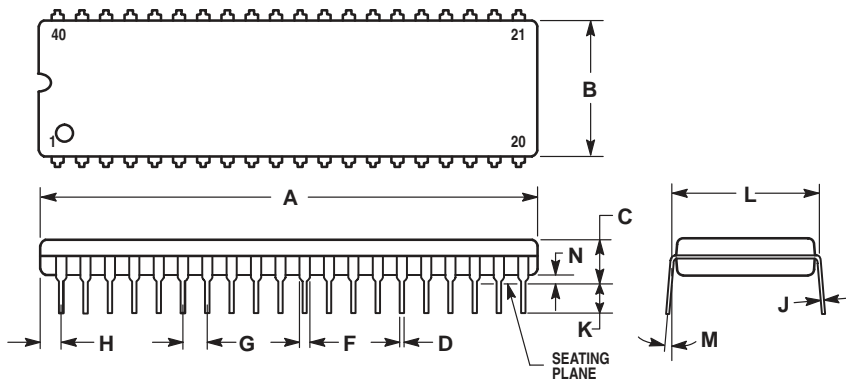



NOTES:

1. POSITIONAL TOLERANCE OF LEADS (D), SHALL BE WITHIN 0.25 (0.010) AT MAXIMUM MATERIAL CONDITION, IN RELATION TO SEATING PLANE AND EACH OTHER.
2. DIMENSION L TO CENTER OF LEADS WHEN FORMED PARALLEL.
3. DIMENSION B DOES NOT INCLUDE MOLD FLASH.

| DIM | MILLIMETERS |       | INCHES    |       |
|-----|-------------|-------|-----------|-------|
|     | MIN         | MAX   | MIN       | MAX   |
| A   | 51.69       | 52.45 | 2.035     | 2.065 |
| B   | 13.72       | 14.22 | 0.540     | 0.560 |
| C   | 3.94        | 5.08  | 0.155     | 0.200 |
| D   | 0.36        | 0.56  | 0.014     | 0.022 |
| F   | 1.02        | 1.52  | 0.040     | 0.060 |
| G   | 2.54 BSC    |       | 0.100 BSC |       |
| H   | 1.65        | 2.16  | 0.065     | 0.085 |
| J   | 0.20        | 0.38  | 0.008     | 0.015 |
| K   | 2.92        | 3.43  | 0.115     | 0.135 |
| L   | 15.24 BSC   |       | 0.600 BSC |       |
| M   | 0°          | 15°   | 0°        | 15°   |
| N   | 0.51        | 1.02  | 0.020     | 0.040 |



**F, P, P-3 SUFFIX**  
**CASE 724-03**  
 Plastic Package  
 (NDIP-24)  
 ISSUE D

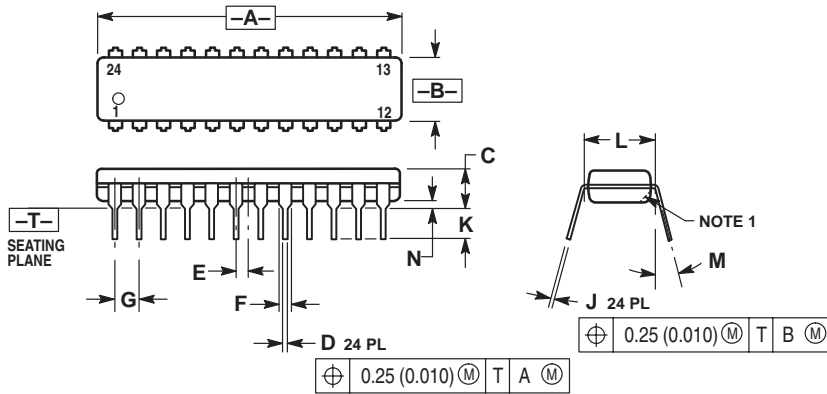

- NOTES:
1. CHAMFERED CONTOUR OPTIONAL.
  2. DIMENSION L TO CENTER OF LEADS WHEN FORMED PARALLEL.
  3. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
  4. CONTROLLING DIMENSION: INCH.

| DIM | INCHES    |       | MILLIMETERS |       |
|-----|-----------|-------|-------------|-------|
|     | MIN       | MAX   | MIN         | MAX   |
| A   | 1.230     | 1.265 | 31.25       | 32.13 |
| B   | 0.250     | 0.270 | 6.35        | 6.85  |
| C   | 0.145     | 0.175 | 3.69        | 4.44  |
| D   | 0.015     | 0.020 | 0.38        | 0.51  |
| E   | 0.050 BSC |       | 1.27 BSC    |       |
| F   | 0.040     | 0.060 | 1.02        | 1.52  |
| G   | 0.100 BSC |       | 2.54 BSC    |       |
| J   | 0.007     | 0.012 | 0.18        | 0.30  |
| K   | 0.110     | 0.140 | 2.80        | 3.55  |
| L   | 0.300 BSC |       | 7.62 BSC    |       |
| M   | 0°        | 15°   | 0°          | 15°   |
| N   | 0.020     | 0.040 | 0.51        | 1.01  |


**H, P, DP SUFFIX**  
**CASE 738-03**  
 Plastic Package  
 ISSUE E

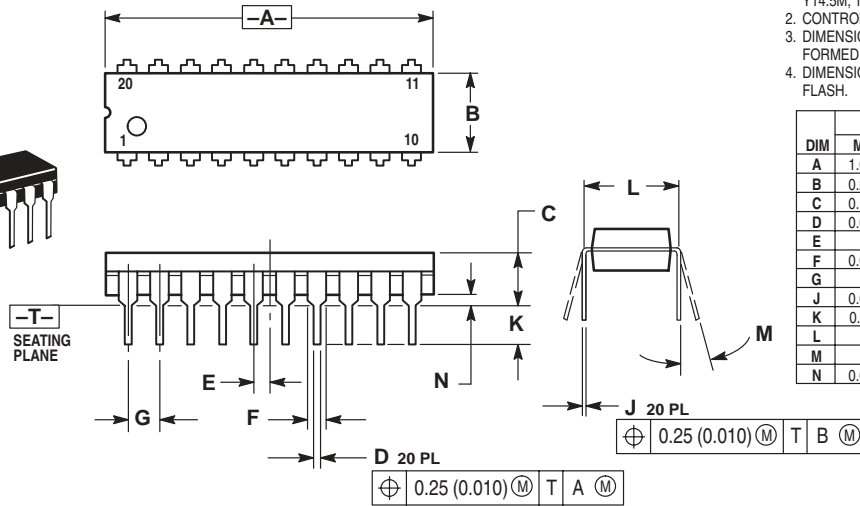

- NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
  2. CONTROLLING DIMENSION: INCH.
  3. DIMENSION L TO CENTER OF LEAD WHEN FORMED PARALLEL.
  4. DIMENSION B DOES NOT INCLUDE MOLD FLASH.

| DIM | INCHES    |       | MILLIMETERS |       |
|-----|-----------|-------|-------------|-------|
|     | MIN       | MAX   | MIN         | MAX   |
| A   | 1.010     | 1.070 | 25.66       | 27.17 |
| B   | 0.240     | 0.260 | 6.10        | 6.60  |
| C   | 0.150     | 0.180 | 3.81        | 4.57  |
| D   | 0.015     | 0.022 | 0.39        | 0.55  |
| E   | 0.050 BSC |       | 1.27 BSC    |       |
| F   | 0.050     | 0.070 | 1.27        | 1.77  |
| G   | 0.100 BSC |       | 2.54 BSC    |       |
| J   | 0.008     | 0.015 | 0.21        | 0.38  |
| K   | 0.110     | 0.140 | 2.80        | 3.55  |
| L   | 0.300 BSC |       | 7.62 BSC    |       |
| M   | 0°        | 15°   | 0°          | 15°   |
| N   | 0.020     | 0.040 | 0.51        | 1.01  |



**D, D1, D2 SUFFIX**  
**CASE 751-05**  
 Plastic Package  
 (SO-8, SOP-8)  
 ISSUE R

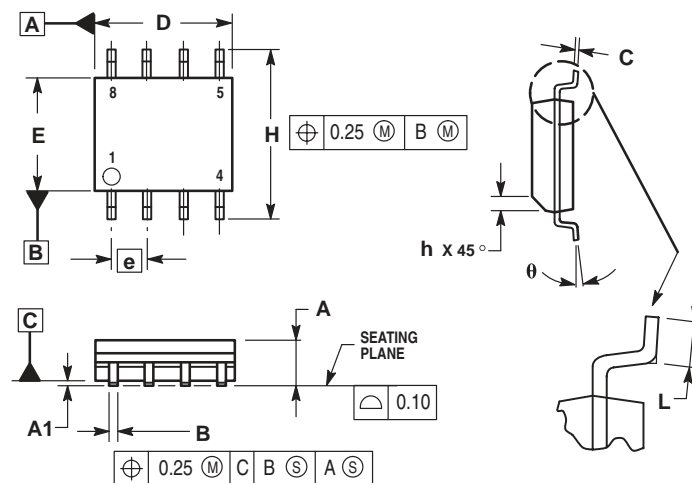

- NOTES:
1. DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 1994.
  2. DIMENSIONS ARE IN MILLIMETERS.
  3. DIMENSION D AND E DO NOT INCLUDE MOLD PROTRUSION.
  4. MAXIMUM MOLD PROTRUSION 0.15 PER SIDE.
  5. DIMENSION B DOES NOT INCLUDE MOLD PROTRUSION. ALLOWABLE DAMBAR PROTRUSION SHALL BE 0.127 TOTAL IN EXCESS OF THE B DIMENSION AT MAXIMUM MATERIAL CONDITION.

| DIM | MILLIMETERS |      |
|-----|-------------|------|
|     | MIN         | MAX  |
| A   | 1.35        | 1.75 |
| A1  | 0.10        | 0.25 |
| B   | 0.35        | 0.49 |
| C   | 0.18        | 0.25 |
| D   | 4.80        | 5.00 |
| E   | 3.80        | 4.00 |
| e   | 1.27 BSC    |      |
| H   | 5.80        | 6.20 |
| h   | 0.25        | 0.50 |
| L   | 0.40        | 1.25 |
| θ   | 0°          | 7°   |



**D SUFFIX**  
**CASE 751A-03**  
 Plastic Package  
 (SO-14)  
 ISSUE F

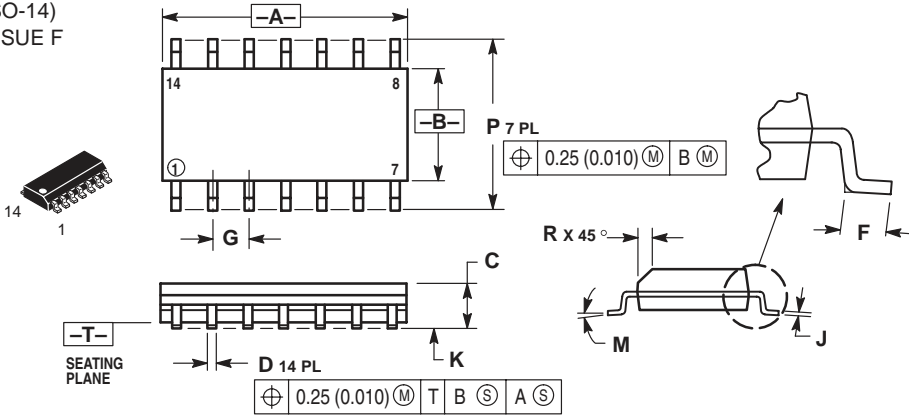

- NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
  2. CONTROLLING DIMENSION: MILLIMETER.
  3. DIMENSIONS A AND B DO NOT INCLUDE MOLD PROTRUSION.
  4. MAXIMUM MOLD PROTRUSION 0.15 (0.006) PER SIDE.
  5. DIMENSION D DOES NOT INCLUDE DAMBAR PROTRUSION. ALLOWABLE DAMBAR PROTRUSION SHALL BE 0.127 (0.005) TOTAL IN EXCESS OF THE D DIMENSION AT MAXIMUM MATERIAL CONDITION.

| DIM | MILLIMETERS |      | INCHES    |       |
|-----|-------------|------|-----------|-------|
|     | MIN         | MAX  | MIN       | MAX   |
| A   | 8.55        | 8.75 | 0.337     | 0.344 |
| B   | 3.80        | 4.00 | 0.150     | 0.157 |
| C   | 1.35        | 1.75 | 0.054     | 0.068 |
| D   | 0.35        | 0.49 | 0.014     | 0.019 |
| F   | 0.40        | 1.25 | 0.016     | 0.049 |
| G   | 1.27 BSC    |      | 0.050 BSC |       |
| J   | 0.19        | 0.25 | 0.008     | 0.009 |
| K   | 0.10        | 0.25 | 0.004     | 0.009 |
| M   | 0°          | 7°   | 0°        | 7°    |
| P   | 5.80        | 6.20 | 0.228     | 0.244 |
| R   | 0.25        | 0.50 | 0.010     | 0.019 |



**D SUFFIX**  
**CASE 751B-05**  
 Plastic Package  
 (SO-16)  
 ISSUE J

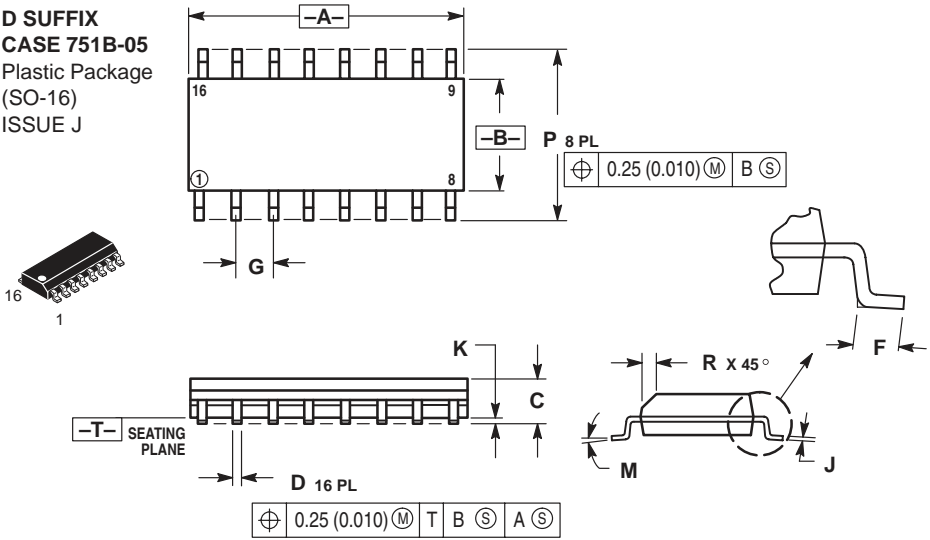

- NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
  2. CONTROLLING DIMENSION: MILLIMETER.
  3. DIMENSIONS A AND B DO NOT INCLUDE MOLD PROTRUSION.
  4. MAXIMUM MOLD PROTRUSION 0.15 (0.006) PER SIDE.
  5. DIMENSION D DOES NOT INCLUDE DAMBAR PROTRUSION. ALLOWABLE DAMBAR PROTRUSION SHALL BE 0.127 (0.005) TOTAL IN EXCESS OF THE D DIMENSION AT MAXIMUM MATERIAL CONDITION.

| DIM | MILLIMETERS |       | INCHES    |       |
|-----|-------------|-------|-----------|-------|
|     | MIN         | MAX   | MIN       | MAX   |
| A   | 9.80        | 10.00 | 0.386     | 0.393 |
| B   | 3.80        | 4.00  | 0.150     | 0.157 |
| C   | 1.35        | 1.75  | 0.054     | 0.068 |
| D   | 0.35        | 0.49  | 0.014     | 0.019 |
| F   | 0.40        | 1.25  | 0.016     | 0.049 |
| G   | 1.27 BSC    |       | 0.050 BSC |       |
| J   | 0.19        | 0.25  | 0.008     | 0.009 |
| K   | 0.10        | 0.25  | 0.004     | 0.009 |
| M   | 0°          | 7°    | 0°        | 7°    |
| P   | 5.80        | 6.20  | 0.229     | 0.244 |
| R   | 0.25        | 0.50  | 0.010     | 0.019 |



**DW, FP SUFFIX**  
**CASE 751D-04**  
 Plastic Package  
 (SO-20L, SO-20)  
 ISSUE E

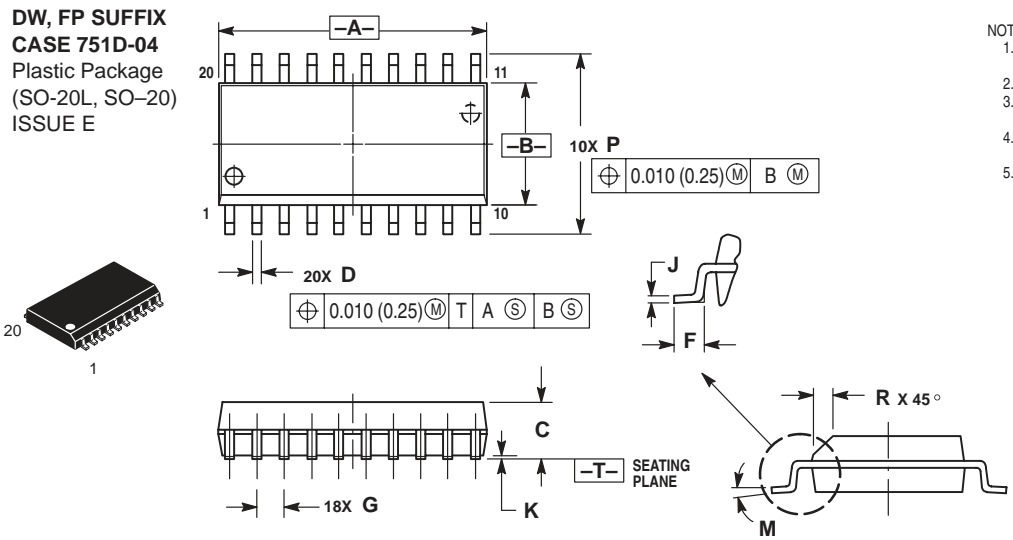

- NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
  2. CONTROLLING DIMENSION: MILLIMETER.
  3. DIMENSIONS A AND B DO NOT INCLUDE MOLD PROTRUSION.
  4. MAXIMUM MOLD PROTRUSION 0.150 (0.006) PER SIDE.
  5. DIMENSION D DOES NOT INCLUDE DAMBAR PROTRUSION. ALLOWABLE DAMBAR PROTRUSION SHALL BE 0.13 (0.005) TOTAL IN EXCESS OF D DIMENSION AT MAXIMUM MATERIAL CONDITION.

| DIM | MILLIMETERS |       | INCHES    |       |
|-----|-------------|-------|-----------|-------|
|     | MIN         | MAX   | MIN       | MAX   |
| A   | 12.65       | 12.95 | 0.499     | 0.510 |
| B   | 7.40        | 7.60  | 0.292     | 0.299 |
| C   | 2.35        | 2.65  | 0.093     | 0.104 |
| D   | 0.35        | 0.49  | 0.014     | 0.019 |
| F   | 0.50        | 0.90  | 0.020     | 0.035 |
| G   | 1.27 BSC    |       | 0.050 BSC |       |
| J   | 0.25        | 0.32  | 0.010     | 0.012 |
| K   | 0.10        | 0.25  | 0.004     | 0.009 |
| M   | 0°          | 7°    | 0°        | 7°    |
| P   | 10.05       | 10.55 | 0.395     | 0.415 |
| R   | 0.25        | 0.75  | 0.010     | 0.029 |



**DW SUFFIX**  
**CASE 751E-04**  
 Plastic Package  
 (SO-24L,  
 SOP (16+4+4)L)  
 ISSUE E

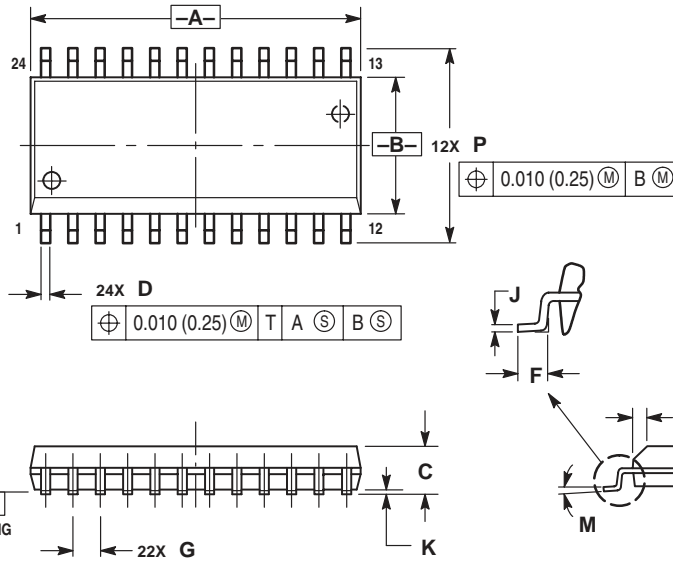

- NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
  2. CONTROLLING DIMENSION: MILLIMETER.
  3. DIMENSIONS A AND B DO NOT INCLUDE MOLD PROTRUSION.
  4. MAXIMUM MOLD PROTRUSION 0.15 (0.006) PER SIDE.
  5. DIMENSION D DOES NOT INCLUDE DAMBAR PROTRUSION. ALLOWABLE DAMBAR PROTRUSION SHALL BE 0.13 (0.005) TOTAL IN EXCESS OF D DIMENSION AT MAXIMUM MATERIAL CONDITION.

| DIM | MILLIMETERS |       | INCHES    |       |
|-----|-------------|-------|-----------|-------|
|     | MIN         | MAX   | MIN       | MAX   |
| A   | 15.25       | 15.54 | 0.601     | 0.612 |
| B   | 7.40        | 7.60  | 0.292     | 0.299 |
| C   | 2.35        | 2.65  | 0.093     | 0.104 |
| D   | 0.35        | 0.49  | 0.014     | 0.019 |
| F   | 0.41        | 0.90  | 0.016     | 0.035 |
| G   | 1.27 BSC    |       | 0.050 BSC |       |
| J   | 0.23        | 0.32  | 0.009     | 0.013 |
| K   | 0.13        | 0.29  | 0.005     | 0.011 |
| M   | 0°          | 8°    | 0°        | 8°    |
| P   | 10.05       | 10.55 | 0.395     | 0.415 |
| R   | 0.25        | 0.75  | 0.010     | 0.029 |



**DW SUFFIX**  
**CASE 751F-04**  
 Plastic Package  
 (SO-28L, SOIC-28)  
 ISSUE E

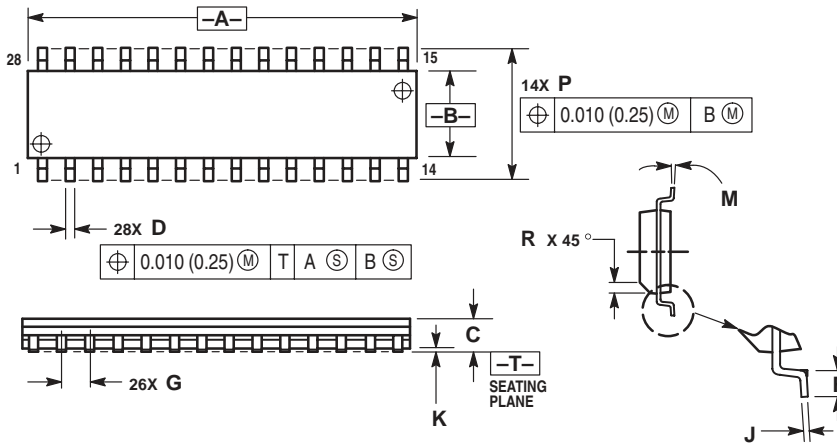

- NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
  2. CONTROLLING DIMENSION: MILLIMETER.
  3. DIMENSION A AND B DO NOT INCLUDE MOLD PROTRUSION.
  4. MAXIMUM MOLD PROTRUSION 0.15 (0.006) PER SIDE.
  5. DIMENSION D DOES NOT INCLUDE DAMBAR PROTRUSION. ALLOWABLE DAMBAR PROTRUSION SHALL BE 0.13 (0.005) TOTAL IN EXCESS OF D DIMENSION AT MAXIMUM MATERIAL CONDITION.

| DIM | MILLIMETERS |       | INCHES    |       |
|-----|-------------|-------|-----------|-------|
|     | MIN         | MAX   | MIN       | MAX   |
| A   | 17.80       | 18.05 | 0.701     | 0.711 |
| B   | 7.40        | 7.60  | 0.292     | 0.299 |
| C   | 2.35        | 2.65  | 0.093     | 0.104 |
| D   | 0.35        | 0.49  | 0.014     | 0.019 |
| F   | 0.41        | 0.90  | 0.016     | 0.035 |
| G   | 1.27 BSC    |       | 0.050 BSC |       |
| J   | 0.23        | 0.32  | 0.009     | 0.013 |
| K   | 0.13        | 0.29  | 0.005     | 0.011 |
| M   | 0°          | 8°    | 0°        | 8°    |
| P   | 10.01       | 10.55 | 0.395     | 0.415 |
| R   | 0.25        | 0.75  | 0.010     | 0.029 |



**DW SUFFIX**  
**CASE 751G-02**  
 Plastic Package  
 (SO-16L, SOP-16L,  
 SOP-8+8L)  
 ISSUE A

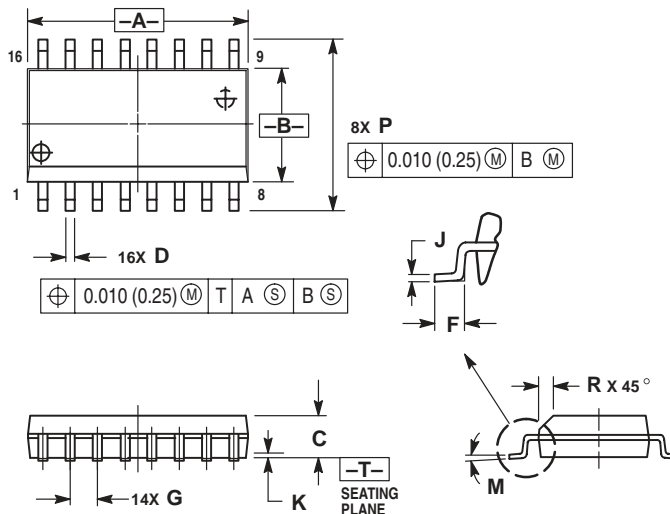

- NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
  2. CONTROLLING DIMENSION: MILLIMETER.
  3. DIMENSIONS A AND B DO NOT INCLUDE MOLD PROTRUSION.
  4. MAXIMUM MOLD PROTRUSION 0.15 (0.006) PER SIDE.
  5. DIMENSION D DOES NOT INCLUDE DAMBAR PROTRUSION. ALLOWABLE DAMBAR PROTRUSION SHALL BE 0.13 (0.005) TOTAL IN EXCESS OF D DIMENSION AT MAXIMUM MATERIAL CONDITION.

| DIM | MILLIMETERS |       | INCHES    |       |
|-----|-------------|-------|-----------|-------|
|     | MIN         | MAX   | MIN       | MAX   |
| A   | 10.15       | 10.45 | 0.400     | 0.411 |
| B   | 7.40        | 7.60  | 0.292     | 0.299 |
| C   | 2.35        | 2.65  | 0.093     | 0.104 |
| D   | 0.35        | 0.49  | 0.014     | 0.019 |
| F   | 0.50        | 0.90  | 0.020     | 0.035 |
| G   | 1.27 BSC    |       | 0.050 BSC |       |
| J   | 0.25        | 0.32  | 0.010     | 0.012 |
| K   | 0.10        | 0.25  | 0.004     | 0.009 |
| M   | 0°          | 7°    | 0°        | 7°    |
| P   | 10.05       | 10.55 | 0.395     | 0.415 |
| R   | 0.25        | 0.75  | 0.010     | 0.029 |



**D SUFFIX**  
**CASE 751K-01**  
 Plastic Package  
 (SO-16)  
 ISSUE O

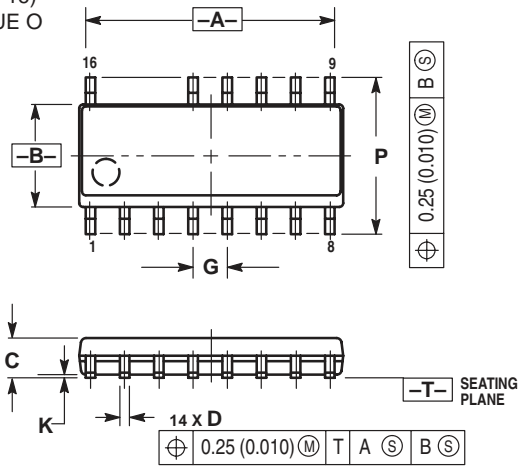

- NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
  2. CONTROLLING DIMENSION: MILLIMETER.
  3. DIMENSIONS A AND B DO NOT INCLUDE MOLD PROTRUSION.
  4. MAXIMUM MOLD PROTRUSION 0.15 (0.006) PER SIDE.
  5. DIMENSION D DOES NOT INCLUDE DAMBAR PROTRUSION. ALLOWABLE DAMBAR PROTRUSION SHALL BE 0.127 (0.005) TOTAL IN EXCESS OF THE D DIMENSION AT MAXIMUM MATERIAL CONDITION.

| DIM | MILLIMETERS |       | INCHES    |       |
|-----|-------------|-------|-----------|-------|
|     | MIN         | MAX   | MIN       | MAX   |
| A   | 9.80        | 10.00 | 0.368     | 0.393 |
| B   | 3.80        | 4.00  | 0.150     | 0.157 |
| C   | 1.35        | 1.75  | 0.054     | 0.068 |
| D   | 0.35        | 0.49  | 0.014     | 0.019 |
| F   | 0.40        | 1.25  | 0.016     | 0.049 |
| G   | 1.27 BSC    |       | 0.050 BSC |       |
| J   | 0.19        | 0.25  | 0.008     | 0.009 |
| K   | 0.10        | 0.25  | 0.004     | 0.009 |
| M   | 0°          | 7°    | 0°        | 7°    |
| P   | 5.80        | 6.20  | 0.229     | 0.244 |
| R   | 0.25        | 0.50  | 0.010     | 0.019 |



**DW SUFFIX**  
**CASE 751N-01**  
 Plastic Package  
 (SOP-16L)  
 ISSUE O

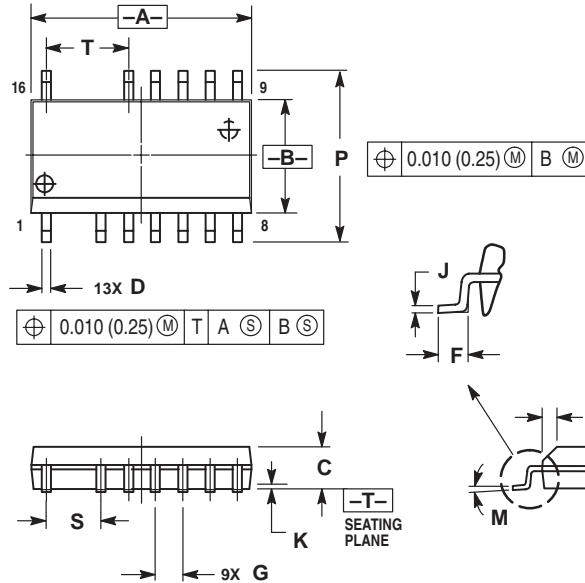

- NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
  2. CONTROLLING DIMENSION: MILLIMETER.
  3. DIMENSIONS A AND B DO NOT INCLUDE MOLD PROTRUSION.
  4. MAXIMUM MOLD PROTRUSION 0.15 (0.006) PER SIDE.
  5. DIMENSION D DOES NOT INCLUDE DAMBAR PROTRUSION. ALLOWABLE DAMBAR PROTRUSION SHALL BE 0.13 (0.005) TOTAL IN EXCESS OF D DIMENSION AT MAXIMUM MATERIAL CONDITION.

| DIM | MILLIMETERS |       | INCHES    |       |
|-----|-------------|-------|-----------|-------|
|     | MIN         | MAX   | MIN       | MAX   |
| A   | 10.15       | 10.45 | 0.400     | 0.411 |
| B   | 7.40        | 7.60  | 0.292     | 0.299 |
| C   | 2.35        | 2.65  | 0.093     | 0.104 |
| D   | 0.35        | 0.49  | 0.014     | 0.019 |
| F   | 0.50        | 0.90  | 0.020     | 0.035 |
| G   | 1.27 BSC    |       | 0.050 BSC |       |
| J   | 0.25        | 0.32  | 0.010     | 0.012 |
| K   | 0.10        | 0.25  | 0.004     | 0.009 |
| M   | 0°          | 7°    | 0°        | 7°    |
| P   | 10.05       | 10.55 | 0.395     | 0.415 |
| R   | 0.25        | 0.75  | 0.010     | 0.029 |
| S   | 2.54 BSC    |       | 0.100 BSC |       |
| T   | 3.81 BSC    |       | 0.150 BSC |       |



**CASE 762-01**  
 Plastic Medium Power Package  
 (SIP-9)  
 ISSUE C

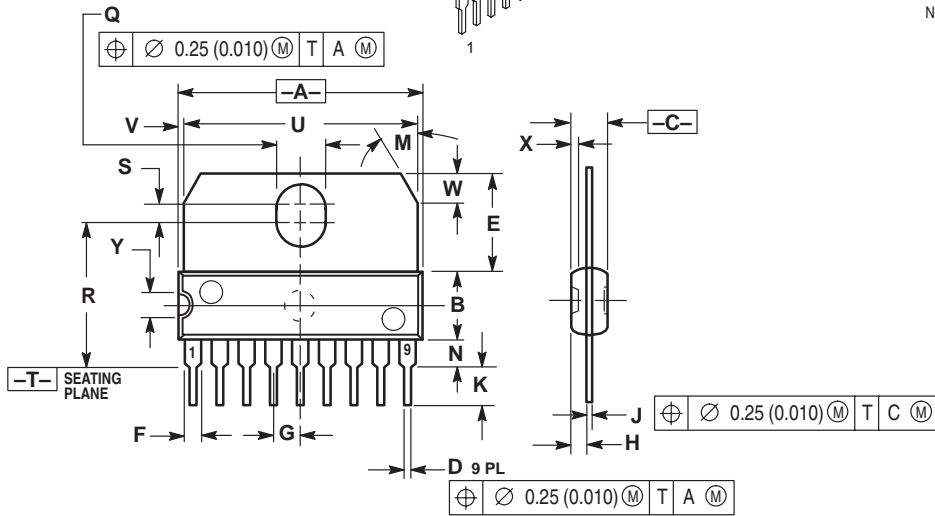

- NOTES:  
 1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5, 1982.  
 2. CONTROLLING DIMENSION: MILLIMETER.

| DIM | MILLIMETERS |       | INCHES    |       |
|-----|-------------|-------|-----------|-------|
|     | MIN         | MAX   | MIN       | MAX   |
| A   | 22.40       | 23.00 | 0.873     | 0.897 |
| B   | 6.40        | 6.60  | 0.252     | 0.260 |
| C   | 3.45        | 3.65  | 0.135     | 1.143 |
| D   | 0.40        | 0.55  | 0.015     | 0.021 |
| E   | 9.35        | 9.60  | 0.368     | 0.377 |
| F   | 1.40        | 1.60  | 0.055     | 0.062 |
| G   | 2.54 BSC    |       | 0.100 BSC |       |
| H   | 1.51        | 1.71  | 0.059     | 0.067 |
| J   | 0.360       | 0.400 | 0.014     | 0.015 |
| K   | 3.95        | 4.20  | 0.155     | 0.165 |
| M   | 30° BSC     |       | 30° BSC   |       |
| N   | 2.50        | 2.70  | 0.099     | 0.106 |
| Q   | 3.15        | 3.45  | 0.124     | 0.135 |
| R   | 13.60       | 13.90 | 0.535     | 0.547 |
| S   | 1.65        | 1.95  | 0.064     | 0.076 |
| U   | 22.00       | 22.20 | 0.866     | 0.874 |
| V   | 0.55        | 0.75  | 0.021     | 0.029 |
| W   | 2.89 BSC    |       | 0.113 BSC |       |
| X   | 0.65        | 0.75  | 0.025     | 0.029 |
| Y   | 2.70        | 2.80  | 0.106     | 0.110 |






**FN SUFFIX**  
**CASE 775-02**  
 Plastic Package  
 (PLCC-20)  
 ISSUE C

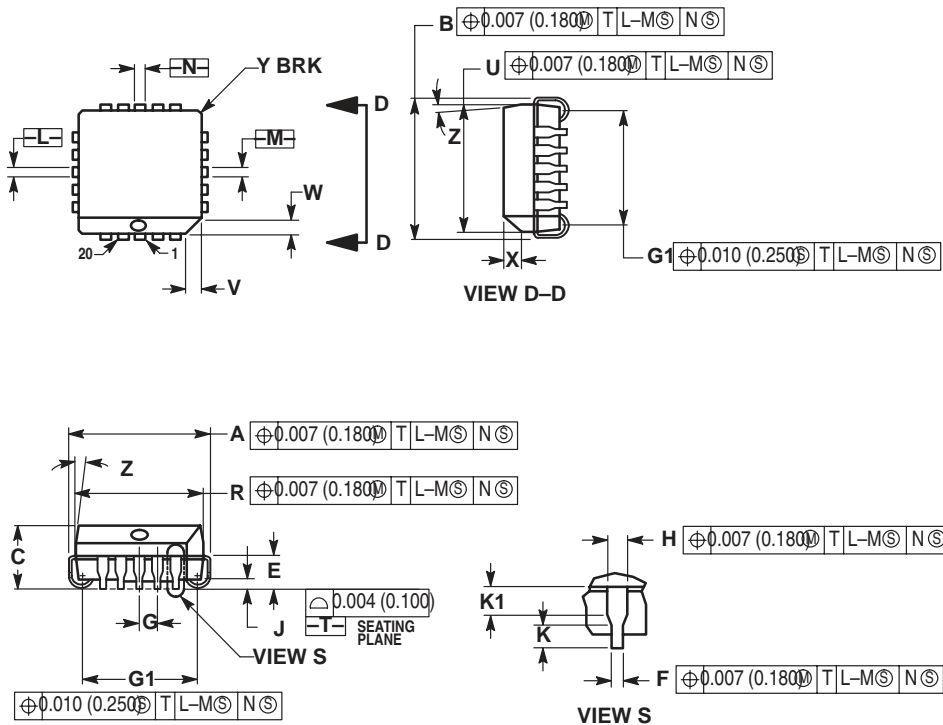

- NOTES:  
 1. DATUMS -L-, -M-, AND -N- DETERMINED WHERE TOP OF LEAD SHOULDER EXITS PLASTIC BODY AT MOLD PARTING LINE.  
 2. DIMENSION G1, TRUE POSITION TO BE MEASURED AT DATUM -T-, SEATING PLANE.  
 3. DIMENSIONS R AND U DO NOT INCLUDE MOLD FLASH. ALLOWABLE MOLD FLASH IS 0.010 (0.250) PER SIDE.  
 4. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.  
 5. CONTROLLING DIMENSION: INCH.  
 6. THE PACKAGE TOP MAY BE SMALLER THAN THE PACKAGE BOTTOM BY UP TO 0.012 (0.300). DIMENSIONS R AND U ARE DETERMINED AT THE OUTERMOST EXTREMES OF THE PLASTIC BODY EXCLUSIVE OF MOLD FLASH, TIE BAR BURRS, GATE BURRS AND INTERLEAD FLASH, BUT INCLUDING ANY MISMATCH BETWEEN THE TOP AND BOTTOM OF THE PLASTIC BODY.  
 7. DIMENSION H DOES NOT INCLUDE DAMBAR PROTRUSION OR INTRUSION. THE DAMBAR PROTRUSION(S) SHALL NOT CAUSE THE H DIMENSION TO BE GREATER THAN 0.037 (0.940). THE DAMBAR INTRUSION(S) SHALL NOT CAUSE THE H DIMENSION TO BE SMALLER THAN 0.025 (0.635).

| DIM | INCHES    |       | MILLIMETERS |       |
|-----|-----------|-------|-------------|-------|
|     | MIN       | MAX   | MIN         | MAX   |
| A   | 0.385     | 0.395 | 9.78        | 10.03 |
| B   | 0.385     | 0.395 | 9.78        | 10.03 |
| C   | 0.165     | 0.180 | 4.20        | 4.57  |
| E   | 0.090     | 0.110 | 2.29        | 2.79  |
| F   | 0.013     | 0.019 | 0.33        | 0.48  |
| G   | 0.050 BSC |       | 1.27 BSC    |       |
| H   | 0.026     | 0.032 | 0.66        | 0.81  |
| J   | 0.020     | —     | 0.51        | —     |
| K   | 0.025     | —     | 0.64        | —     |
| R   | 0.350     | 0.356 | 8.89        | 9.04  |
| U   | 0.350     | 0.356 | 8.89        | 9.04  |
| V   | 0.042     | 0.048 | 1.07        | 1.21  |
| W   | 0.042     | 0.048 | 1.07        | 1.21  |
| X   | 0.042     | 0.056 | 1.07        | 1.42  |
| Y   | —         | 0.020 | —           | 0.50  |
| Z   | 2°        | 10°   | —           | 10°   |
| G1  | 0.310     | 0.330 | 7.88        | 8.38  |
| K1  | 0.040     | —     | 1.02        | —     |

**FN SUFFIX**  
**CASE 776-02**  
 Plastic Package  
 (PLCC-28)  
 ISSUE D

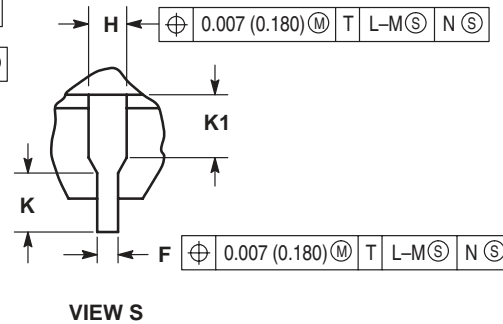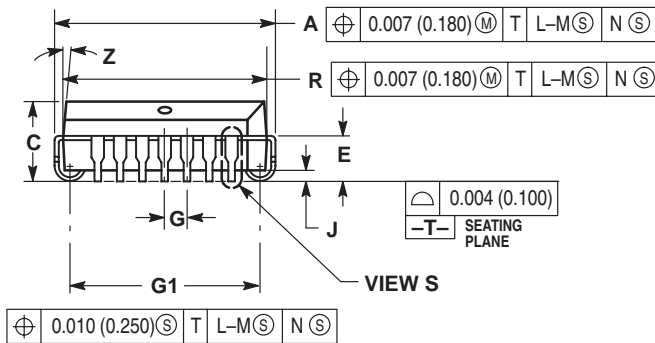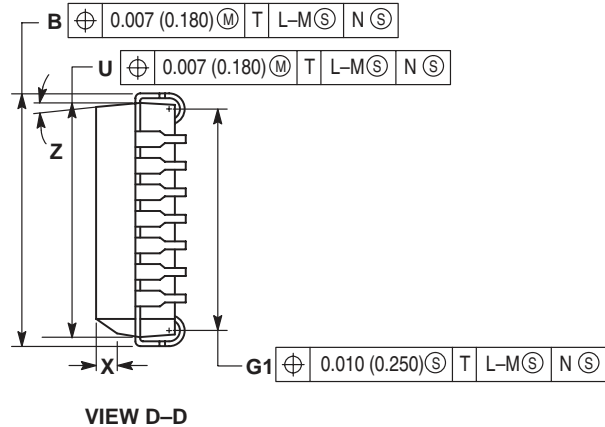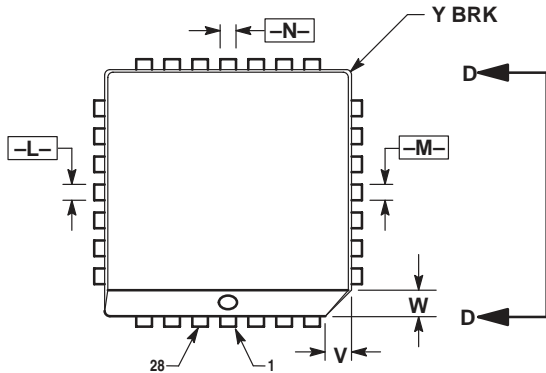


**NOTES:**

- DATUMS -L-, -M-, AND -N- DETERMINED WHERE TOP OF LEAD SHOULDER EXITS PLASTIC BODY AT MOLD PARTING LINE.
- DIMENSION G1, TRUE POSITION TO BE MEASURED AT DATUM -T-, SEATING PLANE.
- DIMENSIONS R AND U DO NOT INCLUDE MOLD FLASH. ALLOWABLE MOLD FLASH IS 0.010 (0.250) PER SIDE.
- DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
- CONTROLLING DIMENSION: INCH.
- THE PACKAGE TOP MAY BE SMALLER THAN THE PACKAGE BOTTOM BY UP TO 0.012 (0.300). DIMENSIONS R AND U ARE DETERMINED AT THE OUTERMOST EXTREMES OF THE PLASTIC BODY EXCLUSIVE OF MOLD FLASH, TIE BAR BURRS, GATE BURRS AND INTERLEAD FLASH, BUT INCLUDING ANY MISMATCH BETWEEN THE TOP AND BOTTOM OF THE PLASTIC BODY.
- DIMENSION H DOES NOT INCLUDE DAMBAR PROTRUSION OR INTRUSION. THE DAMBAR PROTRUSION(S) SHALL NOT CAUSE THE H DIMENSION TO BE GREATER THAN 0.037 (0.940). THE DAMBAR INTRUSION(S) SHALL NOT CAUSE THE H DIMENSION TO BE SMALLER THAN 0.025 (0.635).

| DIM | INCHES    |       | MILLIMETERS |       |
|-----|-----------|-------|-------------|-------|
|     | MIN       | MAX   | MIN         | MAX   |
| A   | 0.485     | 0.495 | 12.32       | 12.57 |
| B   | 0.485     | 0.495 | 12.32       | 12.57 |
| C   | 0.165     | 0.180 | 4.20        | 4.57  |
| E   | 0.090     | 0.110 | 2.29        | 2.79  |
| F   | 0.013     | 0.019 | 0.33        | 0.48  |
| G   | 0.050 BSC |       | 1.27 BSC    |       |
| H   | 0.026     | 0.032 | 0.66        | 0.81  |
| J   | 0.020     | —     | 0.51        | —     |
| K   | 0.025     | —     | 0.64        | —     |
| R   | 0.450     | 0.456 | 11.43       | 11.58 |
| U   | 0.450     | 0.456 | 11.43       | 11.58 |
| V   | 0.042     | 0.048 | 1.07        | 1.21  |
| W   | 0.042     | 0.048 | 1.07        | 1.21  |
| X   | 0.042     | 0.056 | 1.07        | 1.42  |
| Y   | —         | 0.020 | —           | 0.50  |
| Z   | 2°        | 10°   | 2°          | 10°   |
| G1  | 0.410     | 0.430 | 10.42       | 10.92 |
| K1  | 0.040     | —     | 1.02        | —     |



**FN SUFFIX**  
**CASE 777-02**  
 Plastic Package  
 (PLCC)  
 ISSUE C

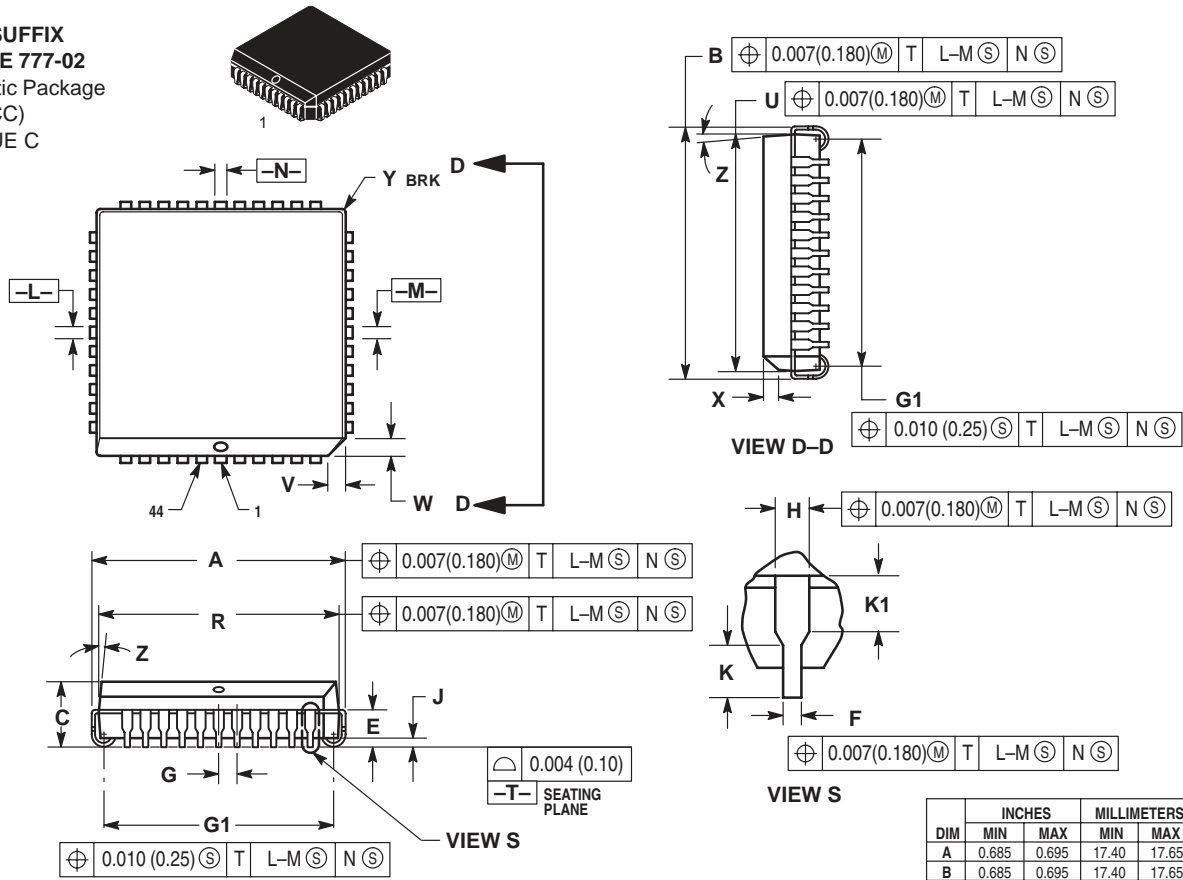


- NOTES:
- DATUMS -L-, -M-, AND -N- ARE DETERMINED WHERE TOP OF LEAD SHOULDER EXITS PLASTIC BODY AT MOLD PARTING LINE.
  - DIMENSION G1, TRUE POSITION TO BE MEASURED AT DATUM -T-, SEATING PLANE.
  - DIMENSIONS R AND U DO NOT INCLUDE MOLD FLASH. ALLOWABLE MOLD FLASH IS 0.010 (0.25) PER SIDE.
  - DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
  - CONTROLLING DIMENSION: INCH.

- THE PACKAGE TOP MAY BE SMALLER THAN THE PACKAGE BOTTOM BY UP TO 0.012 (0.300). DIMENSIONS R AND U ARE DETERMINED AT THE OUTERMOST EXTREMES OF THE PLASTIC BODY EXCLUSIVE OF MOLD FLASH, TIE BAR BURRS, GATE BURRS AND INTERLEAD FLASH, BUT INCLUDING ANY MISMATCH BETWEEN THE TOP AND BOTTOM OF THE PLASTIC BODY.
- DIMENSION H DOES NOT INCLUDE DAMBAR PROTRUSION OR INTRUSION. THE DAMBAR PROTRUSION(S) SHALL NOT CAUSE THE H DIMENSION TO BE GREATER THAN 0.037 (0.940). THE DAMBAR INTRUSION(S) SHALL NOT CAUSE THE H DIMENSION TO BE SMALLER THAN 0.025 (0.635).

| DIM | INCHES    |       | MILLIMETERS |       |
|-----|-----------|-------|-------------|-------|
|     | MIN       | MAX   | MIN         | MAX   |
| A   | 0.685     | 0.695 | 17.40       | 17.65 |
| B   | 0.685     | 0.695 | 17.40       | 17.65 |
| C   | 0.165     | 0.180 | 4.20        | 4.57  |
| E   | 0.090     | 0.110 | 2.29        | 2.79  |
| F   | 0.013     | 0.019 | 0.33        | 0.48  |
| G   | 0.050 BSC |       | 1.27 BSC    |       |
| H   | 0.026     | 0.032 | 0.66        | 0.81  |
| J   | 0.020     | —     | 0.51        | —     |
| K   | 0.025     | —     | 0.64        | —     |
| R   | 0.650     | 0.656 | 16.51       | 16.66 |
| U   | 0.650     | 0.656 | 16.51       | 16.66 |
| V   | 0.042     | 0.048 | 1.07        | 1.21  |
| W   | 0.042     | 0.048 | 1.07        | 1.21  |
| X   | 0.042     | 0.056 | 1.07        | 1.42  |
| Y   | —         | 0.020 | —           | 0.50  |
| Z   | 2°        | 10°   | 2°          | 10°   |
| G1  | 0.610     | 0.630 | 15.50       | 16.00 |
| K1  | 0.040     | —     | 1.02        | —     |

**M SUFFIX**  
**CASE 803C**  
 PRELIMINARY  
 Plastic Package



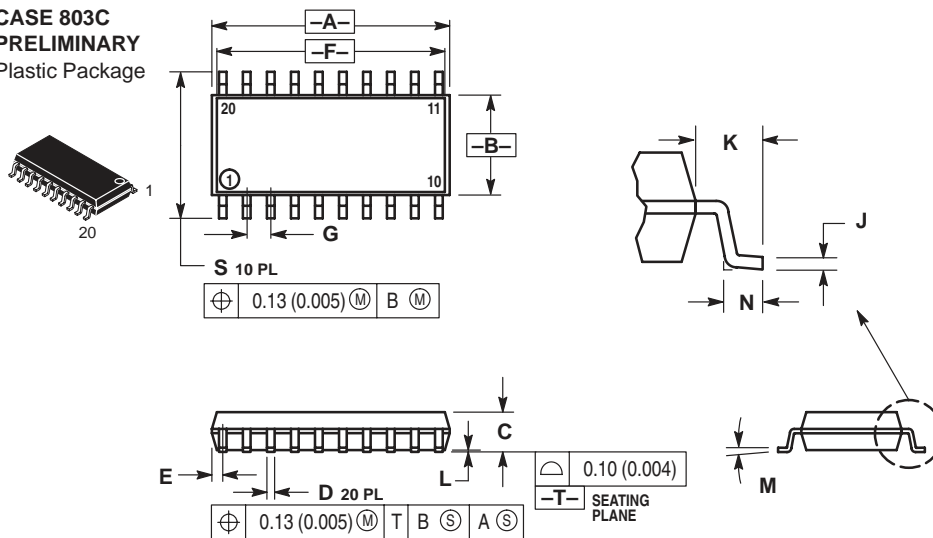


- NOTES:
- DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
  - CONTROLLING DIMENSION: MILLIMETER.
  - DIMENSIONS A AND B DO NOT INCLUDE MOLD PROTRUSION.
  - MAXIMUM MOLD PROTRUSION 0.15 (0.008) PER SIDE.
  - DIMENSION D DOES NOT INCLUDE DAMBAR PROTRUSION. ALLOWABLE DAMBAR PROTRUSION SHALL BE 0.13 (0.006) TOTAL IN EXCESS OF THE D DIMENSION AT MAXIMUM MATERIAL CONDITION.

| DIM | MILLIMETERS |       | INCHES |       |
|-----|-------------|-------|--------|-------|
|     | MIN         | MAX   | MIN    | MAX   |
| A   | 12.35       | 12.80 | 0.486  | 0.504 |
| B   | 5.10        | 5.45  | 0.201  | 0.215 |
| C   | 1.95        | 2.05  | 0.077  | 0.081 |
| D   | 0.35        | 0.50  | 0.014  | 0.020 |
| E   | —           | 0.81  | —      | 0.032 |
| F   | 12.40*      |       | 0.488* |       |
| G   | 1.15        | 1.39  | 0.045  | 0.055 |
| H   | 0.59        | 0.81  | 0.023  | 0.032 |
| J   | 0.18        | 0.27  | 0.007  | 0.011 |
| K   | 1.10        | 1.50  | 0.043  | 0.059 |
| L   | 0.05        | 0.20  | 0.001  | 0.008 |
| M   | 0°          | 10°   | 0°     | 10°   |
| N   | 0.50        | 0.85  | 0.020  | 0.033 |
| S   | 7.40        | 8.20  | 0.291  | 0.323 |

\*APPROXIMATE

**TV SUFFIX**  
**CASE 821C-04**  
 Plastic Package  
 (15-Pin ZIP)  
 ISSUE D

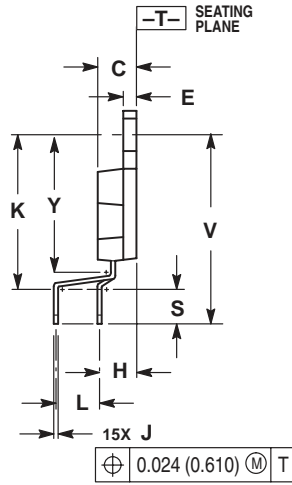
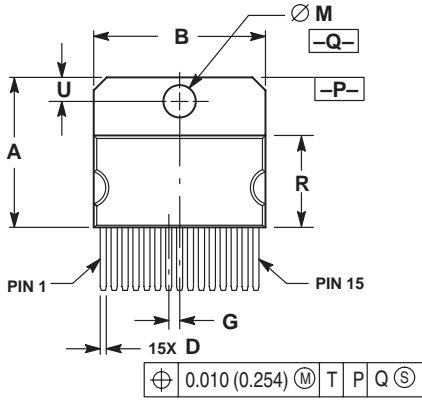



**NOTES:**

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.
3. DIMENSION R DOES NOT INCLUDE MOLD FLASH OR PROTRUSIONS.
4. DIMENSION B DOES NOT INCLUDE MOLD FLASH OR PROTRUSIONS.
5. MOLD FLASH OR PROTRUSIONS SHALL NOT EXCEED 0.010 (0.250).
6. DIMENSION D DOES NOT INCLUDE DAMBAR PROTRUSION. ALLOWABLE PROTRUSION SHALL BE 0.003 (0.076) TOTAL IN EXCESS OF THE D DIMENSION, AT MAXIMUM MATERIAL CONDITION.

| DIM | INCHES    |       | MILLIMETERS |        |
|-----|-----------|-------|-------------|--------|
|     | MIN       | MAX   | MIN         | MAX    |
| A   | 0.684     | 0.694 | 17.374      | 17.627 |
| B   | 0.784     | 0.792 | 19.914      | 20.116 |
| C   | 0.173     | 0.181 | 4.395       | 4.597  |
| D   | 0.024     | 0.031 | 0.610       | 0.787  |
| E   | 0.058     | 0.062 | 1.473       | 1.574  |
| G   | 0.050 BSC |       | 1.270 BSC   |        |
| H   | 0.169 BSC |       | 4.293 BSC   |        |
| J   | 0.018     | 0.024 | 0.458       | 0.609  |
| K   | 0.700     | 0.710 | 17.780      | 18.034 |
| L   | 0.200 BSC |       | 5.080 BSC   |        |
| M   | 0.148     | 0.151 | 3.760       | 3.835  |
| R   | 0.416     | 0.426 | 10.567      | 10.820 |
| S   | 0.157     | 0.167 | 3.988       | 4.242  |
| U   | 0.105     | 0.115 | 2.667       | 2.921  |
| V   | 0.868 REF |       | 22.047 REF  |        |
| Y   | 0.625     | 0.639 | 15.875      | 16.231 |

**T SUFFIX**  
**CASE 821D-03**  
 Plastic Package  
 ISSUE C

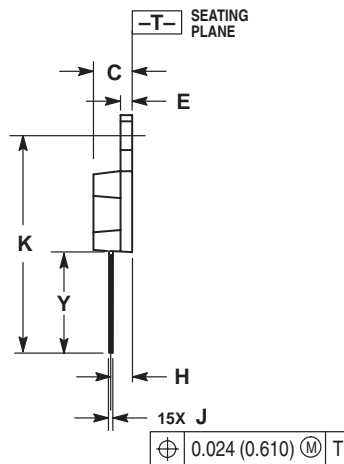
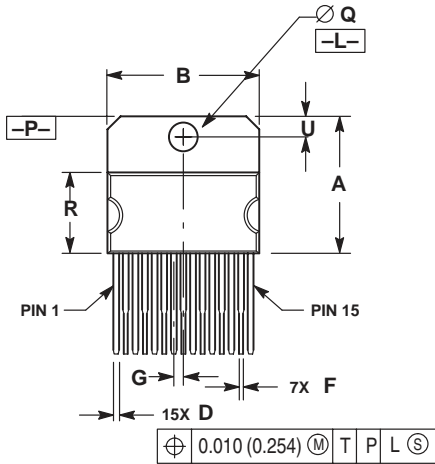



**NOTES:**


1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.
3. DIMENSION R DOES NOT INCLUDE MOLD FLASH OR PROTRUSIONS.
4. DIMENSION B DOES NOT INCLUDE MOLD FLASH OR PROTRUSIONS.
5. MOLD FLASH OR PROTRUSIONS SHALL NOT EXCEED 0.010 (0.250).
6. DELETED
7. DIMENSION D DOES NOT INCLUDE DAMBAR PROTRUSION. ALLOWABLE PROTRUSION SHALL BE 0.003 (0.076) TOTAL IN EXCESS OF THE D DIMENSION, AT MAXIMUM MATERIAL CONDITION.

| DIM | INCHES    |       | MILLIMETERS |        |
|-----|-----------|-------|-------------|--------|
|     | MIN       | MAX   | MIN         | MAX    |
| A   | 0.681     | 0.694 | 17.298      | 17.627 |
| B   | 0.784     | 0.792 | 19.914      | 20.116 |
| C   | 0.173     | 0.181 | 4.395       | 4.597  |
| D   | 0.024     | 0.031 | 0.610       | 0.787  |
| E   | 0.058     | 0.062 | 1.473       | 1.574  |
| F   | 0.016     | 0.023 | 0.407       | 0.584  |
| G   | 0.050 BSC |       | 1.270 BSC   |        |
| H   | 0.110 BSC |       | 2.794 BSC   |        |
| J   | 0.018     | 0.024 | 0.458       | 0.609  |
| K   | 1.078     | 1.086 | 27.382      | 27.584 |
| Q   | 0.148     | 0.151 | 3.760       | 3.835  |
| R   | 0.416     | 0.426 | 10.567      | 10.820 |
| U   | 0.110 BSC |       | 2.794 BSC   |        |
| Y   | 0.503 REF |       | 12.776 REF  |        |

**FTB SUFFIX**  
**CASE 824D-01**  
 Plastic Package  
 (TQFP-44)  
 ISSUE O

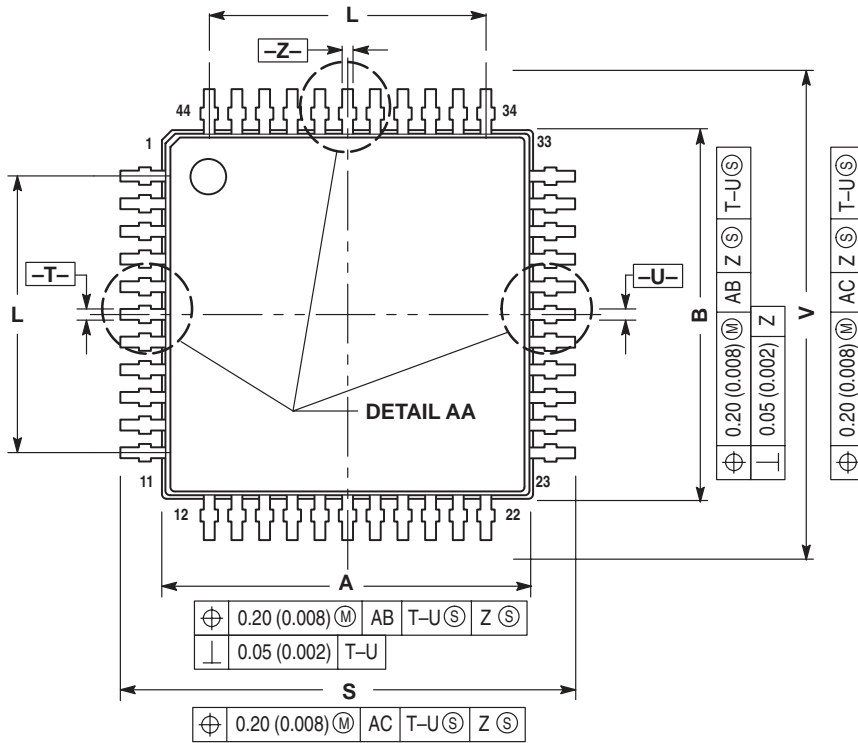



**DETAIL AA**

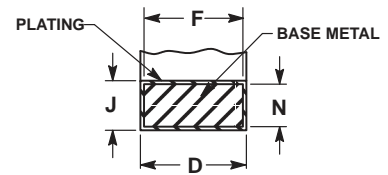

|   |                  |    |         |       |
|---|------------------|----|---------|-------|
| ⊕ | 0.20 (0.008) (M) | AC | T-U (S) | Z (S) |
|---|------------------|----|---------|-------|

**SECTION AE-AE**





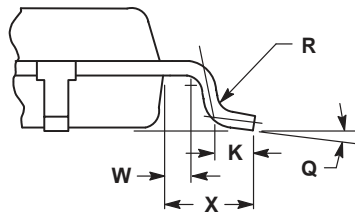
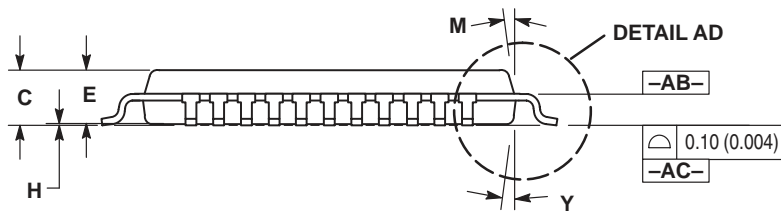


**VIEW AD**

- NOTES:**
- DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
  - CONTROLLING DIMENSION: MILLIMETER.
  - DATUM PLANE -AB- IS LOCATED AT BOTTOM OF LEAD AND IS COINCIDENT WITH THE LEAD WHERE THE LEAD EXITS THE PLASTIC BODY AT THE BOTTOM OF THE PARTING LINE.
  - DATUMS -T-, -U- AND -Z- TO BE DETERMINED AT DATUM PLANE -AB-.
  - DIMENSIONS S AND V TO BE DETERMINED AT SEATING PLANE -AC-.
  - DIMENSIONS A AND B DO NOT INCLUDE MOLD PROTRUSION. ALLOWABLE PROTRUSION IS 0.25 (0.010) PER SIDE. DIMENSIONS A AND B DO INCLUDE MOLD MISMATCH AND ARE DETERMINED AT DATUM PLANE -AB-.
  - DIMENSION D DOES NOT INCLUDE DAMBAR PROTRUSION. DAMBAR PROTRUSION SHALL NOT CAUSE THE D DIMENSION TO EXCEED 0.530 (0.021).

| DIM | MILLIMETERS |        | INCHES    |       |
|-----|-------------|--------|-----------|-------|
|     | MIN         | MAX    | MIN       | MAX   |
| A   | 9.950       | 10.050 | 0.392     | 0.396 |
| B   | 9.950       | 10.050 | 0.392     | 0.396 |
| C   | 1.400       | 1.600  | 0.055     | 0.063 |
| D   | 0.300       | 0.450  | 0.012     | 0.018 |
| E   | 1.350       | 1.450  | 0.053     | 0.057 |
| F   | 0.300       | 0.400  | 0.012     | 0.016 |
| G   | 0.800 BSC   |        | 0.031 BSC |       |
| H   | 0.050       | 0.150  | 0.002     | 0.006 |
| J   | 0.090       | 0.200  | 0.004     | 0.008 |
| K   | 0.450       | 0.550  | 0.018     | 0.022 |
| L   | 8.000 BSC   |        | 0.315 BSC |       |
| M   | 12° REF     |        | 12° REF   |       |
| N   | 0.090       | 0.160  | 0.004     | 0.006 |
| Q   | 1°          | 5°     | 1°        | 5°    |
| R   | 0.100       | 0.200  | 0.004     | 0.008 |
| S   | 11.900      | 12.100 | 0.469     | 0.476 |
| V   | 11.900      | 12.100 | 0.469     | 0.476 |
| W   | 0.200 REF   |        | 0.008 REF |       |
| X   | 1.000 REF   |        | 0.039 REF |       |
| Y   | 12° REF     |        | 12° REF   |       |







**FB SUFFIX**  
**CASE 824E-02**  
 Plastic Package  
 (QFP)  
 ISSUE A

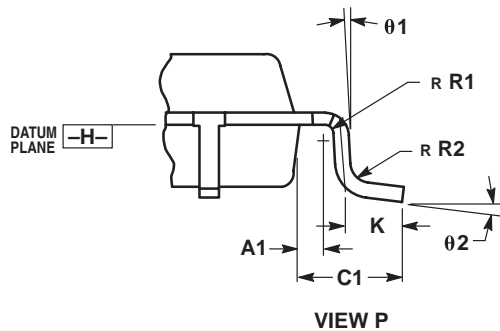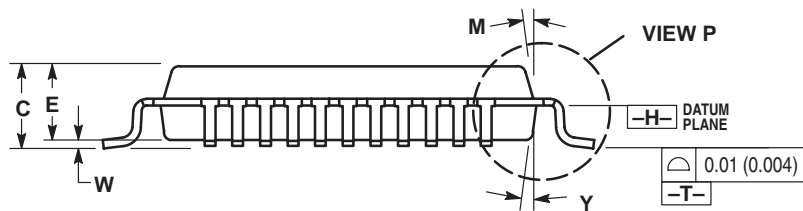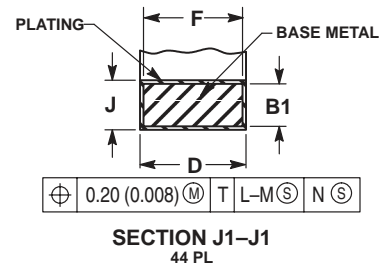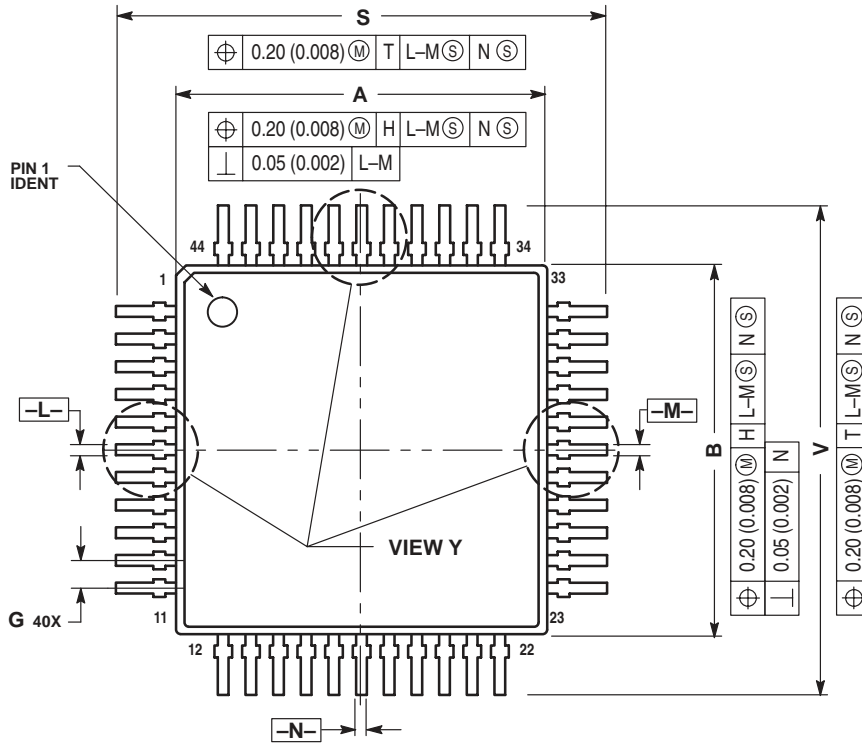

- NOTES:
- DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
  - CONTROLLING DIMENSION: MILLIMETER.
  - DATUM PLANE -H- IS LOCATED AT BOTTOM OF LEAD AND IS COINCIDENT WITH THE LEAD WHERE THE LEAD EXITS THE PLASTIC BODY AT THE BOTTOM OF THE PARTING LINE.
  - DATUMS -L-, -M- AND -N- TO BE DETERMINED AT DATUM PLANE -H-.
  - DIMENSIONS S AND V TO BE DETERMINED AT SEATING PLANE -T-.
  - DIMENSIONS A AND B DO NOT INCLUDE MOLD PROTRUSION. ALLOWABLE PROTRUSION IS 0.25 (0.010) PER SIDE. DIMENSIONS A AND B DO INCLUDE MOLD MISMATCH AND ARE DETERMINED AT DATUM PLANE -H-.
  - DIMENSION D DOES NOT INCLUDE DAMBAR PROTRUSION. DAMBAR PROTRUSION SHALL NOT CAUSE THE D DIMENSION TO EXCEED 0.530 (0.021).

| DIM     | MILLIMETERS |       | INCHES    |        |
|---------|-------------|-------|-----------|--------|
|         | MIN         | MAX   | MIN       | MAX    |
| A       | 9.90        | 10.10 | 0.390     | 0.398  |
| B       | 9.90        | 10.10 | 0.390     | 0.398  |
| C       | 2.00        | 2.21  | 0.079     | 0.087  |
| D       | 0.30        | 0.45  | 0.0118    | 0.0177 |
| E       | 2.00        | 2.10  | 0.079     | 0.083  |
| F       | 0.30        | 0.40  | 0.012     | 0.016  |
| G       | 0.80 BSC    |       | 0.031 BSC |        |
| J       | 0.13        | 0.23  | 0.005     | 0.009  |
| K       | 0.65        | 0.95  | 0.026     | 0.037  |
| M       | 5° 10°      |       | 5° 10°    |        |
| S       | 12.95       | 13.45 | 0.510     | 0.530  |
| V       | 12.95       | 13.45 | 0.510     | 0.530  |
| W       | 0.000       | 0.210 | 0.000     | 0.008  |
| Y       | 5° 10°      |       | 5° 10°    |        |
| A1      | 0.450 REF   |       | 0.018 REF |        |
| B1      | 0.130       | 0.170 | 0.005     | 0.007  |
| C1      | 1.600 REF   |       | 0.063 REF |        |
| R1      | 0.130       | 0.300 | 0.005     | 0.012  |
| R2      | 0.130       | 0.300 | 0.005     | 0.012  |
| theta 1 | 5° 10°      |       | 5° 10°    |        |
| theta 2 | 0° 7°       |       | 0° 7°     |        |


**FB SUFFIX**  
**CASE 840F-01**  
 Plastic Package  
 ISSUE O

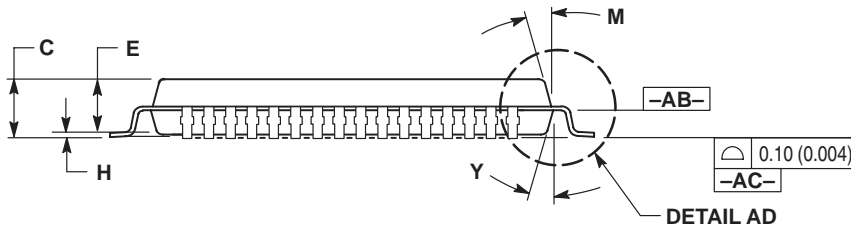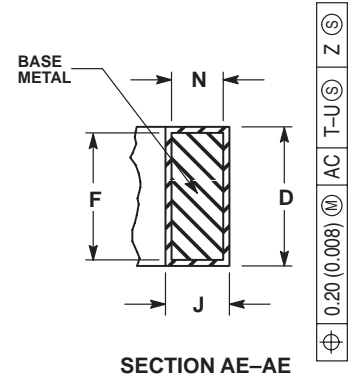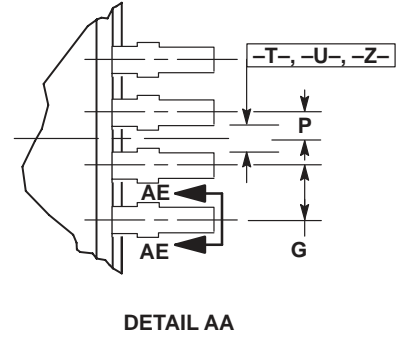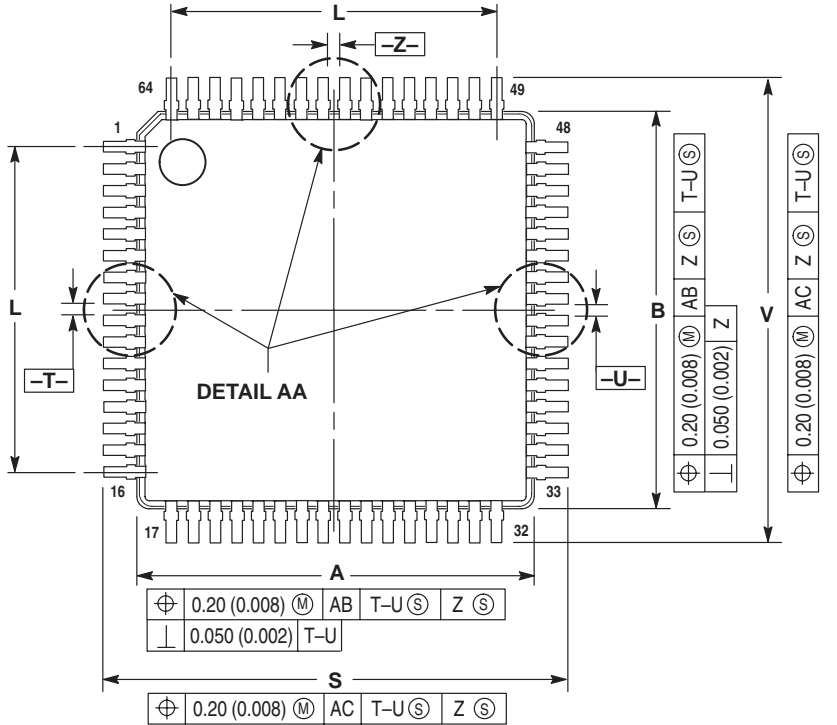

- NOTES:
- DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
  - CONTROLLING DIMENSION: MILLIMETER.
  - DATUM PLANE -AB- IS LOCATED AT BOTTOM OF LEAD AND IS COINCIDENT WITH THE LEAD WHERE THE LEAD EXITS THE PLASTIC BODY AT THE BOTTOM OF THE PARTING LINE.
  - DATUMS -T-, -U- AND -Z- TO BE DETERMINED AT DATUM PLANE -AC-.
  - DIMENSIONS S AND V TO BE DETERMINED AT SEATING PLANE -AC-.
  - DIMENSIONS A AND B DO NOT INCLUDE MOLD PROTRUSION. ALLOWABLE PROTRUSION IS 0.25 (0.010) PER SIDE. DIMENSIONS A AND B DO INCLUDE MOLD MISMATCH AND ARE DETERMINED AT DATUM PLANE -AB-.
  - DIMENSION D DOES NOT INCLUDE DAMBAR PROTRUSION. DAMBAR PROTRUSION SHALL NOT CAUSE THE D DIMENSION TO EXCEED 0.350 (0.014).

| DIM | MILLIMETERS |        | INCHES    |       |
|-----|-------------|--------|-----------|-------|
|     | MIN         | MAX    | MIN       | MAX   |
| A   | 9.950       | 10.050 | 0.392     | 0.396 |
| B   | 9.950       | 10.050 | 0.392     | 0.396 |
| C   | 1.400       | 1.600  | 0.055     | 0.063 |
| D   | 0.170       | 0.270  | 0.007     | 0.011 |
| E   | 1.350       | 1.450  | 0.053     | 0.057 |
| F   | 0.170       | 0.230  | 0.007     | 0.009 |
| G   | 0.500 BSC   |        | 0.020 BSC |       |
| H   | 0.050       | 0.150  | 0.002     | 0.006 |
| J   | 0.090       | 0.200  | 0.004     | 0.008 |
| K   | 0.450       | 0.550  | 0.018     | 0.022 |
| L   | 7.500 BSC   |        | 0.295 BSC |       |
| M   | 12° REF     |        | 12° REF   |       |
| N   | 0.090       | 0.160  | 0.004     | 0.006 |
| P   | 0.250 BSC   |        | 0.010 BSC |       |
| Q   | 1°          | 5°     | 1°        | 5°    |
| R   | 0.100       | 0.200  | 0.004     | 0.008 |
| S   | 11.900      | 12.100 | 0.469     | 0.476 |
| V   | 11.900      | 12.100 | 0.469     | 0.476 |
| W   | 0.200 REF   |        | 0.008 REF |       |
| X   | 1.000 REF   |        | 0.039 REF |       |
| Y   | 12° REF     |        | 12° REF   |       |

**DM SUFFIX**  
**CASE 846A-02**  
 Plastic Package  
 (Micro-8)  
 ISSUE C







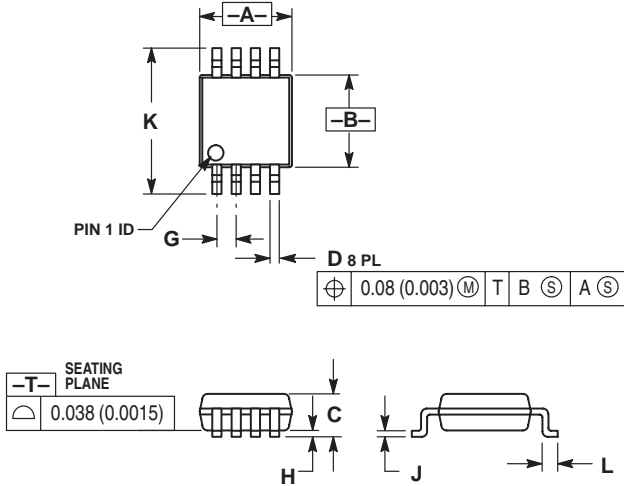


**NOTES:**

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: MILLIMETER.
3. DIMENSION A DOES NOT INCLUDE MOLD FLASH, PROTRUSIONS OR GATE BURRS. MOLD FLASH, PROTRUSIONS OR GATE BURRS SHALL NOT EXCEED 0.15 (0.006) PER SIDE.
4. DIMENSION B DOES NOT INCLUDE INTERLEAD FLASH OR PROTRUSION. INTERLEAD FLASH OR PROTRUSION SHALL NOT EXCEED 0.25 (0.010) PER SIDE.

| DIM | MILLIMETERS |      | INCHES    |       |
|-----|-------------|------|-----------|-------|
|     | MIN         | MAX  | MIN       | MAX   |
| A   | 2.90        | 3.10 | 0.114     | 0.122 |
| B   | 2.90        | 3.10 | 0.114     | 0.122 |
| C   | —           | 1.10 | —         | 0.043 |
| D   | 0.25        | 0.40 | 0.010     | 0.016 |
| G   | 0.65 BSC    |      | 0.026 BSC |       |
| H   | 0.05        | 0.15 | 0.002     | 0.006 |
| J   | 0.13        | 0.23 | 0.005     | 0.009 |
| K   | 4.75        | 5.05 | 0.187     | 0.199 |
| L   | 0.40        | 0.70 | 0.016     | 0.028 |

**FB SUFFIX**  
**CASE 848B-04**  
 Plastic Package  
 (TQFP-52)  
 ISSUE C

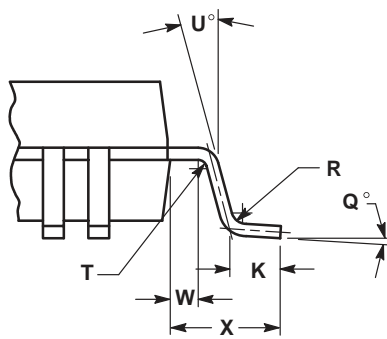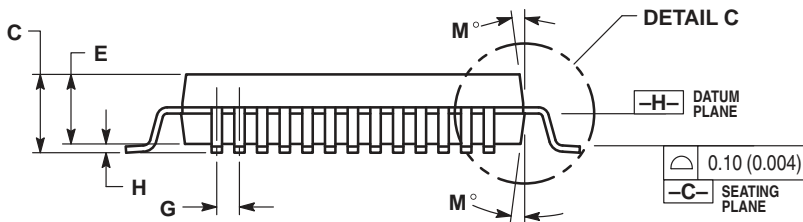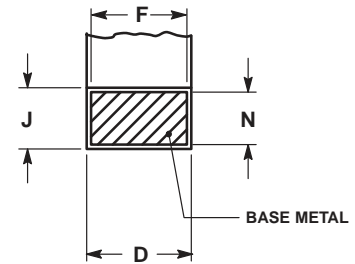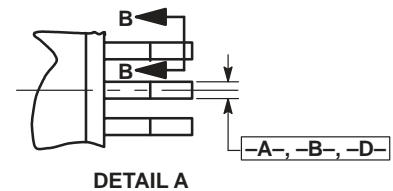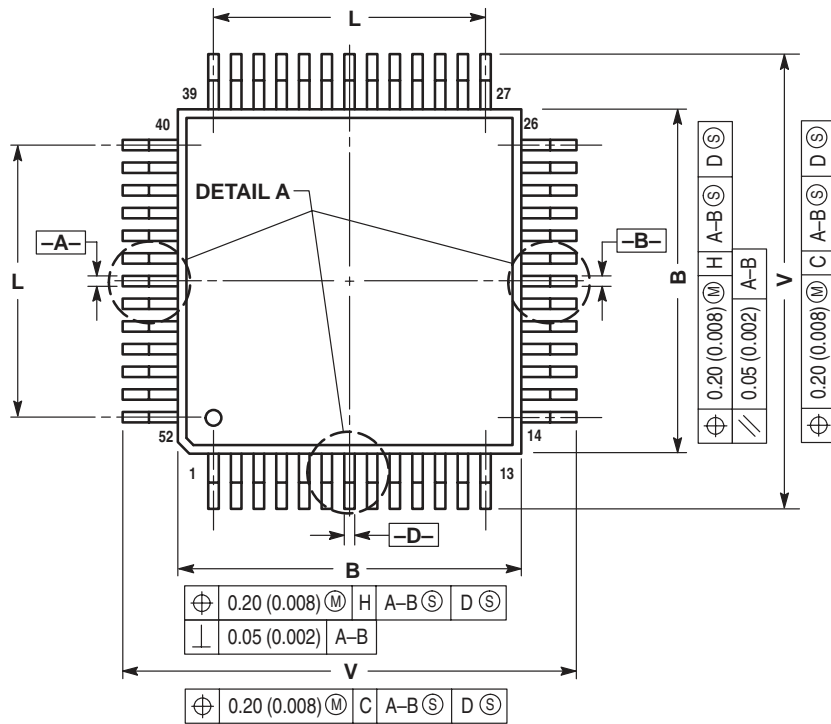


**NOTES:**




- DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
- CONTROLLING DIMENSION: MILLIMETER.
- DATUM PLANE -H- IS LOCATED AT BOTTOM OF LEAD AND IS COINCIDENT WITH THE LEAD WHERE THE LEAD EXITS THE PLASTIC BODY AT THE BOTTOM OF THE PARTING LINE.
- DATUMS -A-, -B- AND -D- TO BE DETERMINED AT DATUM PLANE -H-.
- DIMENSIONS S AND V TO BE DETERMINED AT SEATING PLANE -C-.
- DIMENSIONS A AND B DO NOT INCLUDE MOLD PROTRUSION. ALLOWABLE PROTRUSION IS 0.25 (0.010) PER SIDE. DIMENSIONS A AND B DO INCLUDE MOLD MISMATCH AND ARE DETERMINED AT DATUM PLANE -H-.
- DIMENSION D DOES NOT INCLUDE DAMBAR PROTRUSION. ALLOWABLE DAMBAR PROTRUSION SHALL BE 0.08 (0.003) TOTAL IN EXCESS OF THE D DIMENSION AT MAXIMUM MATERIAL CONDITION. DAMBAR CANNOT BE LOCATED ON THE LOWER RADIUS OR THE FOOT.

| DIM | MILLIMETERS |       | INCHES    |       |
|-----|-------------|-------|-----------|-------|
|     | MIN         | MAX   | MIN       | MAX   |
| A   | 9.90        | 10.10 | 0.390     | 0.398 |
| B   | 9.90        | 10.10 | 0.390     | 0.398 |
| C   | 2.10        | 2.45  | 0.083     | 0.096 |
| D   | 0.22        | 0.38  | 0.009     | 0.015 |
| E   | 2.00        | 2.10  | 0.079     | 0.083 |
| F   | 0.22        | 0.33  | 0.009     | 0.013 |
| G   | 0.65 BSC    |       | 0.026 BSC |       |
| H   | — 0.25      |       | — 0.010   |       |
| J   | 0.13        | 0.23  | 0.005     | 0.009 |
| K   | 0.65        | 0.95  | 0.026     | 0.037 |
| L   | 7.80 REF    |       | 0.307 REF |       |
| M   | 5°          | 10°   | 5°        | 10°   |
| N   | 0.13        | 0.17  | 0.005     | 0.007 |
| Q   | 0° 7°       |       | 0° 7°     |       |
| R   | 0.13        | 0.30  | 0.005     | 0.012 |
| S   | 12.95       | 13.45 | 0.510     | 0.530 |
| T   | 0.13        |       | 0.005     |       |
| U   | 0°          |       | 0°        |       |
| V   | 12.95       | 13.45 | 0.510     | 0.530 |
| W   | 0.35        | 0.45  | 0.014     | 0.018 |
| X   | 1.6 REF     |       | 0.063 REF |       |



**FB SUFFIX**  
**CASE 848D-03**  
 Plastic Package  
 ISSUE C



52 1

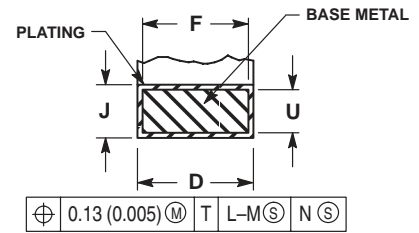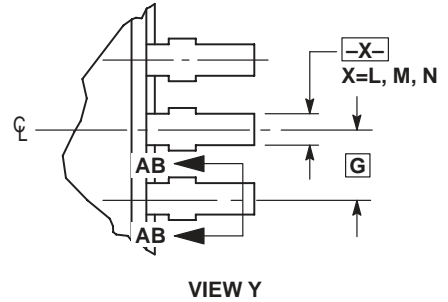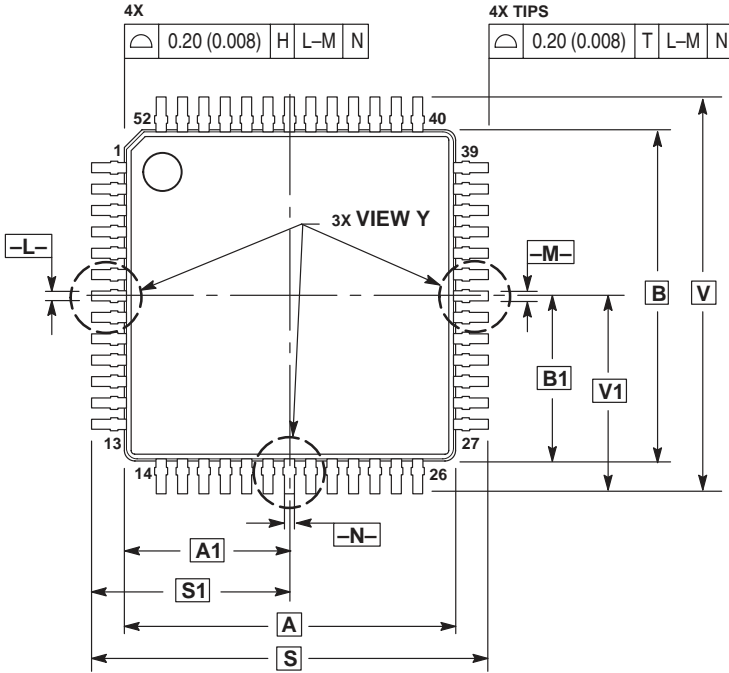

**SECTION AB-AB**  
 ROTATED 90° CLOCKWISE

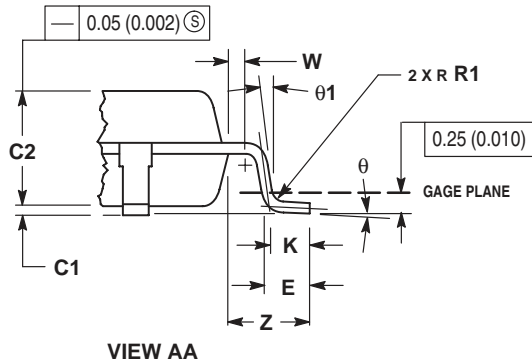
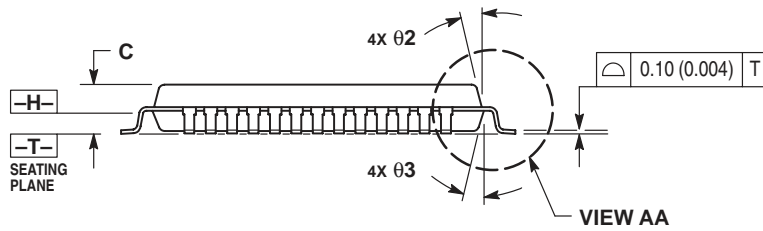


- NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
  2. CONTROLLING DIMENSION: MILLIMETER.
  3. DATUM PLANE -H- IS LOCATED AT BOTTOM OF LEAD AND IS COINCIDENT WITH THE LEAD WHERE THE LEAD EXITS THE PLASTIC BODY AT THE BOTTOM OF THE PARTING LINE.
  4. DATUMS -L-, -M- AND -N- TO BE DETERMINED AT DATUM PLANE -H-.
  5. DIMENSIONS S AND V TO BE DETERMINED AT SEATING PLANE -T-.
  6. DIMENSIONS A AND B DO NOT INCLUDE MOLD PROTRUSION. ALLOWABLE PROTRUSION IS 0.25 (0.010) PER SIDE. DIMENSIONS A AND B DO NOT INCLUDE MOLD MISMATCH AND ARE DETERMINED AT DATUM PLANE -H-.
  7. DIMENSION D DOES NOT INCLUDE DAMBAR PROTRUSION. DAMBAR PROTRUSION SHALL NOT CAUSE THE LEAD WIDTH TO EXCEED 0.46 (0.018). MINIMUM SPACE BETWEEN PROTRUSION AND ADJACENT LEAD OR PROTRUSION 0.07 (0.003).

| DIM    | MILLIMETERS |           | INCHES |       |
|--------|-------------|-----------|--------|-------|
|        | MIN         | MAX       | MIN    | MAX   |
| A      | 10.00 BSC   | 0.394 BSC |        |       |
| A1     | 5.00 BSC    | 0.197 BSC |        |       |
| B      | 10.00 BSC   | 0.394 BSC |        |       |
| B1     | 5.00 BSC    | 0.197 BSC |        |       |
| C      | —           | 1.70      | —      | 0.067 |
| C1     | 0.05        | 0.20      | 0.002  | 0.008 |
| C2     | 1.30        | 1.50      | 0.051  | 0.059 |
| D      | 0.20        | 0.40      | 0.008  | 0.016 |
| E      | 0.45        | 0.75      | 0.018  | 0.030 |
| F      | 0.22        | 0.35      | 0.009  | 0.014 |
| G      | 0.65 BSC    | 0.026 BSC |        |       |
| J      | 0.07        | 0.20      | 0.003  | 0.008 |
| K      | 0.50 REF    | 0.020 REF |        |       |
| R1     | 0.08        | 0.20      | 0.003  | 0.008 |
| S      | 12.00 BSC   | 0.472 BSC |        |       |
| S1     | 6.00 BSC    | 0.236 BSC |        |       |
| U      | 0.09        | 0.16      | 0.004  | 0.006 |
| V      | 12.00 BSC   | 0.472 BSC |        |       |
| V1     | 6.00 BSC    | 0.236 BSC |        |       |
| W      | 0.20 REF    | 0.008 REF |        |       |
| Z      | 1.00 REF    | 0.039 REF |        |       |
| theta  | 0°          | 7°        | 0°     | 7°    |
| theta1 | 0°          | —         | 0°     | —     |
| theta2 | 12° REF     | 12° REF   |        |       |
| theta3 | 5°          | 13°       | 5°     | 13°   |





**B SUFFIX**  
**CASE 858-01**  
 Plastic Package  
 ISSUE O

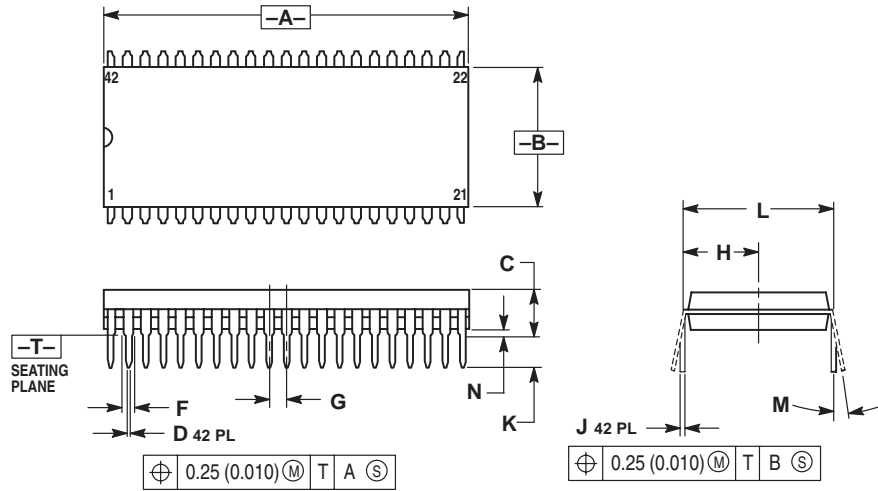

- NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
  2. CONTROLLING DIMENSION: INCH.
  3. DIMENSION L TO CENTER OF LEAD WHEN FORMED PARALLEL.
  4. DIMENSIONS A AND B DO NOT INCLUDE MOLD FLASH. MAXIMUM MOLD FLASH 0.25 (0.010).

| DIM | INCHES    |       | MILLIMETERS |       |
|-----|-----------|-------|-------------|-------|
|     | MIN       | MAX   | MIN         | MAX   |
| A   | 1.435     | 1.465 | 36.45       | 37.21 |
| B   | 0.540     | 0.560 | 13.72       | 14.22 |
| C   | 0.155     | 0.200 | 3.94        | 5.08  |
| D   | 0.014     | 0.022 | 0.36        | 0.56  |
| F   | 0.032     | 0.046 | 0.81        | 1.17  |
| G   | 0.070 BSC |       | 1.778 BSC   |       |
| H   | 0.300 BSC |       | 7.62 BSC    |       |
| J   | 0.008     | 0.015 | 0.20        | 0.38  |
| K   | 0.115     | 0.135 | 2.92        | 3.43  |
| L   | 0.600 BSC |       | 15.24 BSC   |       |
| M   | 0°        | 15°   | 0°          | 15°   |
| N   | 0.020     | 0.040 | 0.51        | 1.02  |







**B SUFFIX**  
**CASE 859-01**  
 Plastic Package  
 (SDIP)  
 ISSUE O

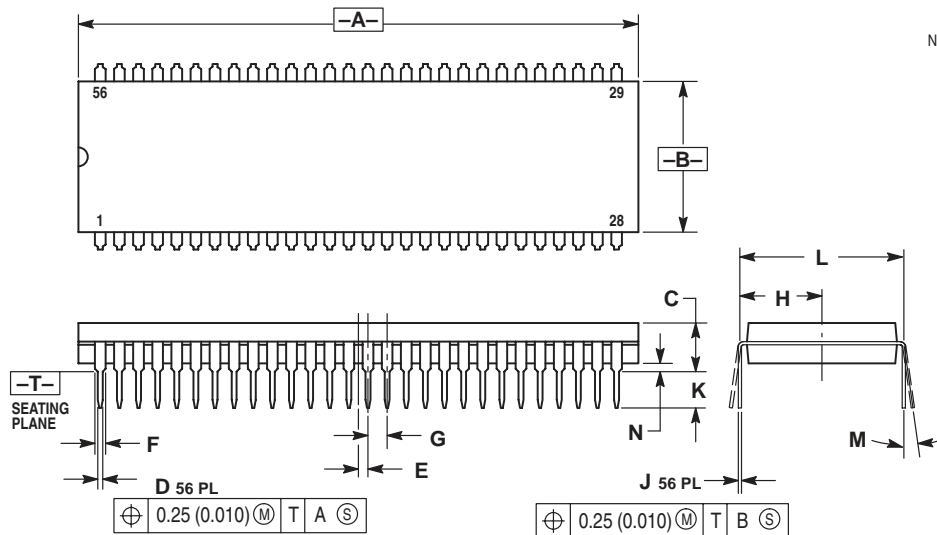

- NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
  2. CONTROLLING DIMENSION: INCH.
  3. DIMENSION L TO CENTER OF LEAD WHEN FORMED PARALLEL.
  4. DIMENSIONS A AND B DO NOT INCLUDE MOLD FLASH. MAXIMUM MOLD FLASH 0.25 (0.010)

| DIM | INCHES    |       | MILLIMETERS |       |
|-----|-----------|-------|-------------|-------|
|     | MIN       | MAX   | MIN         | MAX   |
| A   | 2.035     | 2.065 | 51.69       | 52.45 |
| B   | 0.540     | 0.560 | 13.72       | 14.22 |
| C   | 0.155     | 0.200 | 3.94        | 5.08  |
| D   | 0.014     | 0.022 | 0.36        | 0.56  |
| E   | 0.035 BSC |       | 0.89 BSC    |       |
| F   | 0.032     | 0.046 | 0.81        | 1.17  |
| G   | 0.070 BSC |       | 1.778 BSC   |       |
| H   | 0.300 BSC |       | 7.62 BSC    |       |
| J   | 0.008     | 0.015 | 0.20        | 0.38  |
| K   | 0.115     | 0.135 | 2.92        | 3.43  |
| L   | 0.600 BSC |       | 15.24 BSC   |       |
| M   | 0°        | 15°   | 0°          | 15°   |
| N   | 0.020     | 0.040 | 0.51        | 1.02  |

**FB, FTB SUFFIX**  
**CASE 873-01**  
 Plastic Package  
 (TQFP-32)  
 ISSUE A

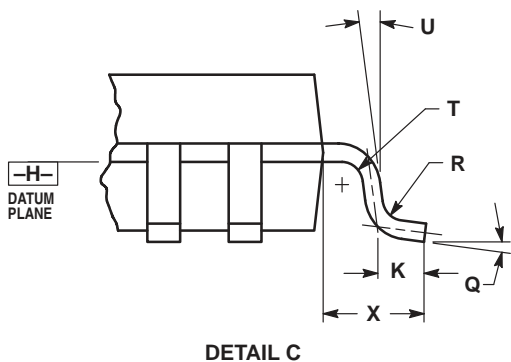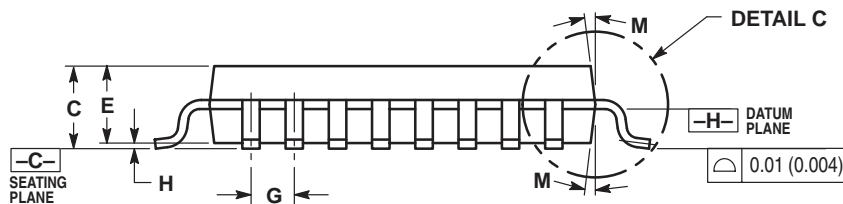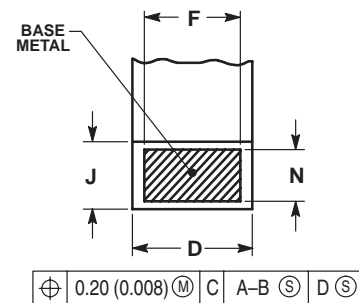
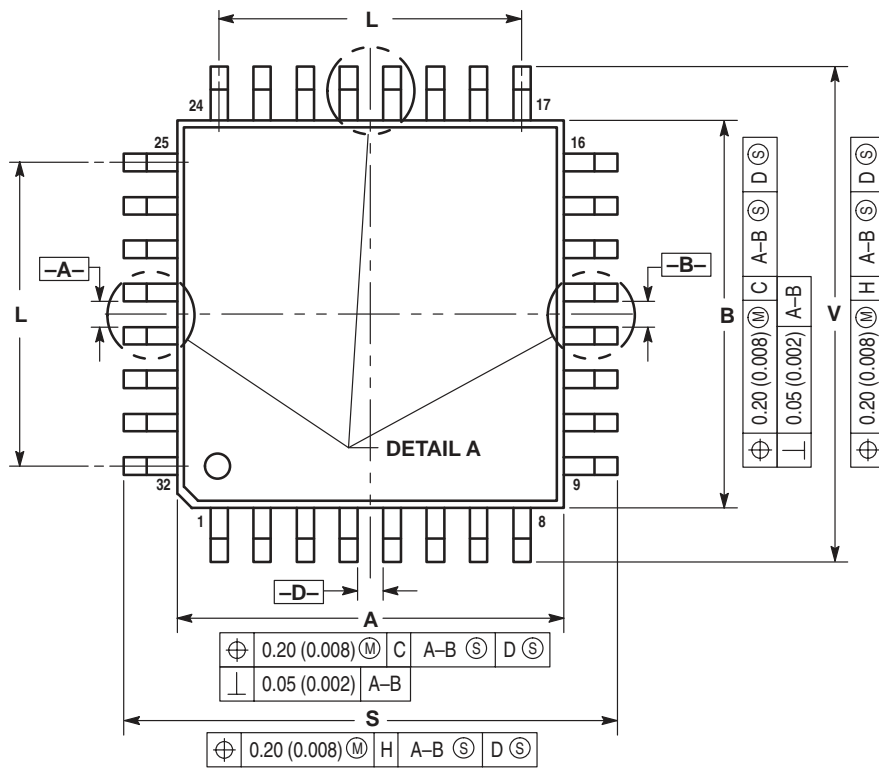



**NOTES:**

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: MILLIMETER.
3. DATUM PLANE -H- IS LOCATED AT BOTTOM OF LEAD AND IS COINCIDENT WITH THE LEAD WHERE THE LEAD EXITS THE PLASTIC BODY AT THE BOTTOM OF THE PARTING LINE.
4. DATUMS -A-, -B- AND -D- TO BE DETERMINED AT DATUM PLANE -H-.
5. DIMENSIONS S AND V TO BE DETERMINED AT SEATING PLANE -C-.
6. DIMENSIONS A AND B DO NOT INCLUDE MOLD PROTRUSION. ALLOWABLE PROTRUSION IS 0.25 (0.010) PER SIDE. DIMENSIONS A AND B DO INCLUDE MOLD MISMATCH AND ARE DETERMINED AT DATUM PLANE -H-.
7. DIMENSION D DOES NOT INCLUDE DAMBAR PROTRUSION. ALLOWABLE DAMBAR PROTRUSION SHALL BE 0.08 (0.003) TOTAL IN EXCESS OF THE D DIMENSION AT MAXIMUM MATERIAL CONDITION. DAMBAR CANNOT BE LOCATED ON THE LOWER RADIUS OR THE FOOT.

| DIM | MILLIMETERS |       | INCHES    |       |
|-----|-------------|-------|-----------|-------|
|     | MIN         | MAX   | MIN       | MAX   |
| A   | 6.95        | 7.10  | 0.274     | 0.280 |
| B   | 6.95        | 7.10  | 0.274     | 0.280 |
| C   | 1.40        | 1.60  | 0.055     | 0.063 |
| D   | 0.273       | 0.373 | 0.010     | 0.015 |
| E   | 1.30        | 1.50  | 0.051     | 0.059 |
| F   | 0.273       | —     | 0.010     | —     |
| G   | 0.80 BSC    | —     | 0.031 BSC | —     |
| H   | —           | 0.20  | —         | 0.008 |
| J   | 0.119       | 0.197 | 0.005     | 0.008 |
| K   | 0.33        | 0.57  | 0.013     | 0.022 |
| L   | 5.6 REF     | —     | 0.220 REF | —     |
| M   | 6°          | 8°    | 6°        | 8°    |
| N   | 0.119       | 0.135 | 0.005     | 0.005 |
| P   | 0.40 BSC    | —     | 0.016 BSC | —     |
| Q   | 5°          | 10°   | 5°        | 10°   |
| R   | 0.15        | 0.25  | 0.006     | 0.010 |
| S   | 8.85        | 9.15  | 0.348     | 0.360 |
| T   | 0.15        | 0.25  | 0.006     | 0.010 |
| U   | 5°          | 11°   | 5°        | 11°   |
| V   | 8.85        | 9.15  | 0.348     | 0.360 |
| X   | 1.00 REF    | —     | 0.039 REF | —     |

**T SUFFIX**  
**CASE 894-03**  
 Plastic Package  
 (23-Pin SZIP)  
 ISSUE B



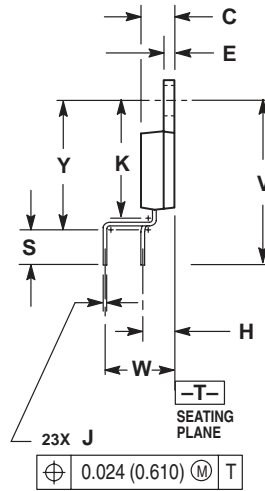
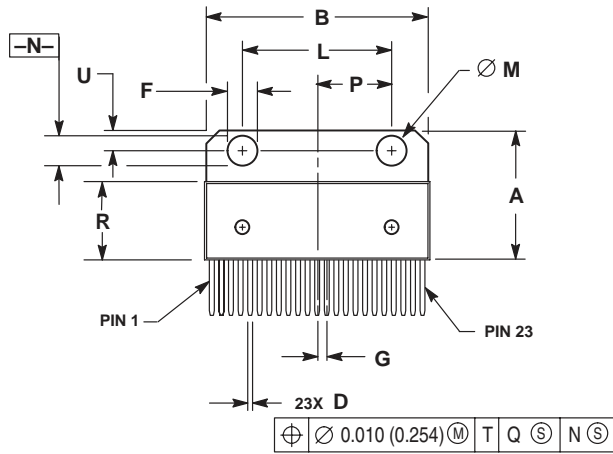



NOTES:

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.
3. DIMENSION R DOES NOT INCLUDE MOLD FLASH OR PROTRUSIONS.
4. DIMENSION B DOES NOT INCLUDE MOLD FLASH OR PROTRUSIONS.
5. MOLD FLASH OR PROTRUSIONS SHALL NOT EXCEED 0.010 (0.250).
6. DIMENSION D DOES NOT INCLUDE DAMBAR PROTRUSION. ALLOWABLE PROTRUSION SHALL BE 0.003 (0.076) TOTAL IN EXCESS OF THE D DIMENSION AT MAXIMUM MATERIAL CONDITION.

| DIM | INCHES    |       | MILLIMETERS |        |
|-----|-----------|-------|-------------|--------|
|     | MIN       | MAX   | MIN         | MAX    |
| A   | 0.684     | 0.694 | 17.374      | 17.627 |
| B   | 1.183     | 1.193 | 30.048      | 30.302 |
| C   | 0.175     | 0.179 | 4.445       | 4.547  |
| D   | 0.026     | 0.031 | 0.660       | 0.787  |
| E   | 0.058     | 0.062 | 1.473       | 1.574  |
| F   | 0.165     | 0.175 | 4.191       | 4.445  |
| G   | 0.050 BSC |       | 1.270 BSC   |        |
| H   | 0.169 BSC |       | 4.293 BSC   |        |
| J   | 0.014     | 0.020 | 0.356       | 0.508  |
| K   | 0.625     | 0.639 | 15.875      | 16.231 |
| L   | 0.770     | 0.790 | 19.558      | 20.066 |
| M   | 0.148     | 0.152 | 3.760       | 3.861  |
| N   | 0.148     | 0.152 | 3.760       | 3.861  |
| P   | 0.390 BSC |       | 9.906 BSC   |        |
| R   | 0.416     | 0.424 | 10.566      | 10.770 |
| S   | 0.157     | 0.167 | 3.988       | 4.242  |
| U   | 0.105     | 0.115 | 2.667       | 2.921  |
| V   | 0.868 REF |       | 22.047 REF  |        |
| W   | 0.200 BSC |       | 5.080 BSC   |        |
| Y   | 0.700     | 0.710 | 17.780      | 18.034 |



FTA SUFFIX  
CASE 932-02  
Plastic Package  
(TQFP-48)  
ISSUE D

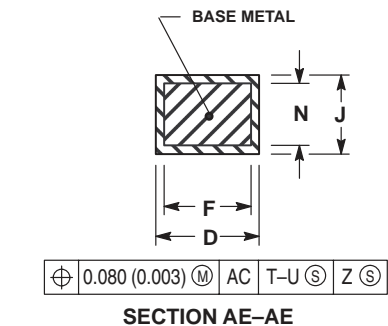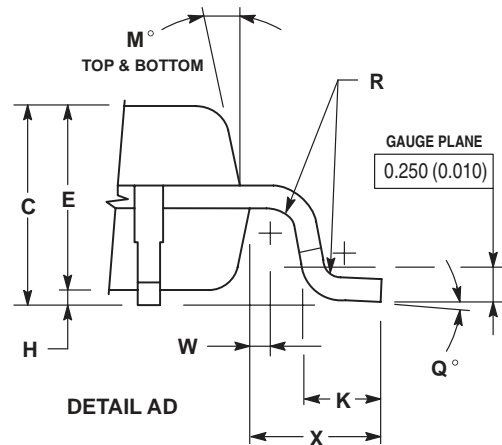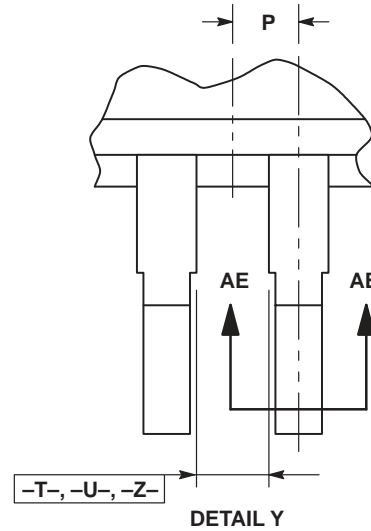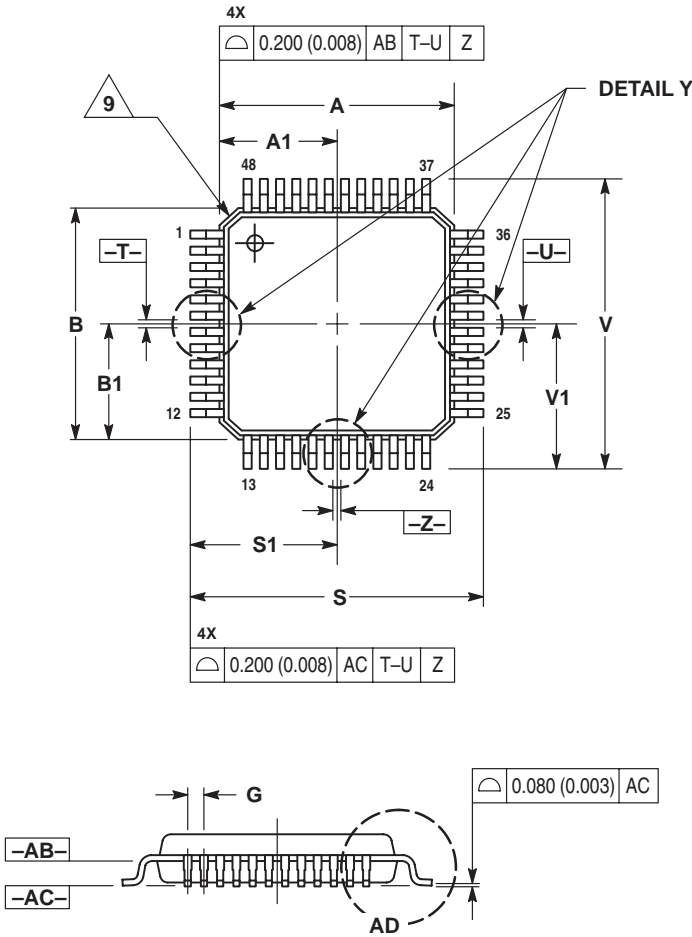



- NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
  2. CONTROLLING DIMENSION: MILLIMETER.
  3. DATUM PLANE -AB- IS LOCATED AT BOTTOM OF LEAD AND IS COINCIDENT WITH THE LEAD WHERE THE LEAD EXITS THE PLASTIC BODY AT THE BOTTOM OF THE PARTING LINE.
  4. DATUMS -T-, -U-, AND -Z- TO BE DETERMINED AT DATUM PLANE -AB-.
  5. DIMENSIONS S AND V TO BE DETERMINED AT SEATING PLANE -AC-.
  6. DIMENSIONS A AND B DO NOT INCLUDE MOLD PROTRUSION. ALLOWABLE PROTRUSION IS 0.250 (0.010) PER SIDE. DIMENSIONS A AND B DO NOT INCLUDE MOLD MISMATCH AND ARE DETERMINED AT DATUM PLANE -AB-.
  7. DIMENSION D DOES NOT INCLUDE DAMBAR PROTRUSION. DAMBAR PROTRUSION SHALL NOT CAUSE THE D DIMENSION TO EXCEED 0.350 (0.014).
  8. MINIMUM SOLDER PLATE THICKNESS SHALL BE 0.0076 (0.0003).
  9. EXACT SHAPE OF EACH CORNER IS OPTIONAL.

| DIM | MILLIMETERS |       | INCHES      |       |
|-----|-------------|-------|-------------|-------|
|     | MIN         | MAX   | MIN         | MAX   |
| A   | 7.000 BSC   |       | 0.276 BSC   |       |
| A1  | 3.500 BSC   |       | 0.138 BSC   |       |
| B   | 7.000 BSC   |       | 0.276 BSC   |       |
| B1  | 3.500 BSC   |       | 0.138 BSC   |       |
| C   | 1.400       | 1.600 | 0.055       | 0.063 |
| D   | 0.170       | 0.270 | 0.007       | 0.011 |
| E   | 1.350       | 1.450 | 0.053       | 0.057 |
| F   | 0.170       | 0.230 | 0.007       | 0.009 |
| G   | 0.500 BASIC |       | 0.020 BASIC |       |
| H   | 0.050       | 0.150 | 0.002       | 0.006 |
| J   | 0.090       | 0.200 | 0.004       | 0.008 |
| K   | 0.500       | 0.700 | 0.020       | 0.028 |
| M   | 12° REF     |       | 12° REF     |       |
| N   | 0.090       | 0.160 | 0.004       | 0.006 |
| P   | 0.250 BASIC |       | 0.010 BASIC |       |
| Q   | 1°          | 5°    | 1°          | 5°    |
| R   | 0.150       | 0.250 | 0.006       | 0.010 |
| S   | 9.000 BSC   |       | 0.354 BSC   |       |
| S1  | 4.500 BSC   |       | 0.177 BSC   |       |
| V   | 9.000 BSC   |       | 0.354 BSC   |       |
| V1  | 4.500 BSC   |       | 0.177 BSC   |       |
| W   | 0.200 REF   |       | 0.008 REF   |       |
| X   | 1.000 REF   |       | 0.039 REF   |       |

**D2T SUFFIX**  
**CASE 936-03**  
 Plastic Package  
 ISSUE B

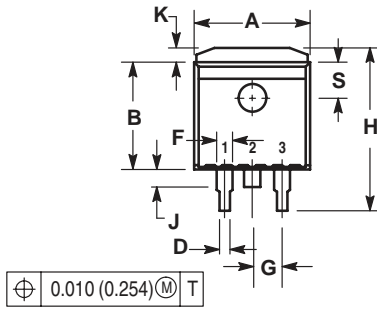



$\oplus 0.010 (0.254) \text{M} \text{T}$

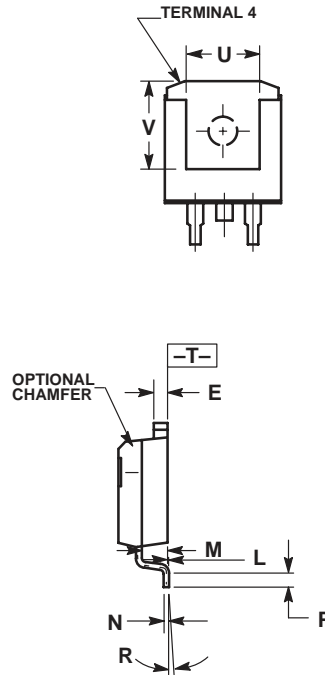



- NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
  2. CONTROLLING DIMENSION: INCH.
  3. TAB CONTOUR OPTIONAL WITHIN DIMENSIONS A AND K.
  4. DIMENSIONS U AND V ESTABLISH A MINIMUM MOUNTING SURFACE FOR TERMINAL 4.
  5. DIMENSIONS A AND B DO NOT INCLUDE MOLD FLASH OR GATE PROTRUSIONS. MOLD FLASH AND GATE PROTRUSIONS NOT TO EXCEED 0.025 (0.635) MAXIMUM.

| DIM | INCHES    |       | MILLIMETERS |        |
|-----|-----------|-------|-------------|--------|
|     | MIN       | MAX   | MIN         | MAX    |
| A   | 0.386     | 0.403 | 9.804       | 10.236 |
| B   | 0.356     | 0.368 | 9.042       | 9.347  |
| C   | 0.170     | 0.180 | 4.318       | 4.572  |
| D   | 0.026     | 0.036 | 0.660       | 0.914  |
| E   | 0.045     | 0.055 | 1.143       | 1.397  |
| F   | 0.051 REF |       | 1.295 REF   |        |
| G   | 0.100 BSC |       | 2.540 BSC   |        |
| H   | 0.539     | 0.579 | 13.691      | 14.707 |
| J   | 0.125 MAX |       | 3.175 MAX   |        |
| K   | 0.050 REF |       | 1.270 REF   |        |
| L   | 0.000     | 0.010 | 0.000       | 0.254  |
| M   | 0.088     | 0.102 | 2.235       | 2.591  |
| N   | 0.018     | 0.026 | 0.457       | 0.660  |
| P   | 0.058     | 0.078 | 1.473       | 1.981  |
| R   | 5° REF    |       | 5° REF      |        |
| S   | 0.116 REF |       | 2.946 REF   |        |
| U   | 0.200 MIN |       | 5.080 MIN   |        |
| V   | 0.250 MIN |       | 6.350 MIN   |        |

**D2T SUFFIX**  
**CASE 936A-02**  
 Plastic Package  
 (D<sup>2</sup>PAK)  
 ISSUE A

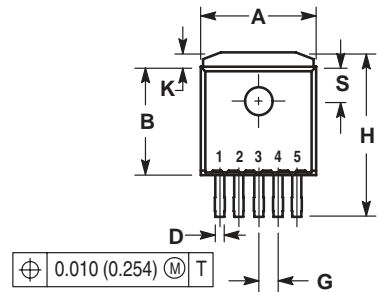



$\oplus 0.010 (0.254) \text{M} \text{T}$

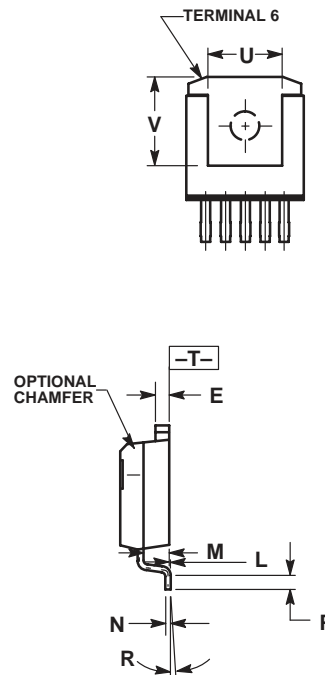

- NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
  2. CONTROLLING DIMENSION: INCH.
  3. TAB CONTOUR OPTIONAL WITHIN DIMENSIONS A AND K.
  4. DIMENSIONS U AND V ESTABLISH A MINIMUM MOUNTING SURFACE FOR TERMINAL 6.
  5. DIMENSIONS A AND B DO NOT INCLUDE MOLD FLASH OR GATE PROTRUSIONS. MOLD FLASH AND GATE PROTRUSIONS NOT TO EXCEED 0.025 (0.635) MAXIMUM.

| DIM | INCHES    |       | MILLIMETERS |        |
|-----|-----------|-------|-------------|--------|
|     | MIN       | MAX   | MIN         | MAX    |
| A   | 0.386     | 0.403 | 9.804       | 10.236 |
| B   | 0.356     | 0.368 | 9.042       | 9.347  |
| C   | 0.170     | 0.180 | 4.318       | 4.572  |
| D   | 0.026     | 0.036 | 0.660       | 0.914  |
| E   | 0.045     | 0.055 | 1.143       | 1.397  |
| G   | 0.067 BSC |       | 1.702 BSC   |        |
| H   | 0.539     | 0.579 | 13.691      | 14.707 |
| K   | 0.050 REF |       | 1.270 REF   |        |
| L   | 0.000     | 0.010 | 0.000       | 0.254  |
| M   | 0.088     | 0.102 | 2.235       | 2.591  |
| N   | 0.018     | 0.026 | 0.457       | 0.660  |
| P   | 0.058     | 0.078 | 1.473       | 1.981  |
| R   | 5° REF    |       | 5° REF      |        |
| S   | 0.116 REF |       | 2.946 REF   |        |
| U   | 0.200 MIN |       | 5.080 MIN   |        |
| V   | 0.250 MIN |       | 6.350 MIN   |        |



**DT, DTB SUFFIX**  
**CASE 948E-02**  
 Plastic Package  
 (TSSOP-20)  
 ISSUE A

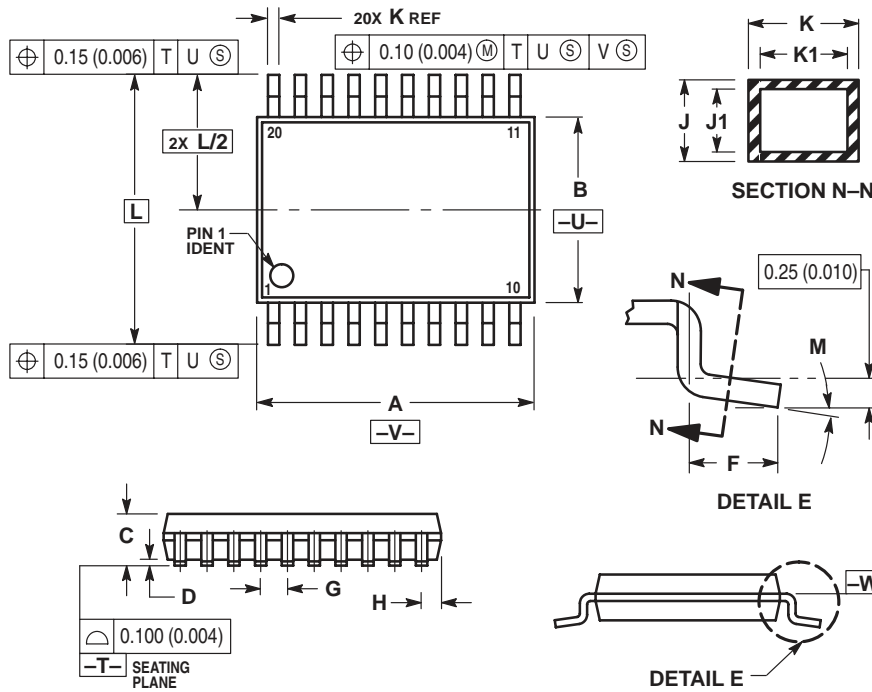

- NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
  2. CONTROLLING DIMENSION: MILLIMETER.
  3. DIMENSION A DOES NOT INCLUDE MOLD FLASH, PROTRUSIONS OR GATE BURRS. MOLD FLASH OR GATE BURRS SHALL NOT EXCEED 0.15 (0.006) PER SIDE.
  4. DIMENSION B DOES NOT INCLUDE INTERLEAD FLASH OR PROTRUSION. INTERLEAD FLASH OR PROTRUSION SHALL NOT EXCEED 0.25 (0.010) PER SIDE.
  5. DIMENSION K DOES NOT INCLUDE DAMBAR PROTRUSION. ALLOWABLE DAMBAR PROTRUSION SHALL BE 0.08 (0.003) TOTAL IN EXCESS OF THE K DIMENSION AT MAXIMUM MATERIAL CONDITION.
  6. TERMINAL NUMBERS ARE SHOWN FOR REFERENCE ONLY.
  7. DIMENSION A AND B ARE TO BE DETERMINED AT DATUM PLANE -W-.

| DIM | MILLIMETERS |      | INCHES    |       |
|-----|-------------|------|-----------|-------|
|     | MIN         | MAX  | MIN       | MAX   |
| A   | 6.40        | 6.60 | 0.252     | 0.260 |
| B   | 4.30        | 4.50 | 0.169     | 0.177 |
| C   | —           | 1.20 | —         | 0.047 |
| D   | 0.05        | 0.15 | 0.002     | 0.006 |
| F   | 0.50        | 0.75 | 0.020     | 0.030 |
| G   | 0.65 BSC    |      | 0.026 BSC |       |
| H   | 0.27        | 0.37 | 0.011     | 0.015 |
| J   | 0.09        | 0.20 | 0.004     | 0.008 |
| J1  | 0.09        | 0.16 | 0.004     | 0.006 |
| K   | 0.19        | 0.30 | 0.007     | 0.012 |
| K1  | 0.19        | 0.25 | 0.007     | 0.010 |
| L   | 6.40 BSC    |      | 0.252 BSC |       |
| M   | 0°          | 8°   | 0°        | 8°    |


**DTB SUFFIX**  
**CASE 948F-01**  
 Plastic Package  
 (TSSOP-16, TSSOP-16L)  
 ISSUE O

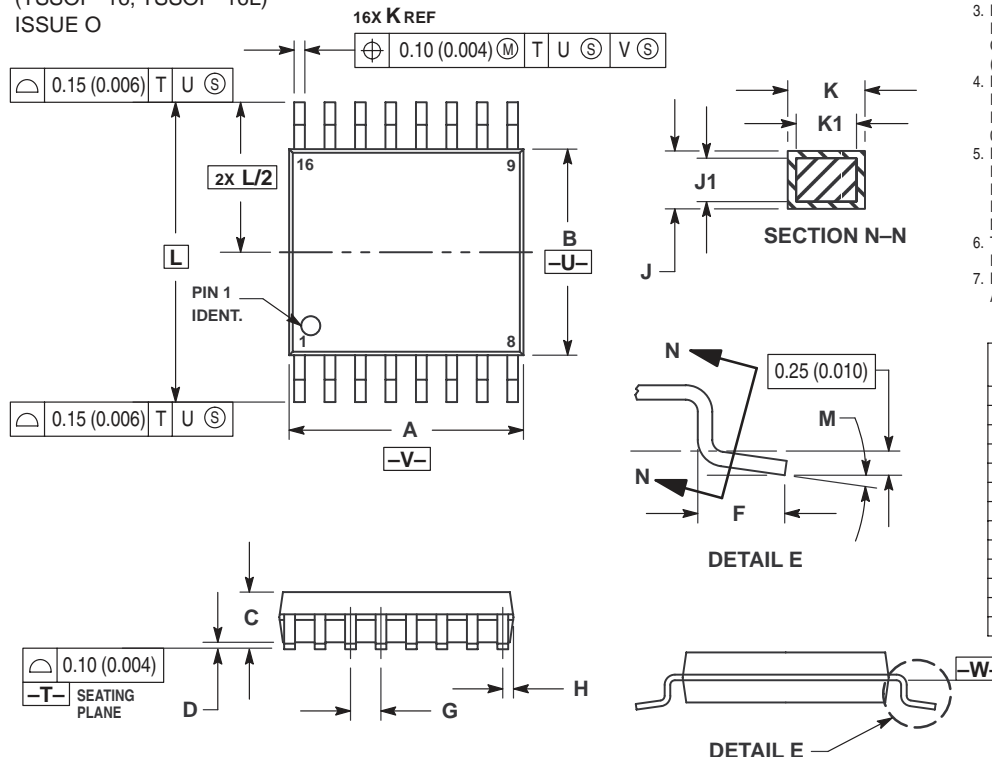

- NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
  2. CONTROLLING DIMENSION: MILLIMETER.
  3. DIMENSION A DOES NOT INCLUDE MOLD FLASH, PROTRUSIONS OR GATE BURRS. MOLD FLASH OR GATE BURRS SHALL NOT EXCEED 0.15 (0.006) PER SIDE.
  4. DIMENSION B DOES NOT INCLUDE INTERLEAD FLASH OR PROTRUSION. INTERLEAD FLASH OR PROTRUSION SHALL NOT EXCEED 0.25 (0.010) PER SIDE.
  5. DIMENSION K DOES NOT INCLUDE DAMBAR PROTRUSION. ALLOWABLE DAMBAR PROTRUSION SHALL BE 0.08 (0.003) TOTAL IN EXCESS OF THE K DIMENSION AT MAXIMUM MATERIAL CONDITION.
  6. TERMINAL NUMBERS ARE SHOWN FOR REFERENCE ONLY.
  7. DIMENSION A AND B ARE TO BE DETERMINED AT DATUM PLANE -W-.

| DIM | MILLIMETERS |      | INCHES    |       |
|-----|-------------|------|-----------|-------|
|     | MIN         | MAX  | MIN       | MAX   |
| A   | 4.90        | 5.10 | 0.193     | 0.200 |
| B   | 4.30        | 4.50 | 0.169     | 0.177 |
| C   | —           | 1.20 | —         | 0.047 |
| D   | 0.05        | 0.15 | 0.002     | 0.006 |
| F   | 0.50        | 0.75 | 0.020     | 0.030 |
| G   | 0.65 BSC    |      | 0.026 BSC |       |
| H   | 0.18        | 0.28 | 0.007     | 0.011 |
| J   | 0.09        | 0.20 | 0.004     | 0.008 |
| J1  | 0.09        | 0.16 | 0.004     | 0.006 |
| K   | 0.19        | 0.30 | 0.007     | 0.012 |
| K1  | 0.19        | 0.25 | 0.007     | 0.010 |
| L   | 6.40 BSC    |      | 0.252 BSC |       |
| M   | 0°          | 8°   | 0°        | 8°    |

**DTB SUFFIX**  
**CASE 948G-01**  
 Plastic Package  
 (TSSOP-14)  
 ISSUE O


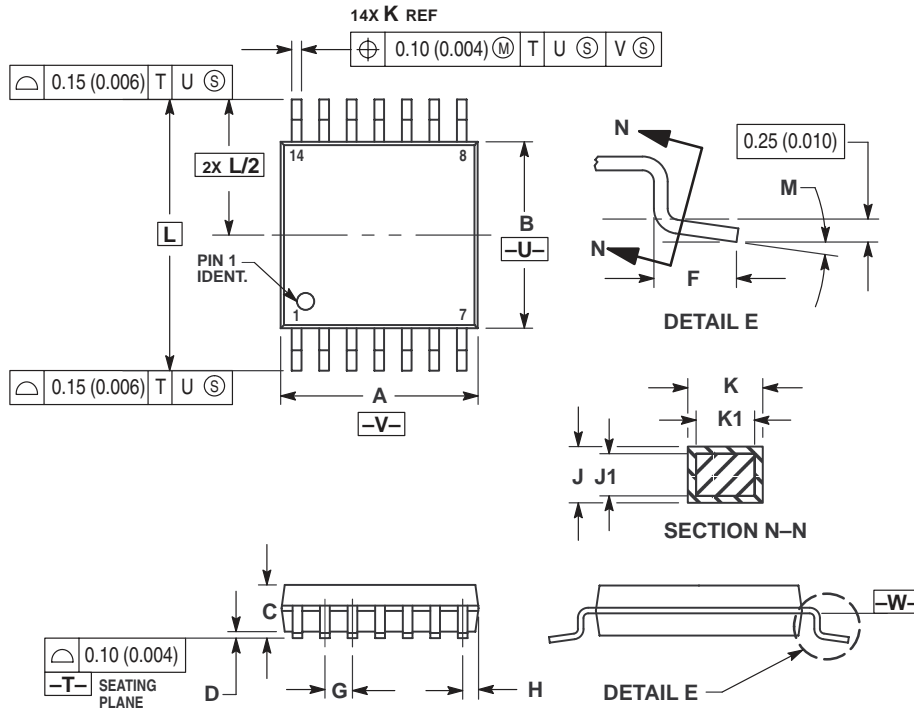


**NOTES:**


- 1 DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
- 2 CONTROLLING DIMENSION: MILLIMETER.
- 3 DIMENSION A DOES NOT INCLUDE MOLD FLASH, PROTRUSIONS OR GATE BURRS. MOLD FLASH OR GATE BURRS SHALL NOT EXCEED 0.15 (0.006) PER SIDE.
- 4 DIMENSION B DOES NOT INCLUDE INTERLEAD FLASH OR PROTRUSION. INTERLEAD FLASH OR PROTRUSION SHALL NOT EXCEED 0.25 (0.010) PER SIDE.
- 5 DIMENSION K DOES NOT INCLUDE DAMBAR PROTRUSION. ALLOWABLE DAMBAR PROTRUSION SHALL BE 0.08 (0.003) TOTAL IN EXCESS OF THE K DIMENSION AT MAXIMUM MATERIAL CONDITION.
- 6 TERMINAL NUMBERS ARE SHOWN FOR REFERENCE ONLY.
- 7 DIMENSION A AND B ARE TO BE DETERMINED AT DATUM PLANE -W-.

| DIM | MILLIMETERS |      | INCHES    |       |
|-----|-------------|------|-----------|-------|
|     | MIN         | MAX  | MIN       | MAX   |
| A   | 4.90        | 5.10 | 0.193     | 0.200 |
| B   | 4.30        | 4.50 | 0.169     | 0.177 |
| C   | —           | 1.20 | —         | 0.047 |
| D   | 0.05        | 0.15 | 0.002     | 0.006 |
| F   | 0.50        | 0.75 | 0.020     | 0.030 |
| G   | 0.65 BSC    |      | 0.026 BSC |       |
| H   | 0.50        | 0.60 | 0.020     | 0.024 |
| J   | 0.09        | 0.20 | 0.004     | 0.008 |
| J1  | 0.09        | 0.16 | 0.004     | 0.006 |
| K   | 0.19        | 0.30 | 0.007     | 0.012 |
| K1  | 0.19        | 0.25 | 0.007     | 0.010 |
| L   | 6.40 BSC    |      | 0.252 BSC |       |
| M   | 0°          | 8°   | 0°        | 8°    |




**DTB SUFFIX**  
**CASE 948H-01**  
 Plastic Package  
 ISSUE O

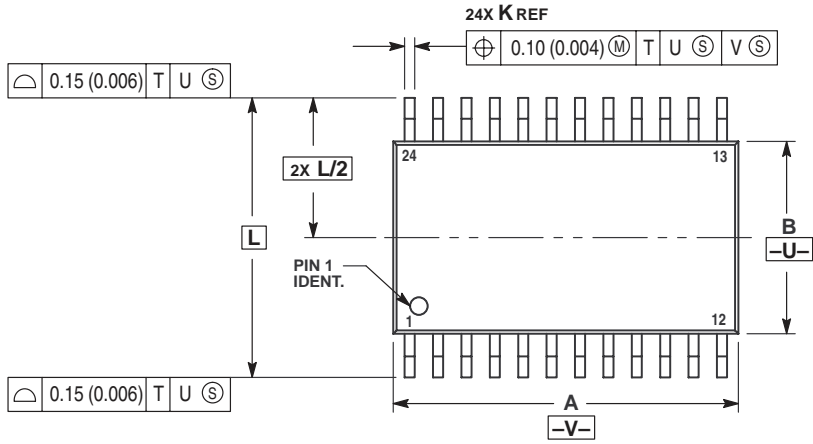

- NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
  2. CONTROLLING DIMENSION: MILLIMETER.
  3. DIMENSION A DOES NOT INCLUDE MOLD FLASH, PROTRUSIONS OR GATE BURRS. MOLD FLASH OR GATE BURRS SHALL NOT EXCEED 0.15 (0.006) PER SIDE.
  4. DIMENSION B DOES NOT INCLUDE INTERLEAD FLASH OR PROTRUSION. INTERLEAD FLASH OR PROTRUSION SHALL NOT EXCEED 0.25 (0.010) PER SIDE.
  5. DIMENSION K DOES NOT INCLUDE DAMBAR PROTRUSION. ALLOWABLE DAMBAR PROTRUSION SHALL BE 0.08 (0.003) TOTAL IN EXCESS OF THE K DIMENSION AT MAXIMUM MATERIAL CONDITION.
  6. TERMINAL NUMBERS ARE SHOWN FOR REFERENCE ONLY.
  7. DIMENSION A AND B ARE TO BE DETERMINED AT DATUM PLANE -W-.

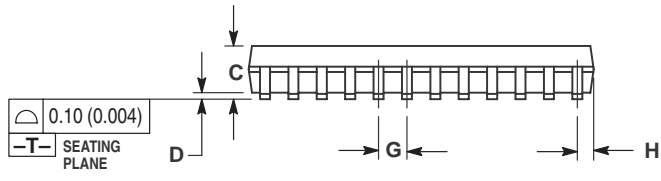


| DIM | MILLIMETERS |      | INCHES    |       |
|-----|-------------|------|-----------|-------|
|     | MIN         | MAX  | MIN       | MAX   |
| A   | 7.70        | 7.90 | 0.303     | 0.311 |
| B   | 4.30        | 4.50 | 0.169     | 0.177 |
| C   | —           | 1.20 | —         | 0.047 |
| D   | 0.05        | 0.15 | 0.002     | 0.006 |
| F   | 0.50        | 0.75 | 0.020     | 0.030 |
| G   | 0.65 BSC    |      | 0.026 BSC |       |
| H   | 0.27        | 0.37 | 0.011     | 0.015 |
| J   | 0.09        | 0.20 | 0.004     | 0.008 |
| J1  | 0.09        | 0.16 | 0.004     | 0.006 |
| K   | 0.19        | 0.30 | 0.007     | 0.012 |
| K1  | 0.19        | 0.25 | 0.007     | 0.010 |
| L   | 6.40 BSC    |      | 0.252 BSC |       |
| M   | 0°          | 8°   | 0°        | 8°    |

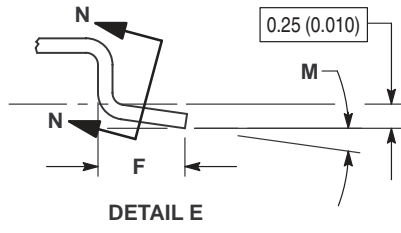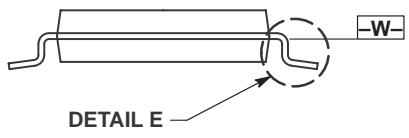





**DTB SUFFIX**  
**CASE 948J-01**  
 Plastic Package  
 (TSSOP-8)  
 ISSUE O

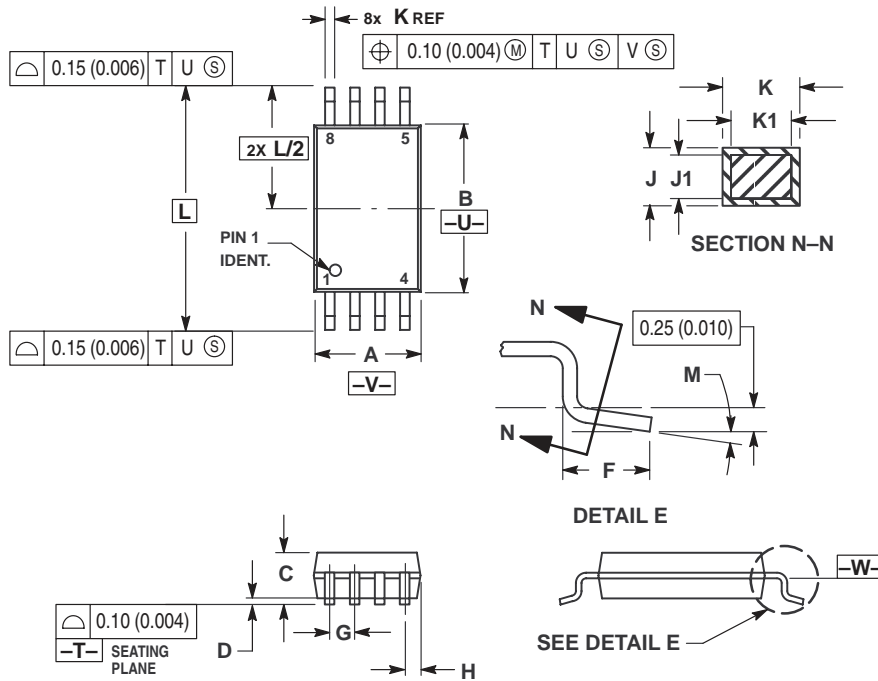

- NOTES:
- 1 DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
  - 2 CONTROLLING DIMENSION: MILLIMETER.
  - 3 DIMENSION A DOES NOT INCLUDE MOLD FLASH, PROTRUSIONS OR GATE BURRS. MOLD FLASH OR GATE BURRS SHALL NOT EXCEED 0.15 (0.006) PER SIDE.
  - 4 DIMENSION B DOES NOT INCLUDE INTERLEAD FLASH OR PROTRUSION. INTERLEAD FLASH OR PROTRUSION SHALL NOT EXCEED 0.25 (0.010) PER SIDE.
  - 5 DIMENSION K DOES NOT INCLUDE DAMBAR PROTRUSION. ALLOWABLE DAMBAR PROTRUSION SHALL BE 0.08 (0.003) TOTAL IN EXCESS OF THE K DIMENSION AT MAXIMUM MATERIAL CONDITION.
  - 6 TERMINAL NUMBERS ARE SHOWN FOR REFERENCE ONLY.
  - 7 DIMENSION A AND B ARE TO BE DETERMINED AT DATUM PLANE -W-.

| DIM | MILLIMETERS |      | INCHES    |       |
|-----|-------------|------|-----------|-------|
|     | MIN         | MAX  | MIN       | MAX   |
| A   | 2.90        | 3.10 | 0.114     | 0.122 |
| B   | 4.30        | 4.50 | 0.169     | 0.177 |
| C   | —           | 1.20 | —         | 0.047 |
| D   | 0.05        | 0.15 | 0.002     | 0.006 |
| F   | 0.50        | 0.75 | 0.020     | 0.030 |
| G   | 0.65 BSC    |      | 0.026 BSC |       |
| H   | 0.50        | 0.60 | 0.020     | 0.024 |
| J   | 0.09        | 0.20 | 0.004     | 0.008 |
| J1  | 0.09        | 0.16 | 0.004     | 0.006 |
| K   | 0.19        | 0.30 | 0.007     | 0.012 |
| K1  | 0.19        | 0.25 | 0.007     | 0.010 |
| L   | 6.40 BSC    |      | 0.252 BSC |       |
| M   | 0°          | 8°   | 0°        | 8°    |


**M SUFFIX**  
**CASE 967-01**  
 Plastic Package  
 (EIAJ-20)  
 ISSUE O

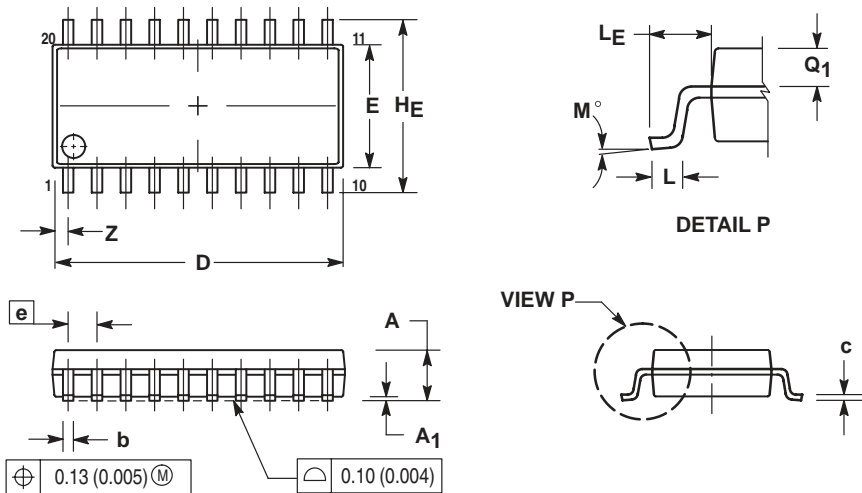


- NOTES:
- 1 DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
  - 2 CONTROLLING DIMENSION: MILLIMETER.
  - 3 DIMENSIONS D AND E DO NOT INCLUDE MOLD FLASH OR PROTRUSIONS AND ARE MEASURED AT THE PARTING LINE. MOLD FLASH OR PROTRUSIONS SHALL NOT EXCEED 0.15 (0.006) PER SIDE.
  - 4 TERMINAL NUMBERS ARE SHOWN FOR REFERENCE ONLY.
  - 5 THE LEAD WIDTH DIMENSION (b) DOES NOT INCLUDE DAMBAR PROTRUSION. ALLOWABLE DAMBAR PROTRUSION SHALL BE 0.08 (0.003) TOTAL IN EXCESS OF THE LEAD WIDTH DIMENSION AT MAXIMUM MATERIAL CONDITION. DAMBAR CANNOT BE LOCATED ON THE LOWER RADIUS OR THE FOOT. MINIMUM SPACE BETWEEN PROTRUSIONS AND ADJACENT LEAD TO BE 0.46 (0.018).

| DIM | MILLIMETERS |       | INCHES    |       |
|-----|-------------|-------|-----------|-------|
|     | MIN         | MAX   | MIN       | MAX   |
| A   | —           | 2.05  | —         | 0.081 |
| A1  | 0.05        | 0.20  | 0.002     | 0.008 |
| b   | 0.35        | 0.50  | 0.014     | 0.020 |
| c   | 0.18        | 0.27  | 0.007     | 0.011 |
| D   | 12.35       | 12.80 | 0.486     | 0.504 |
| E   | 5.10        | 5.45  | 0.201     | 0.215 |
| e   | 1.27 BSC    |       | 0.050 BSC |       |
| HE  | 7.40        | 8.20  | 0.291     | 0.323 |
| L   | 0.50        | 0.85  | 0.020     | 0.033 |
| LE  | 1.10        | 1.50  | 0.043     | 0.059 |
| M   | 0°          | 10°   | 0°        | 10°   |
| Q1  | 0.70        | 0.90  | 0.028     | 0.035 |
| Z   | —           | 0.81  | —         | 0.032 |

**FTB SUFFIX**  
**CASE 976-01**  
 Plastic Package  
 (TQFP-20)  
 ISSUE O





20 1

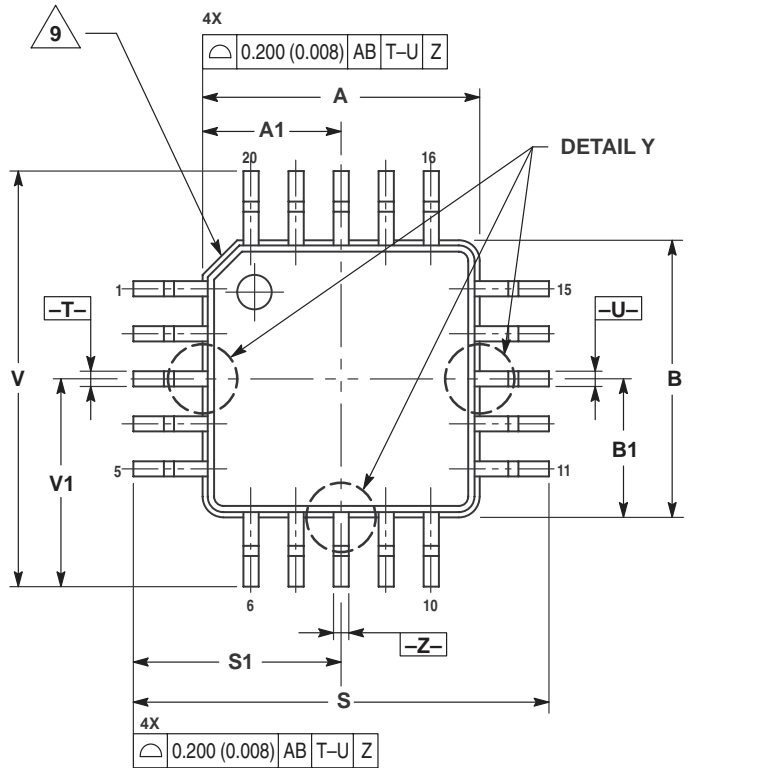


**NOTES:**

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: MILLIMETER.
3. DATUM PLANE -AB- IS LOCATED AT BOTTOM OF LEAD AND IS COINCIDENT WITH THE LEAD WHERE THE LEAD EXITS THE PLASTIC BODY AT THE BOTTOM OF THE PARTING LINE.
4. DATUMS -T-, -U-, AND -Z- TO BE DETERMINED AT DATUM PLANE -AB-.
5. DIMENSIONS S AND V TO BE DETERMINED AT DATUM PLANE -AC-.
6. DIMENSIONS A AND B DO NOT INCLUDE MOLD PROTRUSION. ALLOWABLE PROTRUSION IS 0.250 (0.010) PER SIDE. DIMENSIONS A AND B DO INCLUDE MOLD MISMATCH AND ARE DETERMINED AT DATUM PLANE -AB-.
7. DIMENSION D DOES NOT INCLUDE DAMBAR PROTRUSION. DAMBAR PROTRUSION SHALL NOT CAUSE THE D DIMENSION TO EXCEED 0.350 (0.014).
8. MINIMUM SOLDER PLATE THICKNESS SHALL BE 0.0076 (0.0003).
9. EXACT SHAPE OF EACH CORNER IS OPTIONAL.


| DIM | MILLIMETERS |       | INCHES    |       |
|-----|-------------|-------|-----------|-------|
|     | MIN         | MAX   | MIN       | MAX   |
| A   | 4.000 BSC   |       | 0.157 BSC |       |
| A1  | 2.000 BSC   |       | 0.079 BSC |       |
| B   | 4.000 BSC   |       | 0.157 BSC |       |
| B1  | 2.000 BSC   |       | 0.079 BSC |       |
| C   | 1.400       | 1.600 | 0.055     | 0.063 |
| D   | 0.170       | 0.270 | 0.007     | 0.011 |
| E   | 1.350       | 1.450 | 0.053     | 0.057 |
| F   | 0.170       | 0.230 | 0.007     | 0.009 |
| G   | 0.650 BSC   |       | 0.026 BSC |       |
| H   | 0.050       | 0.150 | 0.002     | 0.006 |
| J   | 0.090       | 0.200 | 0.004     | 0.008 |
| K   | 0.500       | 0.700 | 0.020     | 0.028 |
| M   | 12° REF     |       | 12° REF   |       |
| N   | 0.090       | 0.160 | 0.004     | 0.006 |
| P   | 0.250 BSC   |       | 0.010 BSC |       |
| Q   | 1°          | 5°    | 1°        | 5°    |
| R   | 0.150       | 0.250 | 0.006     | 0.010 |
| S   | 6.000 BSC   |       | 0.236 BSC |       |
| S1  | 3.000 BSC   |       | 0.118 BSC |       |
| V   | 6.000 BSC   |       | 0.236 BSC |       |
| V1  | 3.000 BSC   |       | 0.118 BSC |       |
| W   | 0.200 REF   |       | 0.008 REF |       |
| X   | 1.000 REF   |       | 0.039 REF |       |

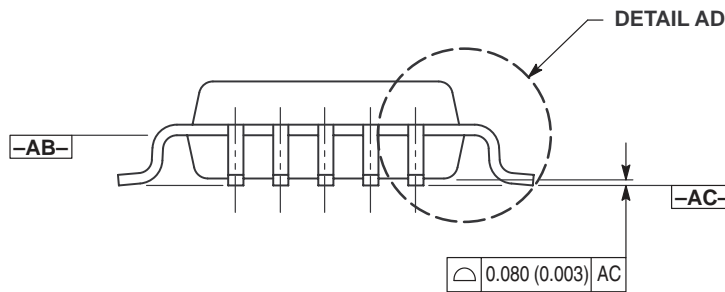

**SECTION AE-AE**

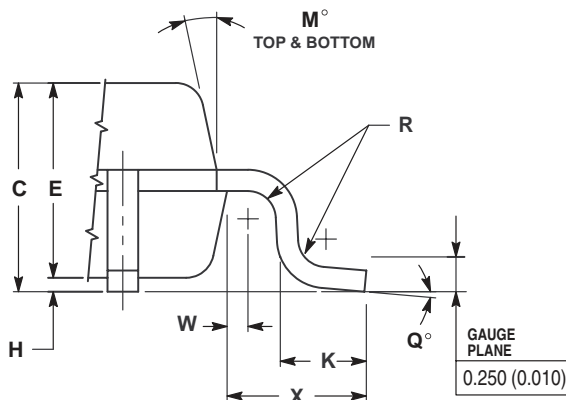


**DETAIL AD**

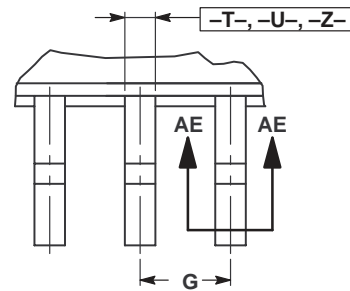


**DETAIL Y**

FTA SUFFIX  
CASE 977-01  
Plastic Package  
ISSUE O






24 1


- NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
  2. CONTROLLING DIMENSION: MILLIMETER.
  3. DATUM PLANE -AB- IS LOCATED AT BOTTOM OF LEAD AND IS COINCIDENT WITH THE LEAD WHERE THE LEAD EXITS THE PLASTIC BODY AT THE BOTTOM OF THE PARTING LINE.
  4. DATUMS -T-, -U-, AND -Z- TO BE DETERMINED AT DATUM PLANE -AB-.
  5. DIMENSIONS S AND V TO BE DETERMINED AT DATUM PLANE -AC-.
  6. DIMENSIONS A AND B DO NOT INCLUDE MOLD PROTRUSION. ALLOWABLE PROTRUSION IS 0.250 (0.010) PER SIDE. DIMENSIONS A AND B DO INCLUDE MOLD MISMATCH AND ARE DETERMINED AT DATUM PLANE -AB-.
  7. DIMENSION D DOES NOT INCLUDE DAMBAR PROTRUSION. DAMBAR PROTRUSION SHALL NOT CAUSE THE D DIMENSION TO EXCEED 0.350 (0.014).
  8. MINIMUM SOLDER PLATE THICKNESS SHALL BE 0.0076 (0.0003).
  9. EXACT SHAPE OF EACH CORNER IS OPTIONAL.

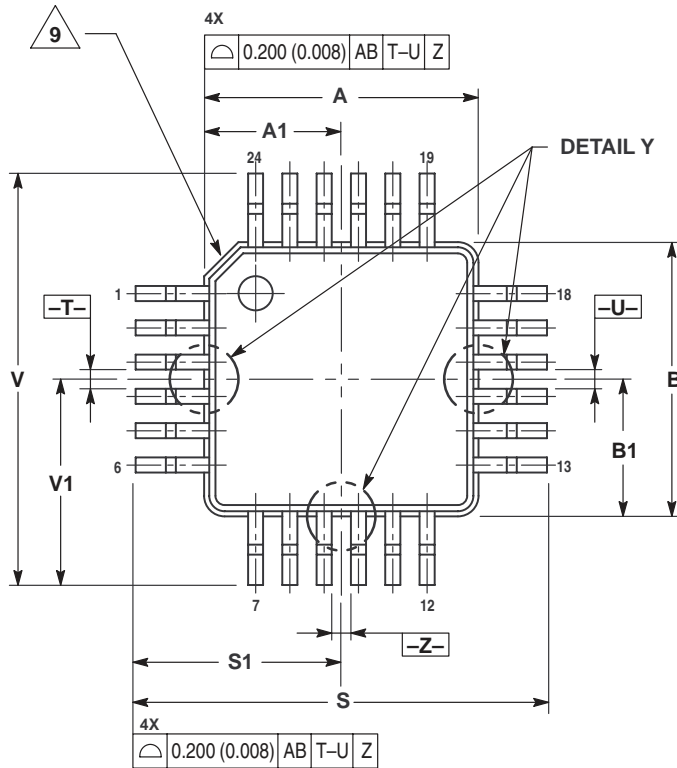

| DIM | MILLIMETERS |       | INCHES    |       |
|-----|-------------|-------|-----------|-------|
|     | MIN         | MAX   | MIN       | MAX   |
| A   | 4.000 BSC   |       | 0.157 BSC |       |
| A1  | 2.000 BSC   |       | 0.079 BSC |       |
| B   | 4.000 BSC   |       | 0.157 BSC |       |
| B1  | 2.000 BSC   |       | 0.079 BSC |       |
| C   | 1.400       | 1.600 | 0.055     | 0.063 |
| D   | 0.170       | 0.270 | 0.007     | 0.011 |
| E   | 1.350       | 1.450 | 0.053     | 0.057 |
| F   | 0.170       | 0.230 | 0.007     | 0.009 |
| G   | 0.500 BSC   |       | 0.020 BSC |       |
| H   | 0.050       | 0.150 | 0.002     | 0.006 |
| J   | 0.090       | 0.200 | 0.004     | 0.008 |
| K   | 0.500       | 0.700 | 0.020     | 0.028 |
| M   | 12° REF     |       | 12° REF   |       |
| N   | 0.090       | 0.160 | 0.004     | 0.006 |
| P   | 0.250 BSC   |       | 0.010 BSC |       |
| Q   | 1°          | 5°    | 1°        | 5°    |
| R   | 0.150       | 0.250 | 0.006     | 0.010 |
| S   | 6.000 BSC   |       | 0.236 BSC |       |
| S1  | 3.000 BSC   |       | 0.118 BSC |       |
| V   | 6.000 BSC   |       | 0.236 BSC |       |
| V1  | 3.000 BSC   |       | 0.118 BSC |       |
| W   | 0.200 REF   |       | 0.008 REF |       |
| X   | 1.000 REF   |       | 0.039 REF |       |

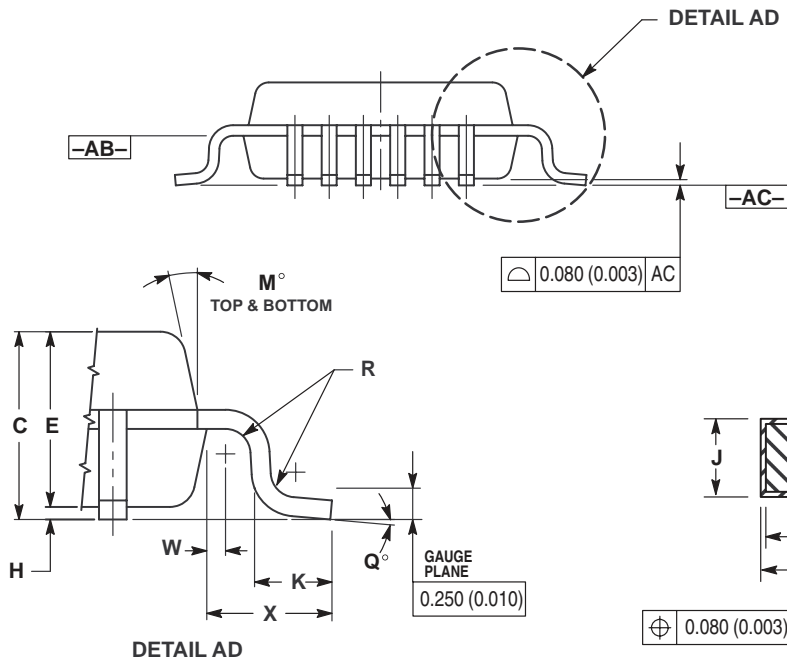


**N SUFFIX**  
**CASE 1212-01**  
 Plastic Package  
 (SOT-23)  
 ISSUE O

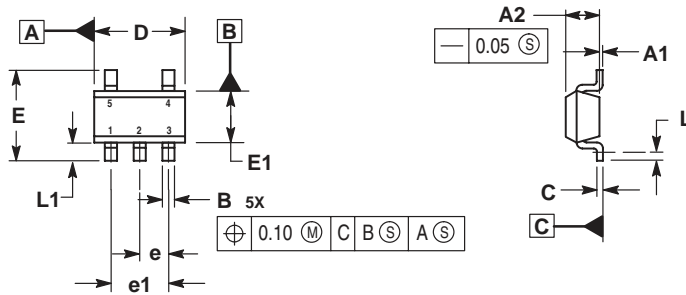

- NOTES:  
 1. DIMENSIONS ARE IN MILLIMETERS.  
 2. INTERPRET DIMENSIONS AND TOLERANCES PER ASME Y14.5M, 1994.  
 3. DATUM C IS A SEATING PLANE.

| MILLIMETERS |          |      |
|-------------|----------|------|
| DIM         | MIN      | MAX  |
| A1          | 0.00     | 0.10 |
| A2          | 1.00     | 1.30 |
| B           | 0.30     | 0.50 |
| C           | 0.10     | 0.25 |
| D           | 2.80     | 3.00 |
| E           | 2.50     | 3.10 |
| E1          | 1.50     | 1.80 |
| e           | 0.95 BSC |      |
| e1          | 1.90 BSC |      |
| L           | 0.20     | —    |
| L1          | 0.45     | 0.75 |

**H SUFFIX**  
**CASE 1213-01**  
 Plastic Package  
 (SOT-89)  
 ISSUE O

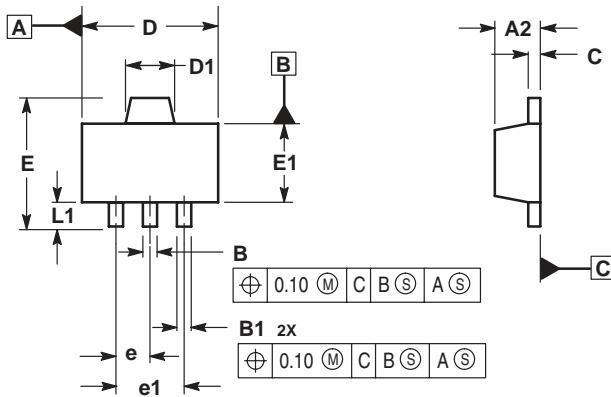

- NOTES:  
 1. DIMENSIONS ARE IN MILLIMETERS.  
 2. INTERPRET DIMENSIONS AND TOLERANCING PER ASME Y14.5M, 1994.  
 3. DATUM C IS A SEATING PLANE.

| MILLIMETERS |          |      |
|-------------|----------|------|
| DIM         | MIN      | MAX  |
| A2          | 1.40     | 1.60 |
| B           | 0.37     | 0.57 |
| B1          | 0.32     | 0.52 |
| C           | 0.30     | 0.50 |
| D           | 4.40     | 4.60 |
| D1          | 1.50     | 1.70 |
| E           | —        | 4.25 |
| E1          | 2.40     | 2.60 |
| e           | 1.50 BSC |      |
| e1          | 3.00 BSC |      |
| L1          | 0.80     | —    |