


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
E1		REVISED PER ECO-17-008114	13JUN2018	RS	DR

AMP WIRE RANGE	E13288 Listed	LR7189 Certified
22-16 AWG SOLID OR STRANDED	22-16 AWG SOLID OR STRANDED	22-16 AWG SOLID OR STRANDED

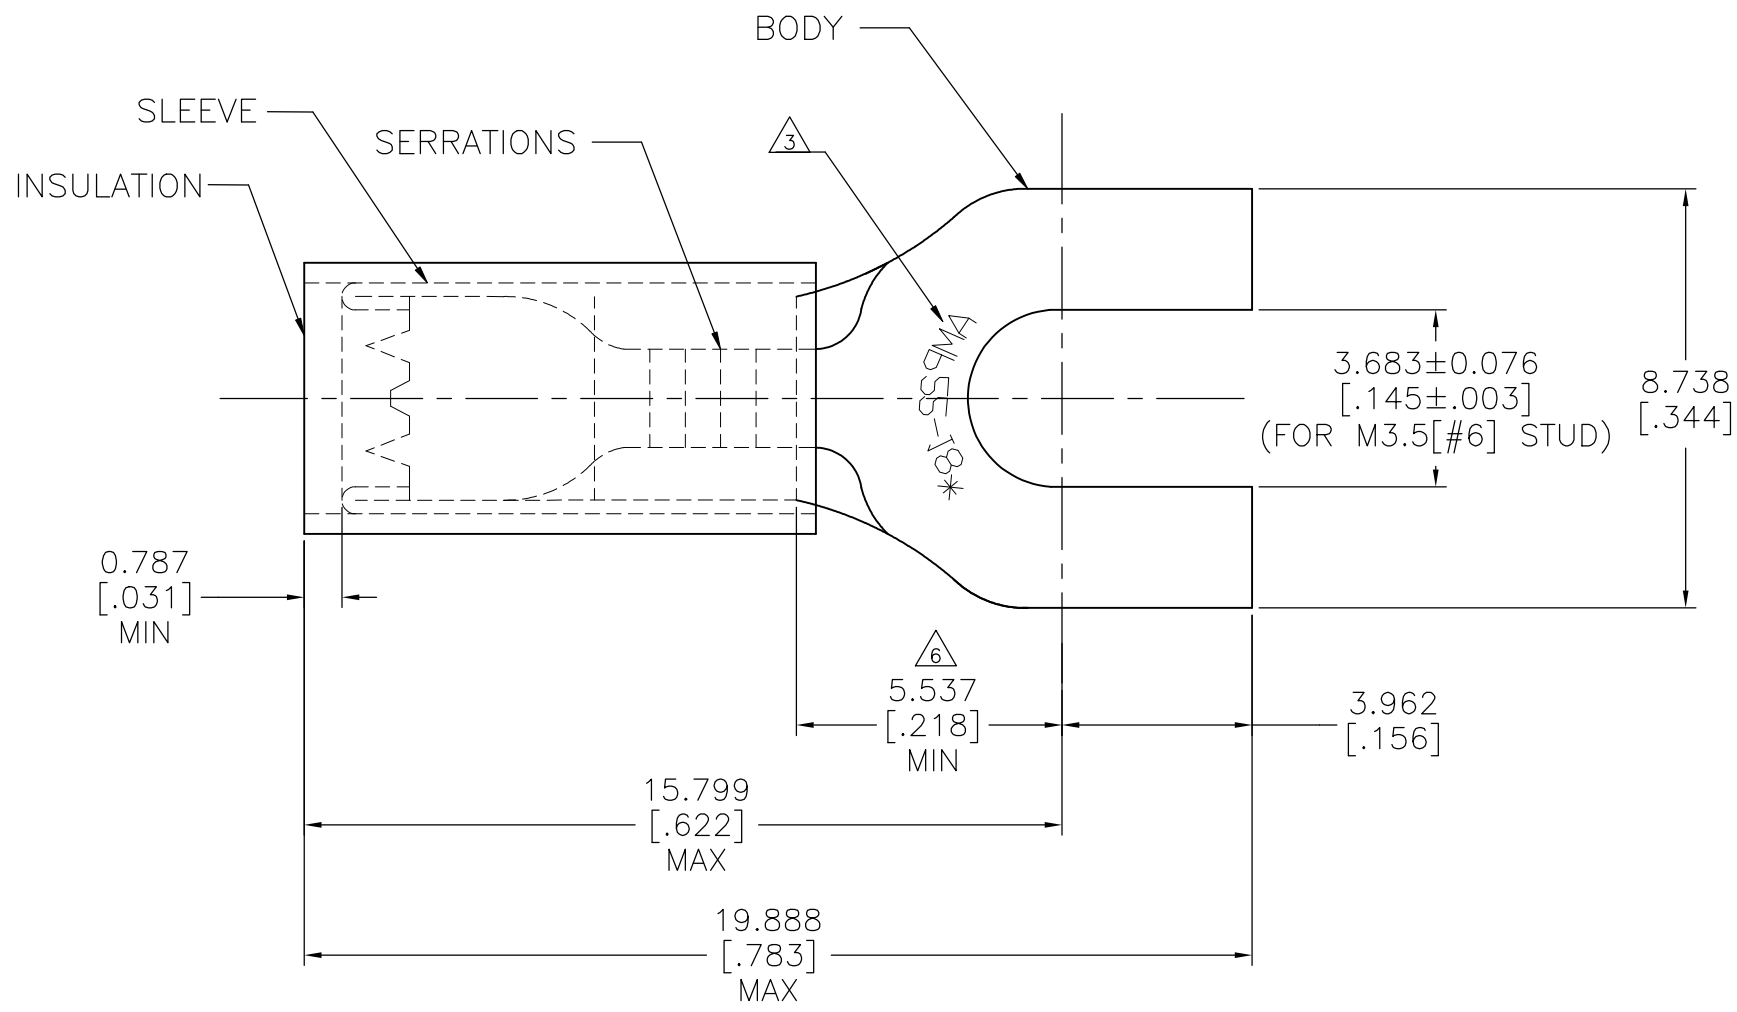

- 1 BODY MATERIAL THK: 0.787±0.051[.031±.002]
- 2 FOR 2.667 TO 3.556[.105 TO .140] WIRE INS. DIA
- 3 MARKING 22-18 FOR MILITARY COMMERCIAL RANGE 22-16
- 4 MATERIAL:
BODY & SLEEVE: COPPER PER ASTM B152
INSULATION: NYLON
- 5 FINISH:
BODY & SLEEVE: TIN PL PER ASTM B545
INSULATION: COLOR - RED
- 6 APPLIES FROM EDGE OF METAL WIRE BARREL TO CENTER OF STUD

1000	LOOSE PIECE	32404
QTY	PACKAGE TYPE	PART NO

AMP INCORPORATED CUSTOMER SERVICE SYSTEMS		THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN RAVI S 13JUN2018	TE Connectivity Ltd.		
FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS PRODUCT INFORMATION CENTER 1-800-522-6752		DIMENSIONS: mm [INCHES]		CHK ROHDE DANIEL 13JUN2018			
FOR APPLICATION TOOLING INFORMATION TOOLING ASSISTANCE CENTER 1-800-722-1111		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± 0.127[.005] 4 PLC ± - ± 5°		APVD ROHDE DANIEL 13JUN2018	SIZE A3		
FOR ORDER ENTRY 1-800-526-5142		MATERIAL 4		PRODUCT SPEC UL 486 A-B			
MAX RECOMMENDED OPERATING TEMPERATURE: 105°C [221°F]		FINISH 5		APPLICATION SPEC 114-2157	DRAWING NO C-32404		
VOLTAGE RATING: 300 V MAX				WEIGHT			
WIRE CROSS SECTIONAL AREA RANGE, 0.26-1.65mm ² [509-3,260] CIR MILS SOLID OR STRANDED				CUSTOMER DRAWING	SCALE NTS		
					REV E1		