

1. MATERIAL:

SHELL: AL ALLOY, ANODIZE INSERT AND RETAINING RING: THERMOPLASTIC SEAL: SILICONE RUBBER

2. MODIFICATIONS: THREADED HOUSING; NORMAL DIA. WIRE SEAL;

- 3. SPECIFICATIONS:
  - 3.1 OPERATING TEMPERATURE: -55°C TO +125°C.
  - 3.2 DIELECTRIC WITHSTANDING VOLTAGE: LESS THAN 2 MILLIAMPS CURRENT LEAKAGE @ 1500 VOLTS AC.
  - 3.3 INSULATION RESISTANCE: 1000 MEGOHM MIN @ 25°C.
  - 3.4 MOISTURE RESISTANCE:

IP68(IM OF WATER FOR A PERIOD OF 24 HOURS, MATED CONDITION); IP69K(MATED CONDITION).


- 3.5 MATING CYCLE DURABILITY: 100 CYCLES
- 3.6 RoHS COMPLIANT
- 4. MATING PART: AHDBM06-24-91S\* (\* = SEAL TYPE)
- 5. ALL DIMENSIONS ARE FOR REFERENCE USE ONLY.
- 6 CONTACT SIZE AND WIRE RANGE:

CONTACT	MIN. INSUL	MAX. INSUL	TYPICAL WIRE	CURRENT
SIZE	O.D.	O.D.	RANGE	RATING
8	4.83 mm (.190 in)	6.10 mm (.240 in)	8-10AWG (10.0-5.0mm²)	60AMPS
12	3.40 mm (.134 in)	4.32 mm (.170 in)	10-14AWG (6.0-2.0mm²)	25AMPS
16	2.54mm (.100 in)	3.40 mm (.134 in)	14-20AWG (2.0-0.5mm²)	13AMPS
	8 12	8 4.83 mm (.190 in) 12 3.40 mm (.134 in) 2.54mm	SIZE     O.D.     O.D.       8     4.83 mm (.190 in)     6.10 mm (.240 in)       12     3.40 mm (.134 in)     4.32 mm (.170 in)       2.54mm     3.40 mm	SIZE         O.D.         O.D.         RANGE           8         4.83 mm (.190 in)         6.10 mm (.240 in)         8-10AWG (10.0-5.0mm²)           12         3.40 mm (.134 in)         4.32 mm (.170 in)         10-14AWG (6.0-2.0mm²)           16         2.54mm         3.40 mm         14-20AWG

RECOMMENDED PANEL MOUNTING HOLE

RECOMMENDED PANEL THICKNESS:1.6 TO 4.7MM

7. MEET THE DIMENSION OF IMPLEMENT BUS BREAKAWAY CONNECTOR OF ISO 11783-2.

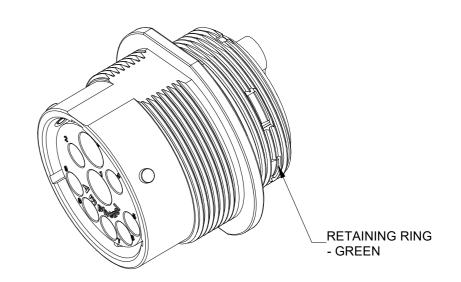

APPR

TOMMY

AHDBM04-24-91PN

	AHDBMC	4-24-91	PN	REF:HD34-24-91PN			1	
QUANTITY	PART N	NUMBER			DESCRIPTION	ITEM	1.	
	MATERIALS LIST						}	
	WISE SPECIFIED	SIG	NATURES	DATE	1 manhanal		1	
1) All dimensions a 2) Tolerances are a 1 PL DEC ±0.30		DRAWN:	IAN	04/JAN/22	Amphenol			
2 PL DEC ±0.15 3 PL DEC ±0.08	Angles ±1°	CHECKED:	SULLEN	04/JAN/22	Sine Systems - www.amphenol-sine.com			
3) Note reference	<b>-</b> X	ENGINEER:			44724 Morley Drive			
MATERIAL SPECIFICA	TIONS:	APPROVAL:	TOMMY	05/JAN/22	Clinton Township, MI 48036			
		CUSTOMER:			09POS,RECEPTACLE,PIN,24SZ,NORMAL SEAL,			
			NG IS SUPPLIED F		BREAK AWAY,DURAMATE AHDBM			
PROCESS SPECIFICA	TIONS:	SPECIFICATION SHOWN HERE THE AMPHEN OF REPRODU	ONS AND PERFO EON ARE THE PR	REFORMANCE DATA PROPERTY OF B TYPE B TYPE AHDBM04-24-91PN TATION NO RIGHTS MPLIED. ALL TATION NO RIGHTS		A1		
NEXT ASS'Y:			RING VARIATION	S.	SCALE: NONE DURAMATE SHEET 1 OF	1		

## **AT Series™** - Contact Size 16 Options

Machined Contacts, Sockets & Pins							
Part Number	Part Number Description			Туре			
AT60-215-1631	Male Contact - Pin, Gold-plated	16	14	Machined			
AT62-209-1631	Female Contact - Socket, Gold-plated	16	14	Machined			
AT60-215-16141	Male Contact - Pin, Nickel-plated	16	14	Machined			
AT62-209-16141	Female Contact - Socket, Nickel-plated	16	14	Machined			
AT60-202-1631	Male Contact - Pin, Gold-plated	16	16-20	Machined			
AT62-201-1631	Female Contact - Socket, Gold-plated	16	16-20	Machined			
AT60-202-16141	Male Contact - Pin, Nickel-plated	16	16-20	Machined			
AT62-201-16141	Female Contact - Socket, Nickel-plated	16	16-20	Machined			
AT60-202-1631-22	Male Contact - Pin, Gold-plated	16	22-24	Machined			
AT62-201-1631-22	Female Contact - Socket, Gold-plated	16	22-24	Machined			
AT60-202-16141-22	Male Contact - Pin, Nickel-plated	16	22-24	Machined			
AT62-201-16141-22	Female Contact - Socket, Nickel-plated	16	22-24	Machined			

Tooling - Machined Contacts				
Part	Part Number	Description		
	CA-5D12	Universal Hand Crimp Tool, Size 12/16/20 (Machined contacts only)		
33	CA-5E12	Pneumatic Crimp Tool, Size 12/16/20 (Machined contacts only)		

Contact Removal Tools					
Part	Part Number	Description			
	ATRT-100	Used for removal of contacts for A Series™ products			
	AT11-310-1605	Contact Removal Tool, Plastic, Size 16			
4	A114017	Sealing Plug, Size 16, White			

Stamped & Formed Contacts, Sockets & Pins						
Part Number	Description	Size	AWG	Туре		
AT60-14-0144	Male Contact - Pin, Gold-plated	16	14-16	Stamped & Formed		
AT62-14-0144	Female Contact - Socket, Gold-plated	16	14-16	Stamped & Formed		
AT60-14-0122	Male Contact - Pin, Nickel-plated	16	14-16	Stamped & Formed		
AT62-14-0122	Female Contact - Socket, Nickel-plated	16	14-16	Stamped & Formed		
AT60-16-0144	Male Contact - Pin, Gold-plated	16	16-18	Stamped & Formed		
AT62-16-0144	Female Contact - Socket, Gold-plated	16	16-18	Stamped & Formed		
AT60-16-0122	Male Contact - Pin, Nickel-plated	16	16-18	Stamped & Formed		
AT62-16-0122	Female Contact - Socket, Nickel-plated	16	16-18	Stamped & Formed		
AT60-16-0644	Male Contact - Pin, Gold-plated	16	18-20	Stamped & Formed		
AT62-16-0644	Female Contact - Socket, Gold-plated	16	18-20	Stamped & Formed		
AT60-16-0622	Male Contact - Pin, Nickel-plated	16	18-20	Stamped & Formed		
AT62-16-0622	Female Contact - Socket, Nickel-plated	16	18-20	Stamped & Formed		
AT60-16-0844	Male Contact - Pin, Gold-plated	16	20-22	Stamped & Formed		
AT62-16-0844	Female Contact - Socket, Gold-plated	16	20-22	Stamped & Formed		
AT60-16-0822	Male Contact - Pin, Nickel-plated	16	20-22	Stamped & Formed		
AT62-16-0822	Female Contact - Socket, Nickel-plated	16	20-22	Stamped & Formed		

Tooling - Stamped & Formed Contacts				
Part	Part Number	Description		
	MFX-3950	Crimp Die - Size 16, 18-20AWG (S&F contacts only)		
	MFX-3953	Crimp Die - Size 16, 16-18AWG (S&F contacts only)		
	MFX-3975	Crimp Die - Size 16, 14-16AWG (S&F contacts only)		
	MFX-3990	Crimp Die - Size 16, 20-22AWG (S&F contacts only)		
	ATT-16-00	Hand Crimp Tool - Size 16, 14-16AWG (S&F contacts only)		
K	ATT-16-01	Hand Crimp Tool - Size 16, 18-20AWG (S&F contacts only)		
	ATT-1612-03	Hand Crimp Tool - Size 16, 20-22AWG (S&F contacts only)		

Amphenol Sine Systems 44724 Morley Drive Clinton Township, MI 48036 USA www.amphenol-sine.com 09/2021

## MagnaMate™ ATHP - DuraMate™ AHDP - DuraMate™ AHDM Series - Contact Size 12 Options

Machined Contacts, Sockets & Pins						
Part Number	Description	Size	AWG	Туре		
AT60-204-12141-10	Male Contact - Pin, Nickel-plated	12	10-12	Machined		
AT62-203-12141-10	Female Contact - Socket, Nickel-plated	12	10-12	Machined		
AT60-220-1231	Male Contact - Pin, Gold-plated	12	12-14	Machined		
AT62-210-1231	Female Contact - Socket, Gold-plated	12	12-14	Machined		
AT60-204-12141	Male Contact - Pin, Nickel-plated	12	12-14	Machined		
AT62-203-12141	Female Contact - Socket, Nickel-plated	12	12-14	Machined		

DiagnosticGrade™ Machined Contacts, Sockets & Pins  • Smaller AWG for Diagnostic Applications • Gold-plated • Increased Mating Cycles • Cost-effective						
Part Number	umber Description Size AWG Type					
65-54749	Male Contact - DiagnosticGrade™, Pin, Gold-plated	12	20	Machined		
AT62-210-1231-1820	Female Contact - DiagnosticGrade™, Socket, Gold-plated	12	20	Machined		

Tooling - Machined Contacts				
Part	Part Number	Description		
	CA-5D12	Universal Hand Crimp Tool, Size 12/16/20 (Machined contacts only)		
33	CA-5E12	Pneumatic Crimp Tool, Size 12/16/20 (Machined contacts only)		

Contact Removal Tools			
Part	Part Number	Description	
	AT11-337-1205	Contact Removal Tool, Plastic, Size 12	
	A114017	Sealing Plug, Size 12, White	

Stamped & Formed Contacts, Sockets & Pins							
Part Number	Description	Size	AWG	Туре			
AT60-12-0244	Male Contact - Pin, Gold-plated	12	10-12	Stamped & Formed			
AT62-12-0244	Female Contact - Socket, Gold-plated	12	10-12	Stamped & Formed			
AT60-12-0222	Male Contact - Pin, Nickel-plated	12	10-12	Stamped & Formed			
AT62-12-0222	Female Contact - Socket, Nickel-plated	12	10-12	Stamped & Formed			
AT60-12-0144	Male Contact - Pin, Gold-plated	12	12-14	Stamped & Formed			
AT62-12-0144	Female Contact - Socket, Gold-plated	12	12-14	Stamped & Formed			
AT60-12-0166	Male Contact - Pin, Nickel-plated	12	12-14	Stamped & Formed			
AT62-12-0166	Female Contact - Socket, Nickel-plated	12	12-14	Stamped & Formed			

Tooling - Stamped & Formed Contacts					
Part	Part Number	Description			
	MFX-3973	Crimp Die - Size 12 (S&F contacts only)			
	MFX-3985	Crimp Die - Size 12 (S&F contacts only) 10-12AWG -02XX Series			
	ATT-12-00	Hand Crimp Tool - Size 12, 12AWG (S&F contacts only)			
	ATT-12-01	Hand Crimp Tool - Size 12, 10AWG (S&F contacts only)			

Amphenol Sine Systems 44724 Morley Drive Clinton Township, MI 48036 USA www.amphenol-sine.com 01/2022

## **ATHD Series™** - Contact Size 8 Options

Machined Contacts, Pins and Sockets					
Part Number	Description	Size	AWG	Туре	Amps
AT60-204-08141	Male Contact - Pin, Copper Alloy, Nickel-Plated	8	8-10	Machined	60A
AT62-203-08141	Female Contact - Socket, Copper Alloy, Nickel-Plated	8	8-10	Machined	60A
AT60-204-08141-16	Male Contact - Pin, Copper Alloy, Nickel-Plated	8	6	Machined	60A
AT62-203-08141-16	Female Contact - Socket, Copper Alloy, Nickel-Plated	8	6	Machined	60A

Tooling - Machined Contacts					
Part	Part Number	Description			
	WA23	Heavy Duty Pneumatic Crimp Tool -Uses Universal Positioner Part No. WA23-101DA and Crimp Locator MFX-3961			
	WA23-2	Die Assembly -for CA-5E12 Heavy Duty Pneumatic Crimp Tool, Size 8			
	WA23-3	Die Assembly -for CA-5E12 Heavy Duty Pneumatic Crimp Tool, Size 6			
mas	WA23-10	Contact Locator, Size 6 and Size 8			
THE THE THE	96-978-22	Crimper and Dies -for Size 10mm²-185mm² Wires			

Contact Removal Tools				
Part	Part Number	Description		
	AT114008	Contact Removal Tool, Plastic, Size 8, 8-10AWG		