



UNIT : MM

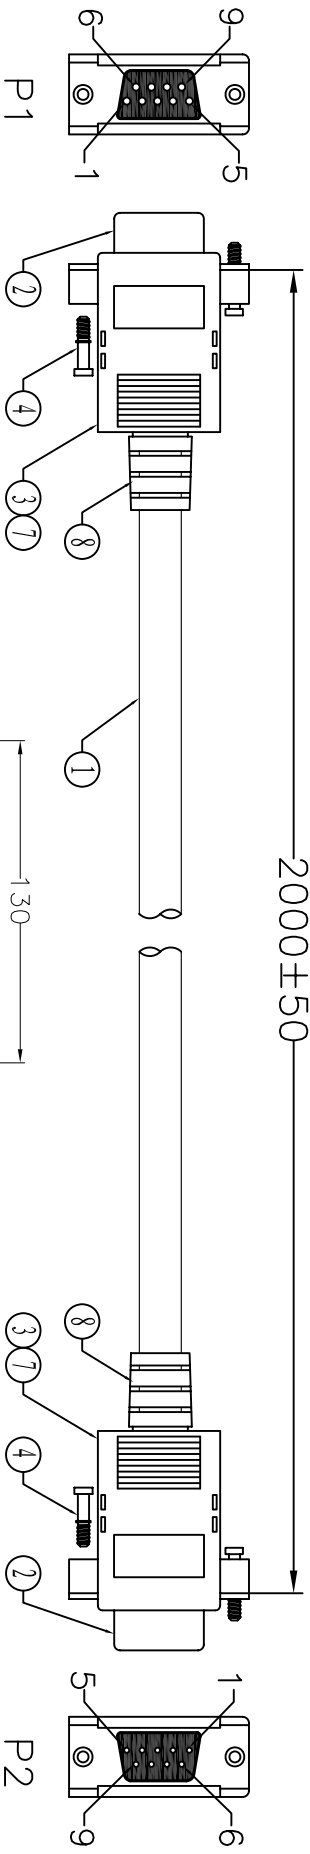

PIN ASSIGNMENT	
P1	P2
1 BLACK	1
2 GREY	2
3 YELLOW	3
4 PURPLE	4
5 ORANGE	5
5 RED	5
7 BROWN	7
8 GREEN	8
9 BLUE	9
SHELL	9
	DRAIN
	SHELL

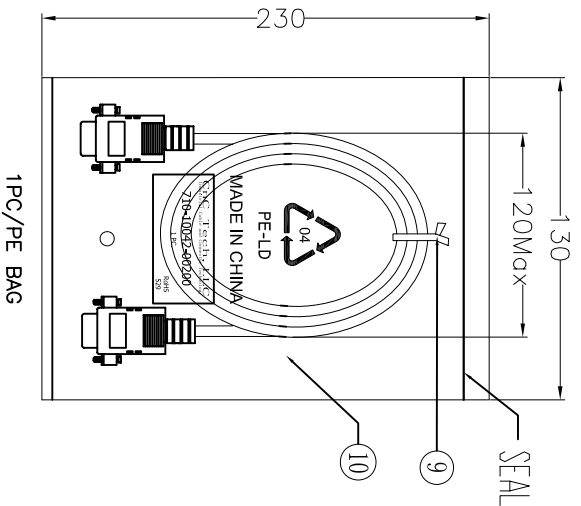

Electrical test:
 1. 100% short, open, miswire test
 2. Conduct resistance: 2 Ohm(max)
 3. Insulation resistance: 5Mohm(min)
 4. dielectric test: DC 300V

⑨	TIE	1	WHITE TIE L=80MM
⑩	S/R	5.5g	BEIGE(IV-29#) 45P PVC (MOULD NO.SR-50)
⑦	TUBE	2	HEAT SHRINK TUBE BLACK OD:0.6*20mm
⑥	PE BAG	1/10	CLEAR SIZE:280*330*0.05mm PRINT BLACK"MADE IN CHINA"+"10PCS"及印生产周期,有透气孔.
⑤	PE BAG	1	CLEAR SIZE:130*230*0.05mm PRINT BLACK"MADE IN CHINA"+"1Pc"及印生产周期,有透气孔.
④	SCREW	4	SCREW #4-40UNC L=12.5mm,NICKEL PLATED
③	DKN	2set	DB9P DKN W/O NUT BEIGE
②	CONN	2	DB 9P FEMALE SOLDER TYPE G/F ,BLUE INSULATION,SHELL-NICKEL.
①	CABLE	1	NOUL 30AWG(7/0.10)*9C+D+AL OD5.0mm COLOR BEIGE(IV-29#) L=2000± 15MM

Cnc Tech, LLC
 Industrial Cable and Connector Technology

DRAWN BY	ZHONGHS	DRAWING NO.	
CHECKED BY		CUSTOMER	
APPROVAL BY		ITEM NO.	710-10042-00200
DATE		DATE	2012-02-17
VERSIONS/EDITION	A/0	PROJECT	

4 3 2 1 4 3 2 1