




REVISIONS			
REV	DESCRIPTION, ECN, EAR NO.	DATE	APP'D
A	PROPOSAL	JAN16/19	L.CHAN

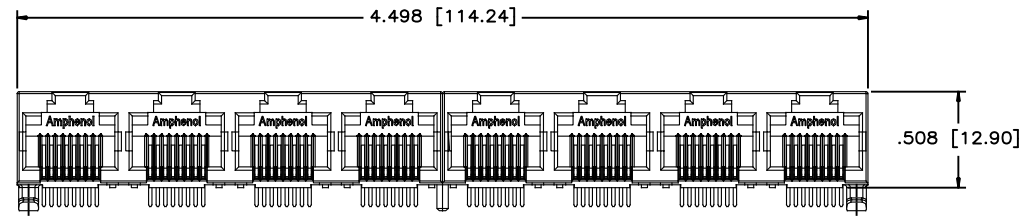

TOP VIEW

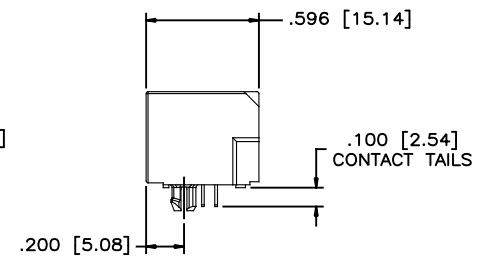


SIDE VIEW

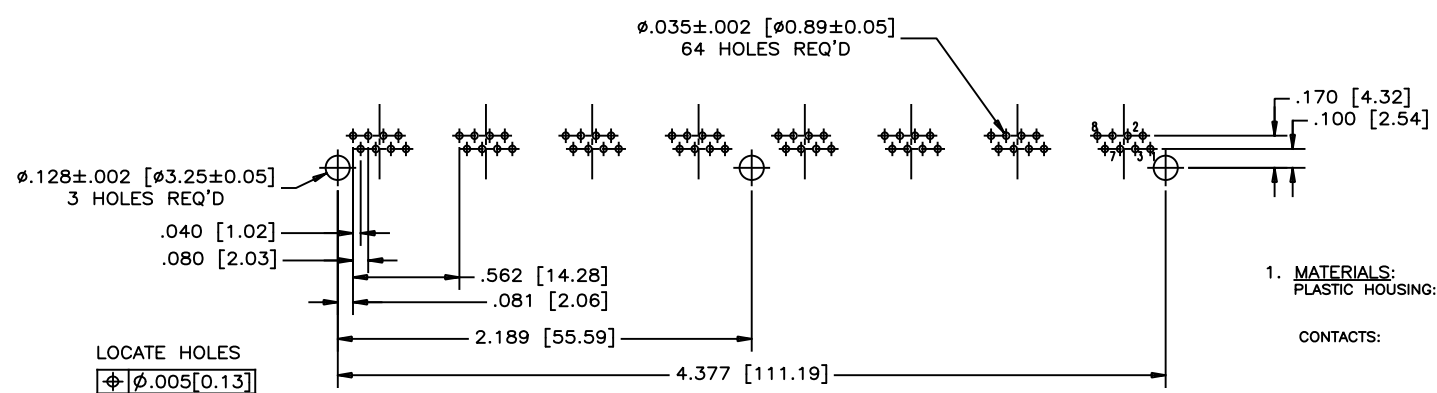

RECOMMENDED P.C.B. LAYOUT  
(COMPONENT SIDE OF BOARD)

- MATERIALS:**  
 PLASTIC HOUSING: HIGH TEMPERATURE THERMOPLASTIC  
 FLAMMABILITY RATING UL 94V-0, COLOUR: BLACK  
  
 CONTACTS: PHOSPHOR BRONZE  
 PLATING: SELECTIVE GOLD PLATING ON MATING SURFACES,  
 SEE AMPHENOL PART NUMBER FOR DETAIL.  
 50 μ" [1.27 MICRONS] MIN. NICKEL UNDERPLATE  
 100 μ" [2.54 MICRONS] MIN. MATTE TIN ON CONTACT TAILS
- RECOMMENDED SOLDERING TEMPERATURE:**  
 WAVE SOLDERING AT 260° C MAXIMUM FOR 5 SEC MAXIMUM.
- PART NUMBER:** RJE39-888-0X00  
 GOLD PLATING OPTION  
 0=GOLD FLASH  
 1=6u" GOLD PLATING  
 2=15u" GOLD PLATING  
 3=30u" GOLD PLATING  
 4=50u" GOLD PLATING

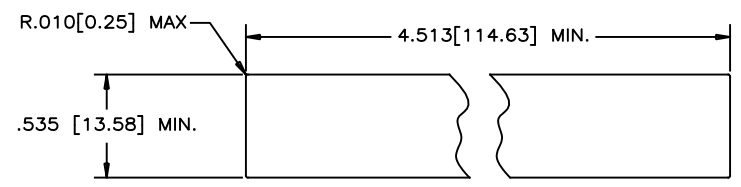

RECOMMENDED PANEL CUTOUT

UNLESS SPECIFIED OTHERWISE		DRAWN	W.QIU	DATE	JAN16/19
PRIMARY UNITS	INCH	CHECKED	L.CHAN	DATE	JAN16/19
SECONDARY	MILLIMETER	M.E.	APP'D		
REFERENCE IN PARENTHESES		Q.A.	APP'D		
GENERAL TOLERANCES		DWG APPR.			
1 DECIMAL PLACE	±0.025	ENG. REL. NO.			
2 DECIMAL PLACES	±0.020	REF.			
3 DECIMAL PLACES	±0.015	THIRD ANGLE PROJECTION			
ANGULAR DEGREES	±1.0°	DO NOT SCALE DRAWING			

**Amphenol Canada Corp.**  
Commercial Products

TITLE  
8 PORT HIGH SPEED MODULAR JACK,  
8 POSITIONS, 8 CONTACTS, UNSHIELDED,  
WITHOUT LEDS- RoHS COMPLIANT

DWG. NO. P-RJE39-888-0X00 REV A

CODE ID NO. 03554 DWG SIZE: C SCALE: N/A SHEET 1 OF 1

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION AND SUCH INFORMATION MAY NOT BE DISCLOSED TO OTHERS FOR ANY PURPOSE OR USED FOR MANUFACTURING PURPOSES WITHOUT WRITTEN PERMISSION FROM AMPHENOL CANADA CORP.