

MATERIALS AND FINISHES

COUPLING NUT ZINC ALLOY  
PLATED NICKEL

BODY, WASHER BRASS  
PLATED NICKEL

CENTER CONTACT BRASS  
PLATED GOLD

INSULATOR TEFLON



GASKET SILICONE RUBBER

WAVE WASHER BERYLLIUM COPPER  
PLATED NICKEL

RESISTOR  
75 OHMS ±1.0% 1/4 WATT

ELECTRICAL CHARACTERICS

RETURN LOSS ≤45 dB @ 5 MHZ  
≤20 dB @ 100 MHZ

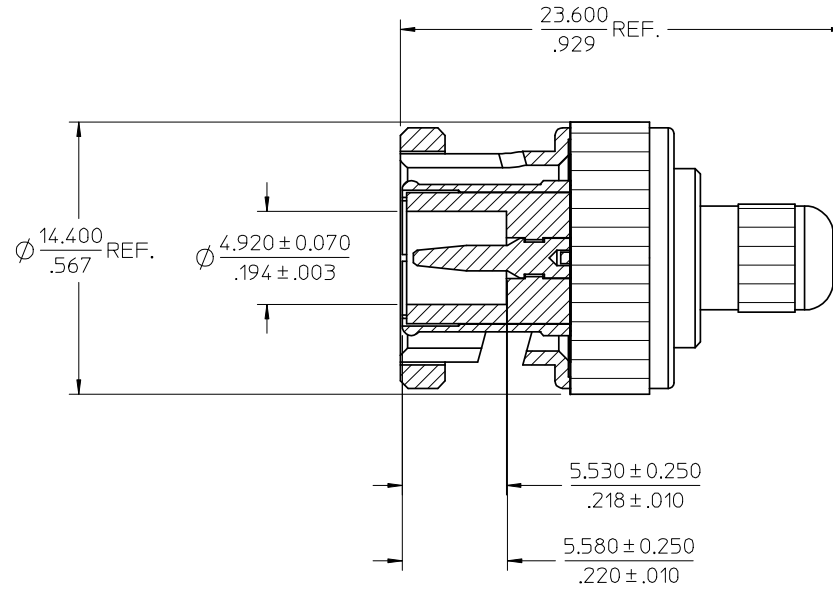

MIL-STD-348A, FIG. 301.1	INTERFACE
SPECIFICATION	DESCRIPTION

REDRAWING AND CHANGE  
 RESISTOR ±1% WAS ±0.1%  
 REF: UFF 2008-05-26

DRW: NIELIN 2008/05/20	QUALITY SYMBOLS
CHKD: CHIKD 2008/05/26	▼=0
APPR: MHIANG 2008/05/26	▽=0
REV	DESCRIPTION

GENERAL TOLERANCES (UNLESS SPECIFIED)	
mm	INCH
4 PLACES ± .010	± .0004
3 PLACES ± .015	± .0006
2 PLACES ± .020	± .0008
1 PLACE ± .030	± .0012
ANGULAR ± 2°	
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	

DIMENSION STYLE	
MM/IN	
DRAWN BY	DATE
DENG	1992/12/28
CHECKED BY	DATE
--	1992/12/28
APPROVED BY	DATE
--	1992/12/28
MATERIAL NO.	DOCUMENT NO.
731697001	SD-73169-7001
SIZE	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION
	METRIC	☉
TITLE		
BNC PLUG TERMINATOR 75 OHMS 1/4 WATT BNC-P		
MOLEX INCORPORATED		SHEET NO.
SD-73169-7001		1 OF 1