


Force Gauge PCE-DFG N 5

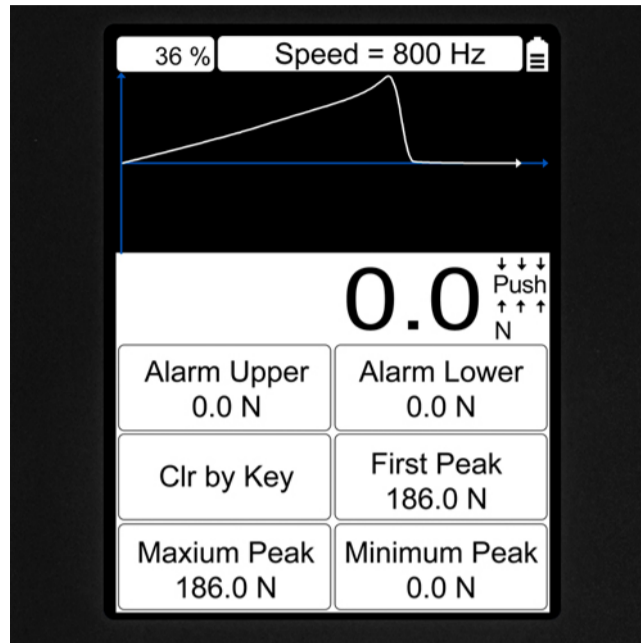

PCE-DFG N 5 Force gauge

For tensile force measurement and pressure force measurement up to 5 N / Very high accuracy / Sampling rate 1600 Hz / 6 different measuring tips / USB interface / Software / Calibration certificate

A digital force gauge for tensile and compressive force measurements up to 5 N is available with the PCE-DFG N 5. The PCE-DFG N 5 is a digital force meter for precise measurements with a resolution of 0.001 N. The measured values are displayed on a large, illuminated, 180° rotatable display, a correct reading of the measured values is thus guaranteed at all times. The outstanding accuracy of $\pm 0.1\%$ FS is confirmed with the factory calibration certificate provided.

In addition to the internal storage option of 100 measured values, a USB interface is available for data transmission. With the software, the measured values can be saved on a computer for later evaluation. Due to its robust housing, a sensible menu navigation and the simple operation via 8 keys, the digital force meter PCE-DFG N 5 is characterized by a high degree of user-friendliness. The power supply of the dynamometer via batteries, which can be charged via a included charger and allow a continuous operation of the device of 10 hours. With these characteristics, the digital force gauge is suitable for quality control in the production area, for incoming and outgoing inspection as well as for the development of new components or for testing safety-relevant components.

- ▶ Pull and pressure force measurement
- ▶ 1600 Hz sampling rate
- ▶ Error limit 0.1% of the measuring range
- ▶ PEAK function (MIN / MAX)
- ▶ Limit value function
- ▶ Different measuring units
- ▶ Automatic or manual storage
- ▶ Graphical analysis
- ▶ Automatic orientation display
- ▶ Time date
- ▶ Control and evaluation software
- ▶ Automatic shutdown adjustable
- ▶ Battery status indicator
- ▶ Network operation possible
- ▶ Save 100 readings
- ▶ **Incl. ISO calibration certificate**

Subject to change

Specifications

Measuring range	0 ... 5 N, 0 ... 1.12 lbs
Accuracy	± 0.1% of the measuring range
Resolution	0.001 N
Measurement units	N, kg, lb, KPa
Display	2.8" TFT graphic display
Alarm Modes	Inside, Outside, Crack, Shutdown
Sampling rate	6 ... 1600 Hz
Storage	100 measurements
Power supply	NiMh battery 6V / 1600-mAh
Battery life	About 10 hours
Charging adapter	12V / 1A
Outputs	Interface: USB Switching output: 12V / 50-mA
Protection class	IP 54
Operating and storage conditions	-10 ... 50°C / 14 ... 122°F 5 ... 95% rh non-condensing
Force-receiving piece	M6 x 7 mm
Dimensions	200 x 97 x 42 mm / 7.9 x 3.8 x 1.7 in
Weight	540 g / 1.2 lbs

More information

Manual



Software Manual



Video



More product info



Similar products



Subject to change