



Rev	AWO #	Description	Date	Appr
-		RELEASED	3/24/21	
A		UPDATE DIM.	6/10/21	JJ

APPROVED: _____
 DATE: _____ TITLE: _____

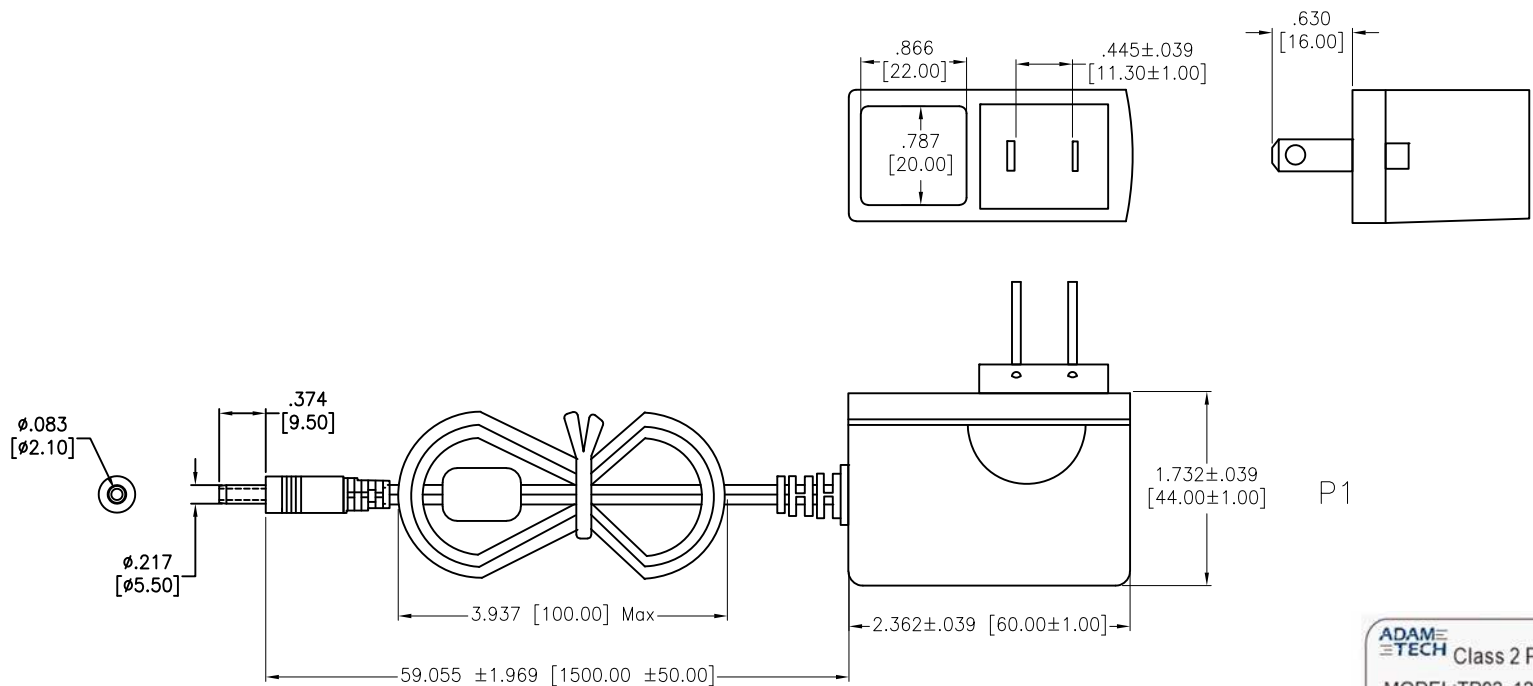

SPECIFICATIONS:
 Connector
P1: Power Adapter, W/Strain Relief, NEMA 1-15P
P2: DC Plug, W/Strain Relief, 5.5*2.1*9.5mm
 CABLE:
UL2468: 22AWG
 Electrical:
Input:
 Voltage: 100Vac to 240Vac
 Current: 0.35A Max. @ 90~264Vac input & max load
 Frequency: 50Hz / 60Hz
Output:
 Voltage: 12V
 Current: 1.0A max.
 Line Regulation: ±5%
 Fire rating: UL94V-0
 Line Load Regulation-Output Rate: 12V, 1.0A
 Insulator Resistance: 10 Mohms min @ 500VDC
 Dielectric Strength(Hi-pot): 3000Vac For 1 Minute
 Leakage Current: 0.25mAmax.@ 230Vac/50Hz
 Temperature Rating:
 Operating Temperature: 0°C to +40°C
 Storage Temperature: -40°C to +70°C
 Environmental:
 Lead free, RoHS compliant.



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]. TOLERANCES: EXCEPT AS NOTED		
INCHES HOLES		
.X ± .10	ØX ± .10	
.XX ± .020	ØXX ± .015	
.XXX ± .015	ØXXX ± .010	
DRAWN	WX	3/24/21
CHECKED	AC	3/24/21
APPROVED		
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY AND SHOULD NOT BE USED WITHOUT PRIOR WRITTEN PERMISSION FROM ADAM TECH		

ADAM TECH 909 Rahway Avenue,
 Union, NJ 07083
 Phone: 908-687-5000
 Fax: 908-687-5710

TITLE POWER ADAPTER, COLOR BLACK 12 VOLT, 1.0AMP,UL2468 22AWG, 5.5X2.1X9.5MM		
SIZE X	PART NO. PA-013	REV. A
REF:	SCALE: NTS	SHEET 1 OF 1