


ITEM NO.	PART NUMBER	DESCRIPTION	QTY.	COMPONENT NOTES
1	50-00315	Connector, dc plug, 3.5x1.35xL20mm, brass, nickel plated, molding type, white insulators	1	
2	50-00057	Connector, dc jack, 3.5x1.35xL16.5 mm, molding style	1	
3	30-00405	Wire, 2C TS, 24 AWG, UL2468, 300V, 80C, 3.0 mm, VW-1, PVC, 87A, white	1	
4	24-00002	Overmold, PVC, white	1	
5	24-00005	Overmold, PVC, white	1	

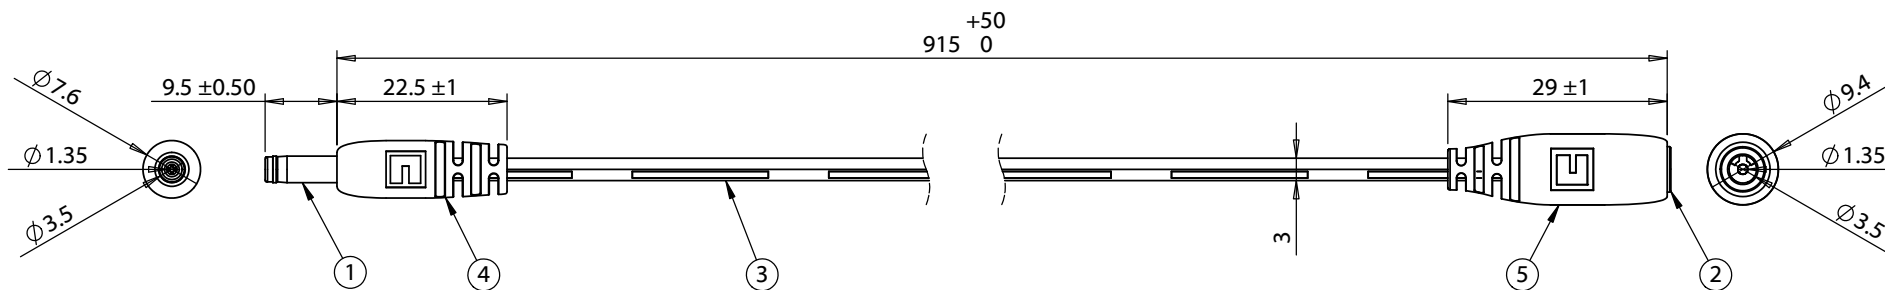

Notes:
 Cables individually tied and bundled in groups of 10
 Functionally equivalent components may be substituted
 4 A, 12 Vdc

Wiring Diagram		
50-00315	wire color	50-00057
center	white with stripe	center
sleeve	white	sleeve

Revision:	Date:	Description:	Prepared:	Notes:	<h1>TENSILITY</h1> <p>tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com</p>				
A	12/16/2015	Initial release	GL 2016.05.18 15:49:07 -07'00'			RoHS compliant			
			Verified:	Function test: no open, no short circuit, no intermittent	<table border="1"> <tr> <td>Size:</td> <td>Part number:</td> </tr> <tr> <td>A</td> <td>10-01258</td> </tr> </table>	Size:	Part number:	A	10-01258
Size:	Part number:								
A	10-01258								
			LA Digitally signed by LA DN: cn=LA, o=Tensility Inc Engineering email=LA@Tensility.com, c=US Date: 2016.06.01 17:04:39 -07'00'	Description: Cable, 915 mm, 3.5x1.35x9.5mm 50-00315 plug to 3.5x1.35mm 50-00057 jack, 24 AWG, 30-00405, white	<table border="1"> <tr> <td>Scale:</td> <td>1:2</td> <td></td> <td>Sheet 1 of 1</td> </tr> </table>	Scale:	1:2		Sheet 1 of 1
Scale:	1:2		Sheet 1 of 1						
			Dimensions are in millimeters. Tolerances: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm						

5 4 3 2 1