

NOTES:


- METALSHELLS: STEEL; min. 315µin TIN over 40-80µin NICKEL
- INSULATORS: PBT GF UL 94 V-0, GREEN
- SIGNAL CONTACTS: COPPER ALLOY
PLATING: GOLD FLASH over NICKEL
- NO CONTACTS ON POS. A1 + A2
- THREADED LOCKS: COPPER ALLOY; min.200µin TIN over 80µin NICKEL
- METAL BRACKETS: ZINC DIE CAST; 300µin COPPER/40-120µin NICKEL/120-200µin TIN
- P.C.B. HOLE DRILLINGS ON SHEET 2
- MAXIMUM TORQUE VALUE FOR THREAD: 6 in.LB
- CONNECTOR IS PART MARKED: 3017W2PAT99P20X CONEC ABC

Directive 2002/95/EC RoHS compliant

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH DO NOT ALTER CAD DRAWING BY HAND	tolerance		dim. in mm	scale: 2:1 (5:1)	
				material: SEE NOTES	
	date	name		title: D-SUB COMBINATION MALE 90° 17W2P with threaded lock and metal bracket	
	drawn 29.05.12	Henneboel			
	appd. 29.05.12	Koch			
	norm			dwg no:	
d-old			13K1A3979		
rev. a	Original			DIN-A3	
description	date			sh: 1/2	
part no:			3017W2PAT99P20X		

P.C.B. HOLE DRILLINGS

(P.C.B. TOP SIDE)

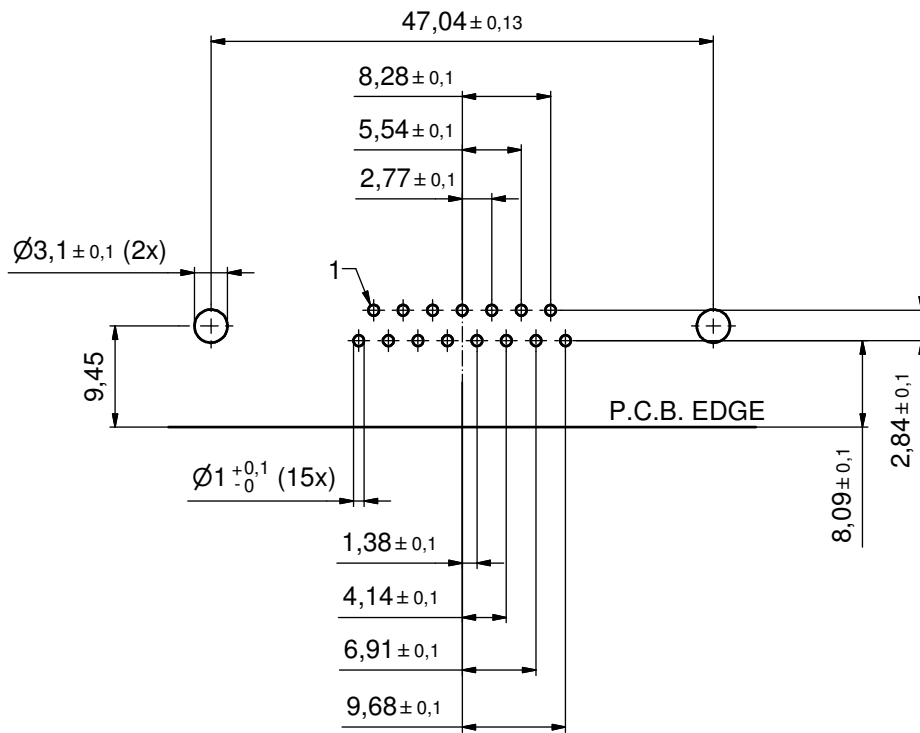

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH DO NOT ALTER CAD DRAWING BY HAND				tolerance		scale: 2:1
				dim. in mm		material: SEE SHEET 1
	drawn	29.05.12	Henneboel	title:		
	appd.	29.05.12	Koch	P.C.B. HOLE DRILLINGS		
	norm			D-SUB COMBINATION MALE 90° 17W2P		
	d-old			with threaded lock and metal bracket		
rev.	a	Original	CONEC [®]			dwg no:
description						13K1A3979
date			part no:	SEE SHEET 1	sh: 2/2	
name						