

# Balanced <sup>top hat</sup> RF Transformer

75Ω 10 to 1800 MHz

## TRS1-182-75+

### Features

- suitable for tin/lead and RoHS solder systems
- wideband, 10 to 1800 MHz
- balanced transmission line
- good return loss, 20 dB typ. at 1 dB band
- excellent amplitude unbalance, 0.3 dB typ.
- aqueous washable
- excellent intermod suppression



Generic photo used for illustration purposes only

CASE STYLE: TT1618-1

#### +RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

#### Available Tape and Reel at no extra cost

Reel Size	Devices/Reel
7"	10, 20, 50, 100, 200
13"	500

### Electrical Specifications at 25°C

Parameter	Frequency (MHz)	Min.	Typ.	Max.	Unit
Impedance Ratio			1		Ohm
Frequency Range		10		1800	MHz
Insertion Loss*	50 -1200	—	0.6	1.0	dB
	10-1800	—	0.9	2.0	
Amplitude Unbalance	50-1000	—	0.3	0.7	dB
	1000-1200	—	0.5	0.7	
Phase Unbalance	10-1800	—	0.7	1.4	Degree
	50-1000	—	2	4	
Primary Return Loss (Input)	1000-1200	—	3	8	dB
	10-1800	—	7.5	15	
	50-500	16	22	—	
	500-1000	13	20	—	
Primary Return Loss (Input)	1000-1200	13	20	—	dB
	10-1800	8	12.5	—	

\*Insertion Loss is referenced to mid-band loss, 0.25 dB typ.

### Maximum Ratings

Parameter	Ratings
Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power	1W
DC Current	30mA


Permanent damage may occur if any of these limits are exceeded.

Demo Board MCL P/N: TB-789+


### Pin Connections

Function	Pin Number
PRIMARY DOT	4
PRIMARY	1
SECONDARY DOT	2
SECONDARY	3


### Product Marking



### Config. K

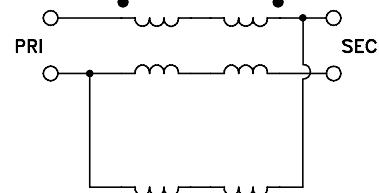

## Outline Drawing

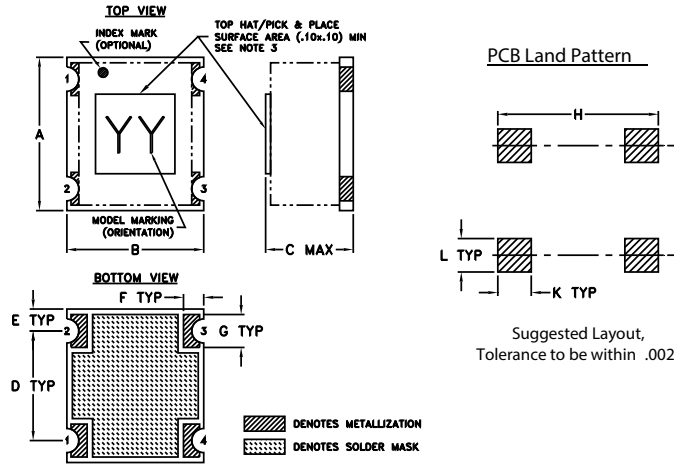

## Outline Dimensions (inch/mm)

A	B	C	D	E	F
.280	.250	.16	.200	.040	.037
7.11	6.35	4.06	5.08	1.02	0.94
G	H	J	K	L	wt.
.060	.293	.200	.061	.061	grams
1.52	7.44	5.08	1.55	1.55	3

## Typical Performance Data

FREQUENCY (MHz)	INSERTION LOSS (dB)	INPUT R. LOSS (dB)	AMPLITUDE UNBALANCE (dB)	PHASE UNBALANCE (Deg.)
10.0	0.35	11.81	0.40	9.31
50.0	0.35	24.24	0.23	1.45
100.0	0.37	24.82	0.21	0.64
500.0	0.44	19.21	0.00	1.73
1000.0	0.60	18.90	0.22	1.84
1200.0	0.63	20.28	0.23	1.96
1300.0	0.64	21.30	0.25	3.00
1400.0	0.66	22.02	0.28	4.17
1600.0	0.73	21.17	0.31	6.80
1800.0	0.89	14.58	0.35	10.12

