

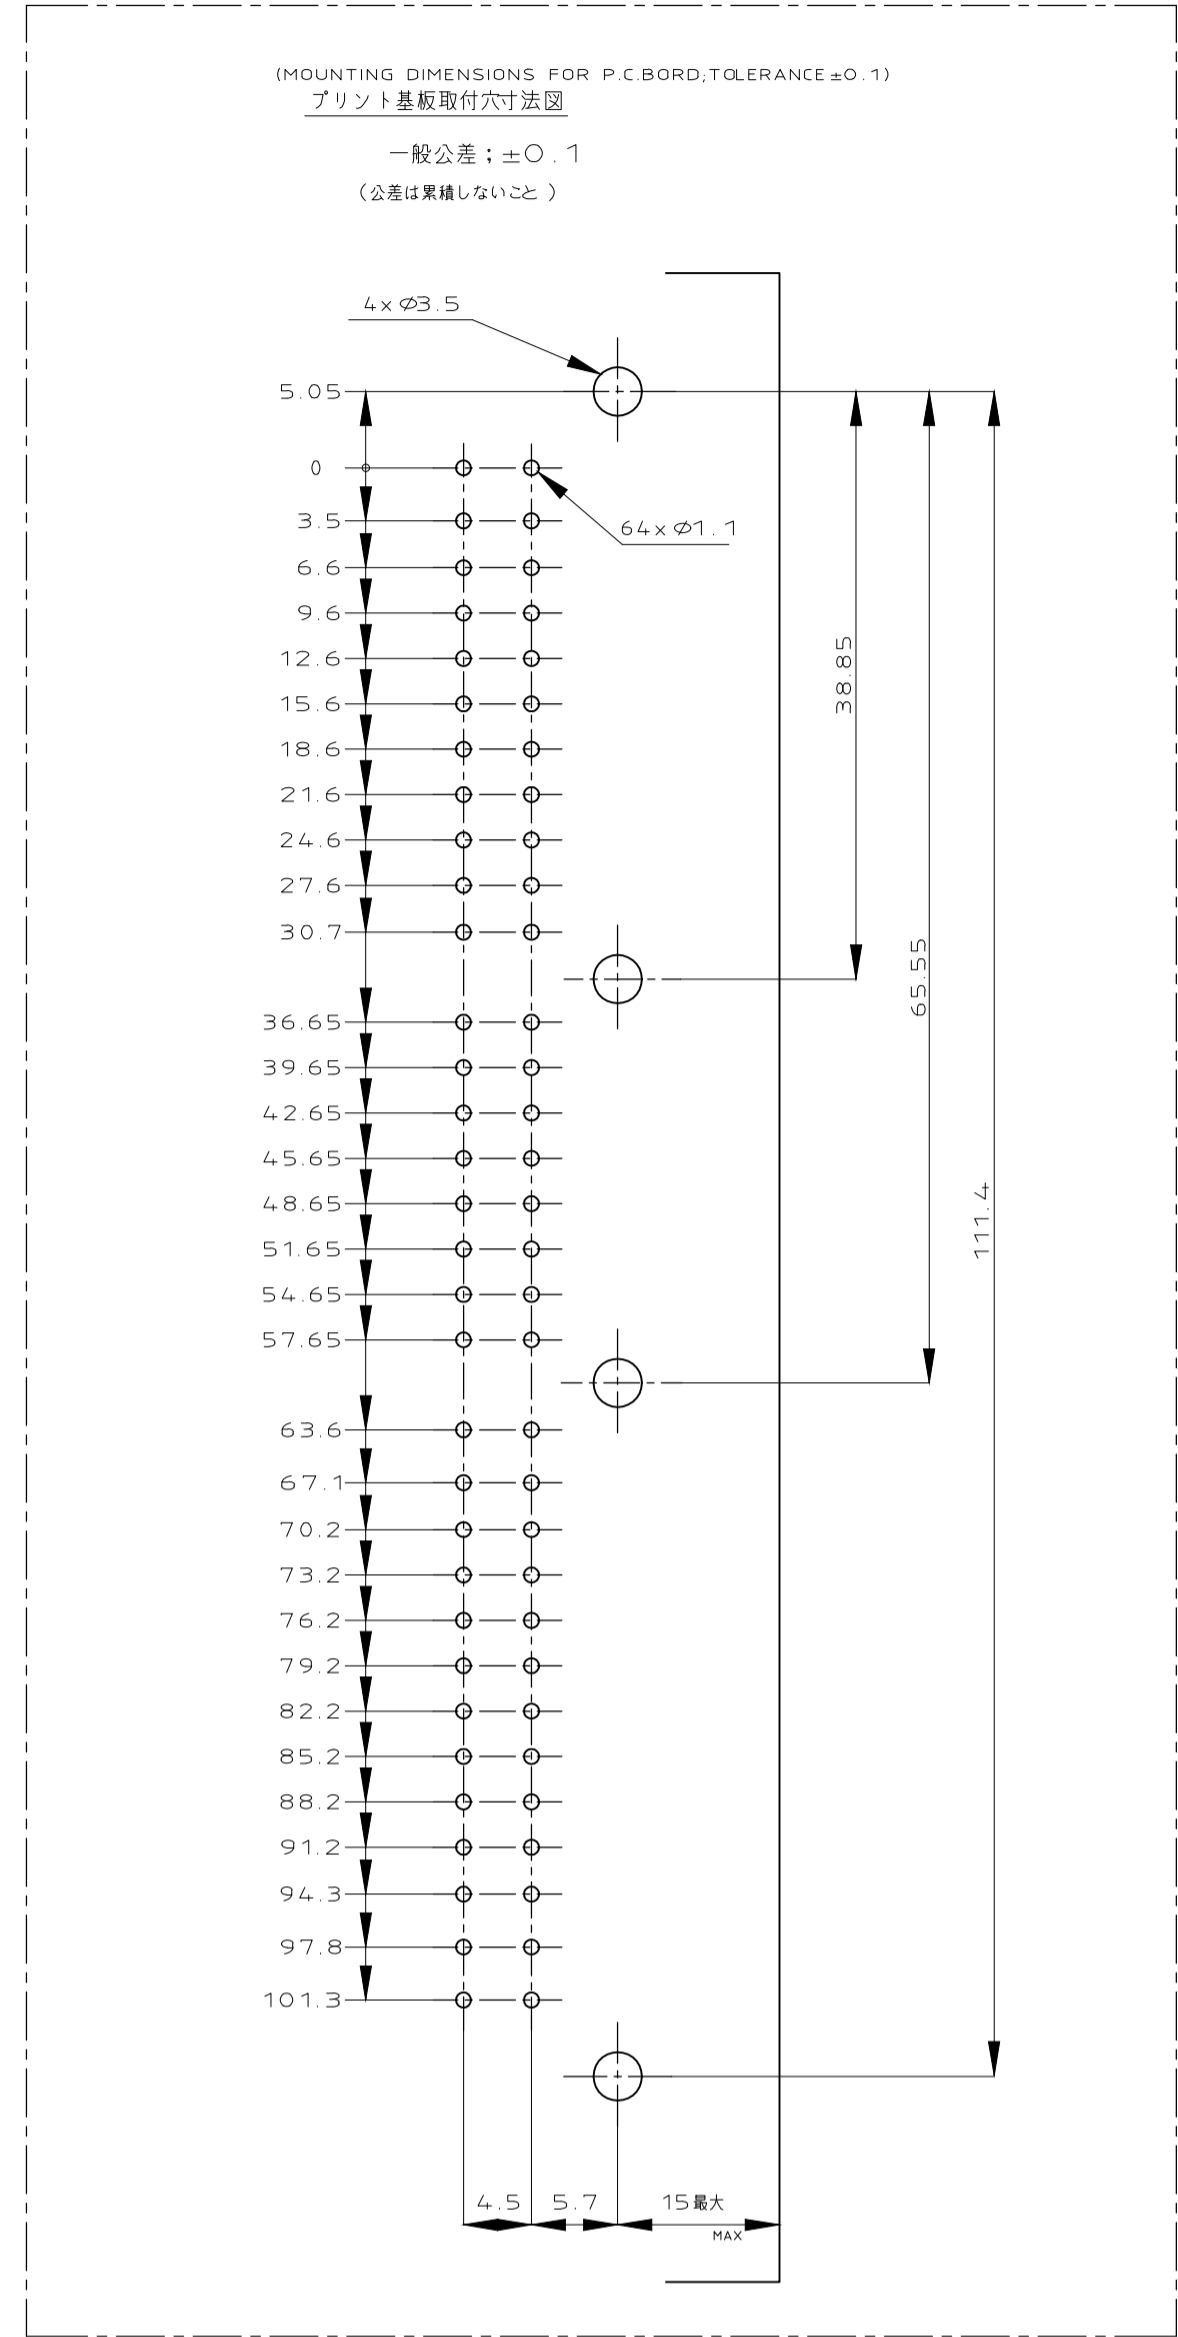
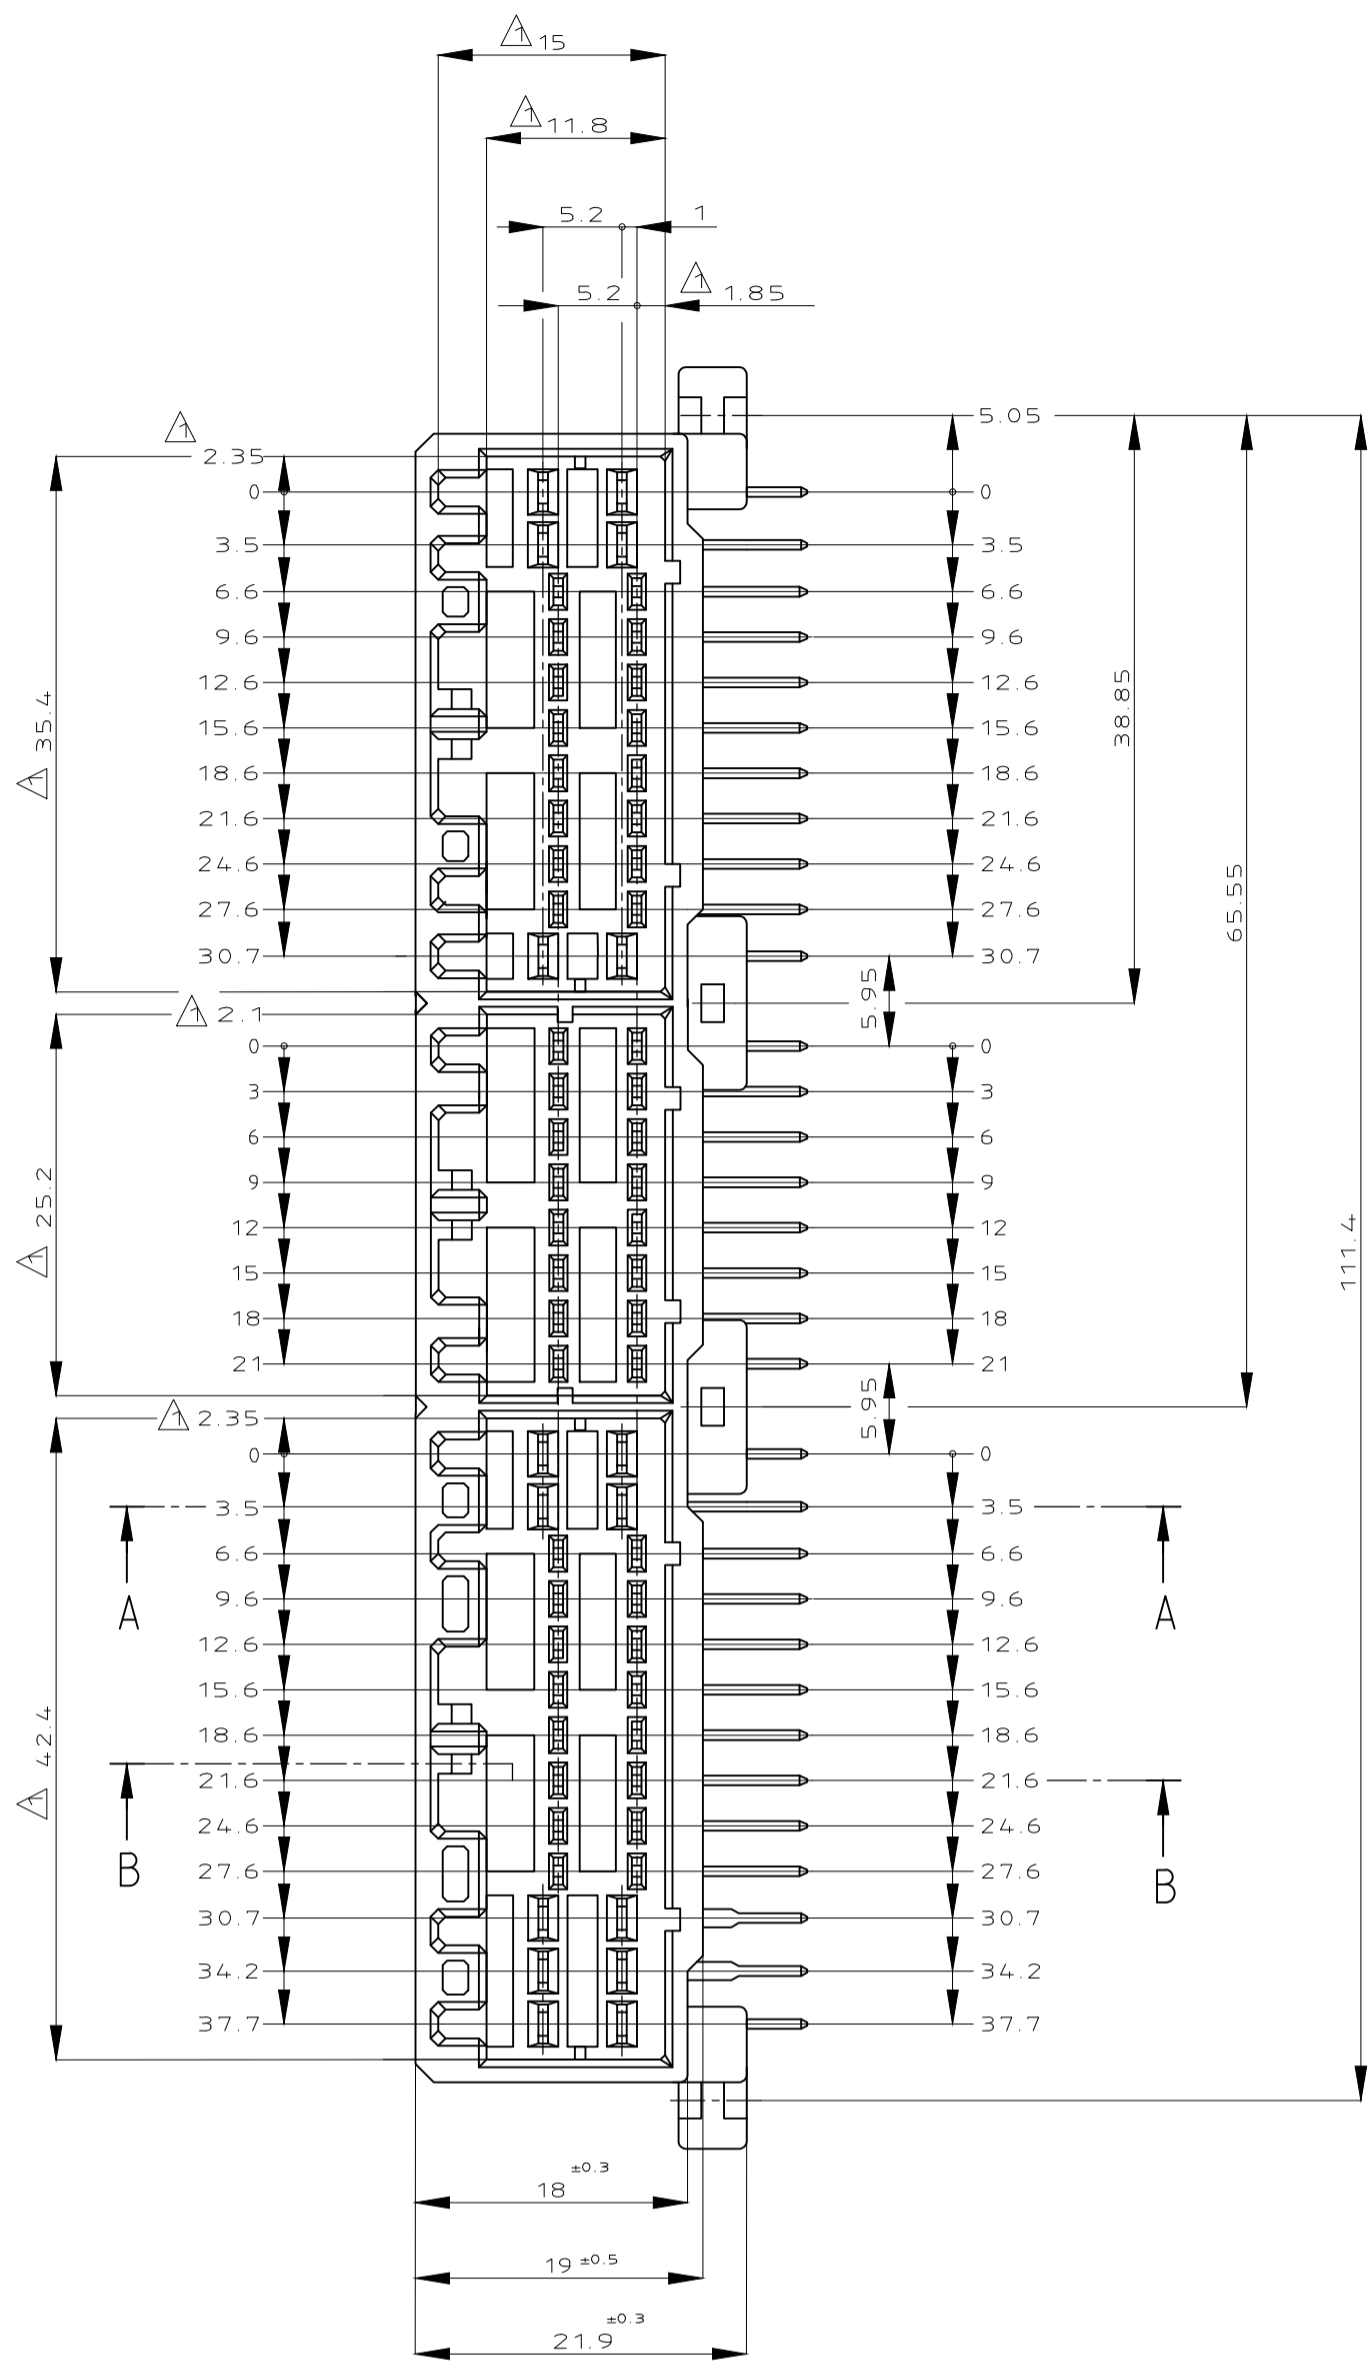
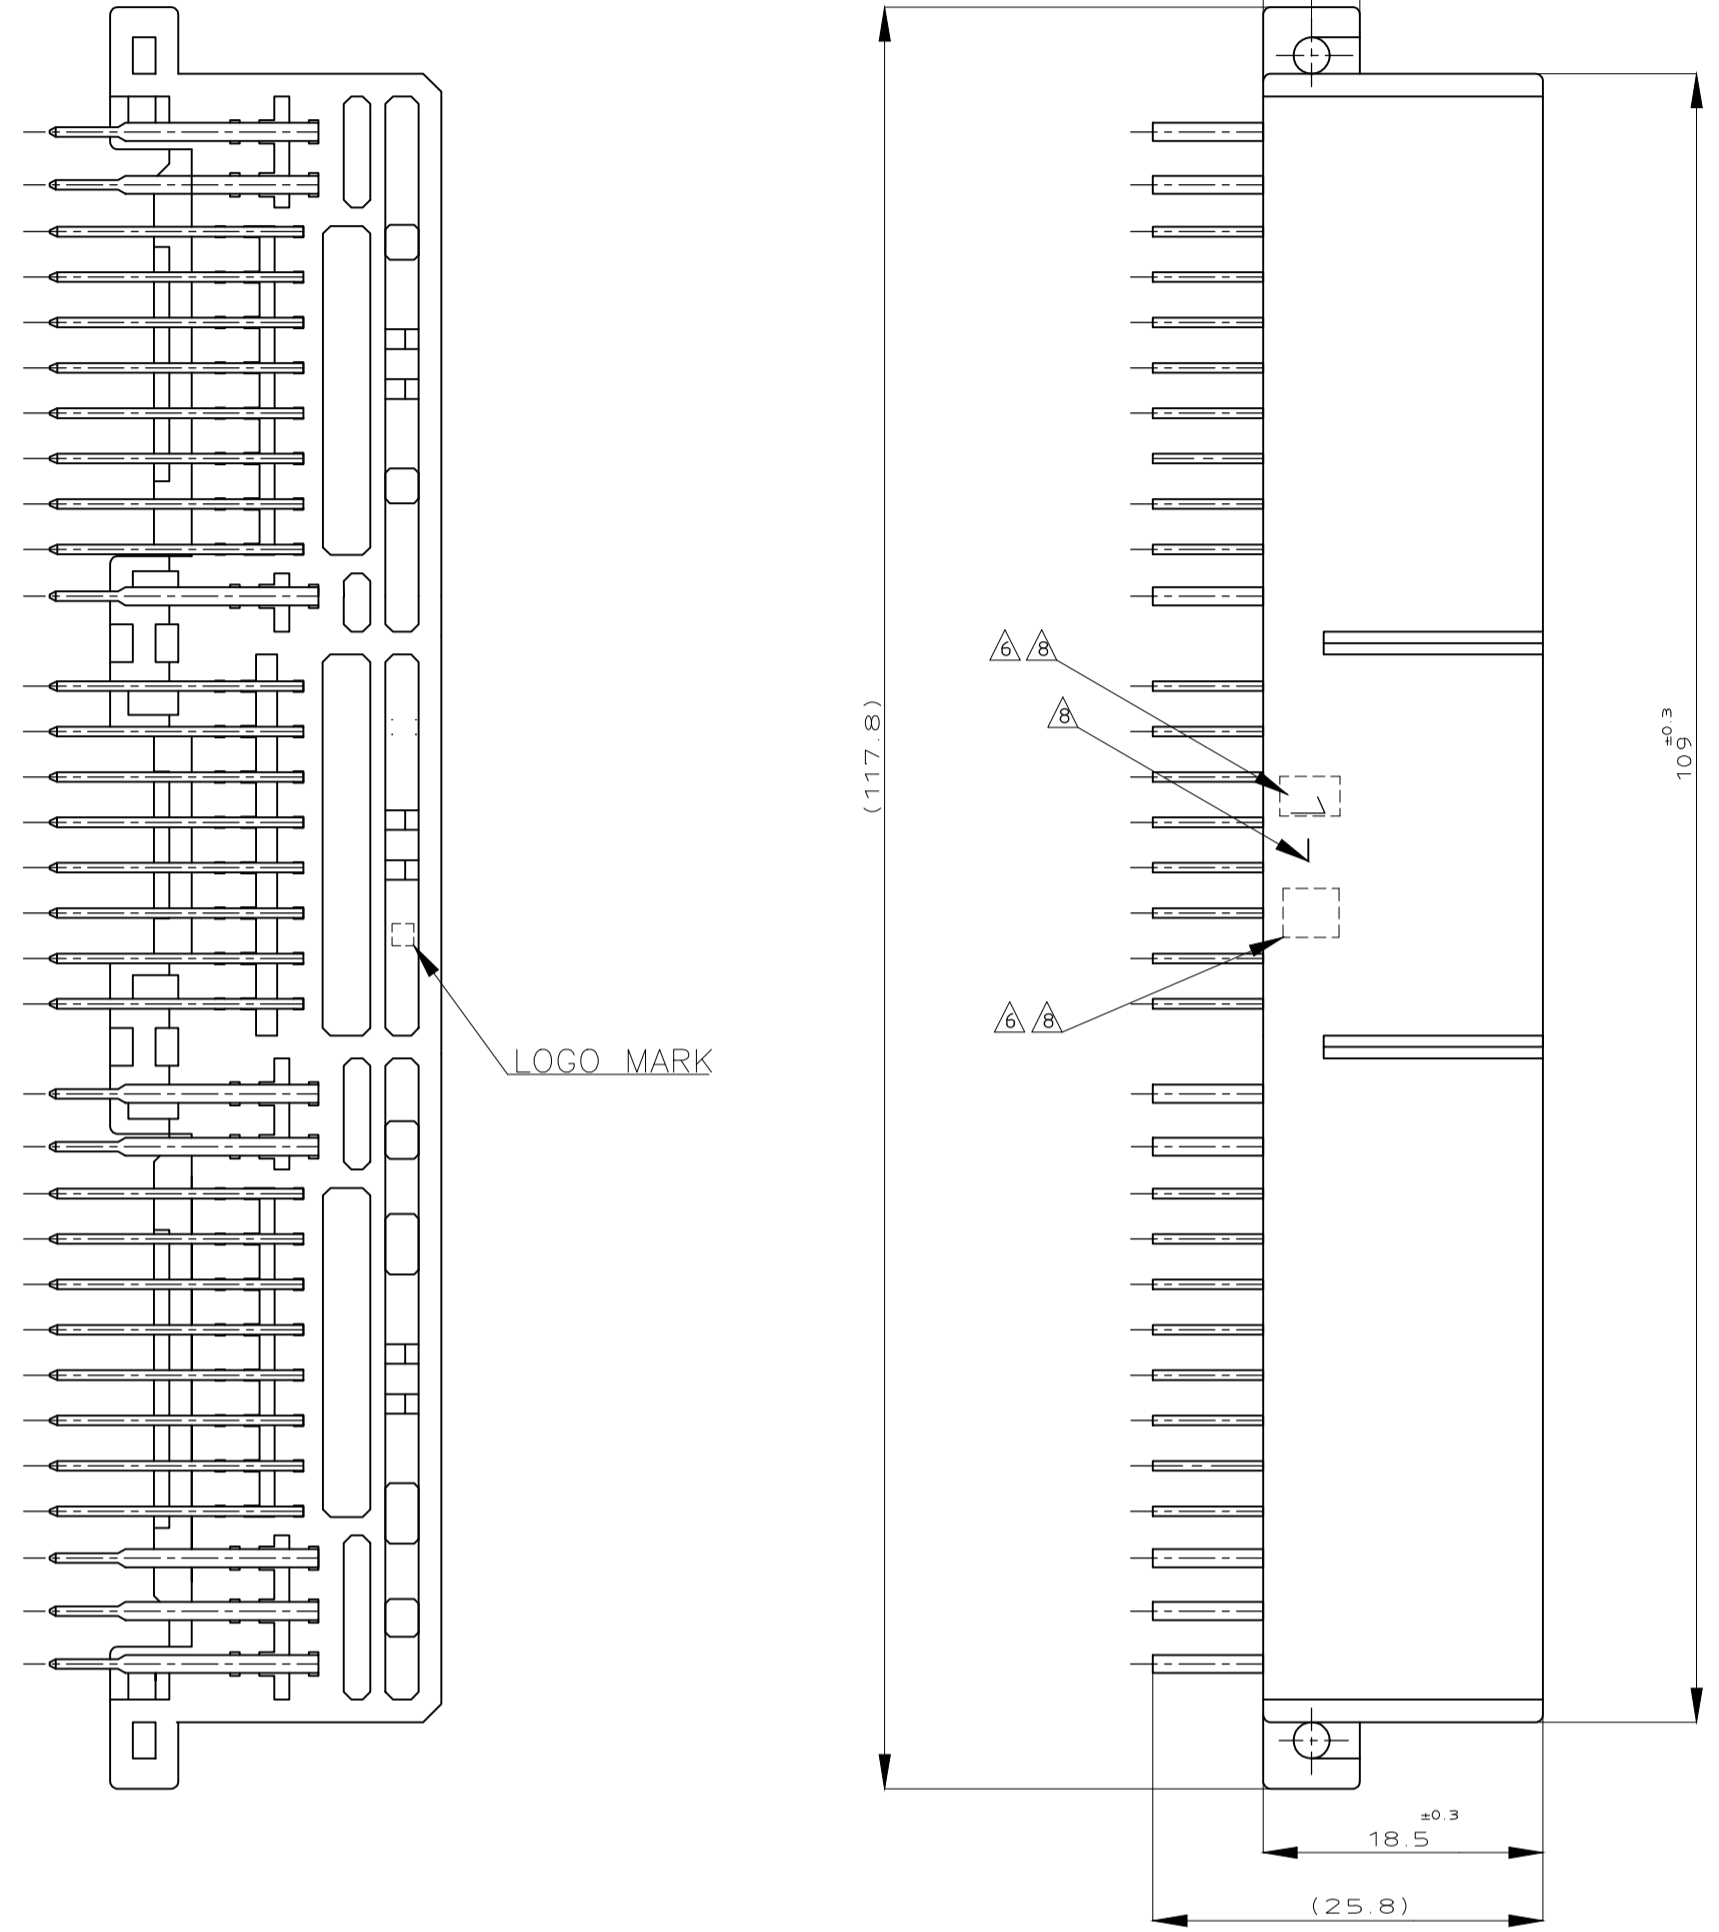
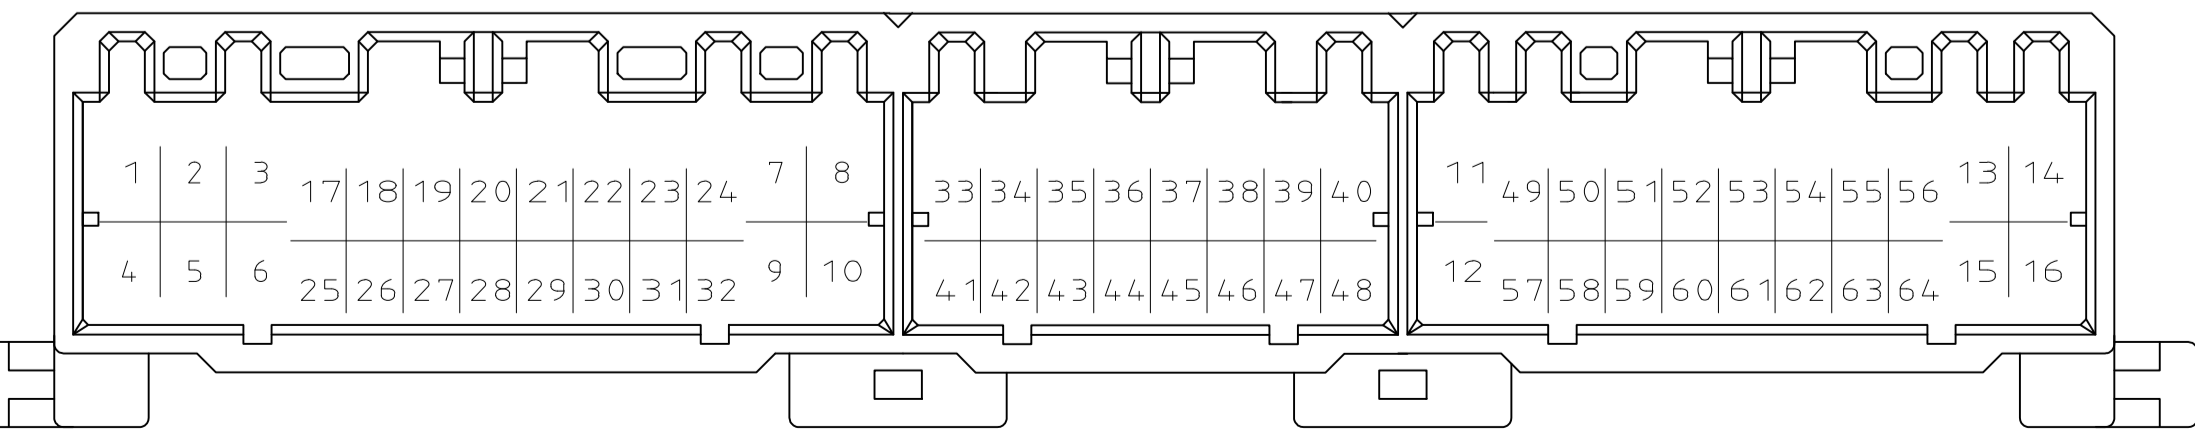


REVISIONS					
REV	DATE	DESCRIPTION	BY	CHK	APPV
H5	REVISED	ECR-20-007333		PSJ	TM

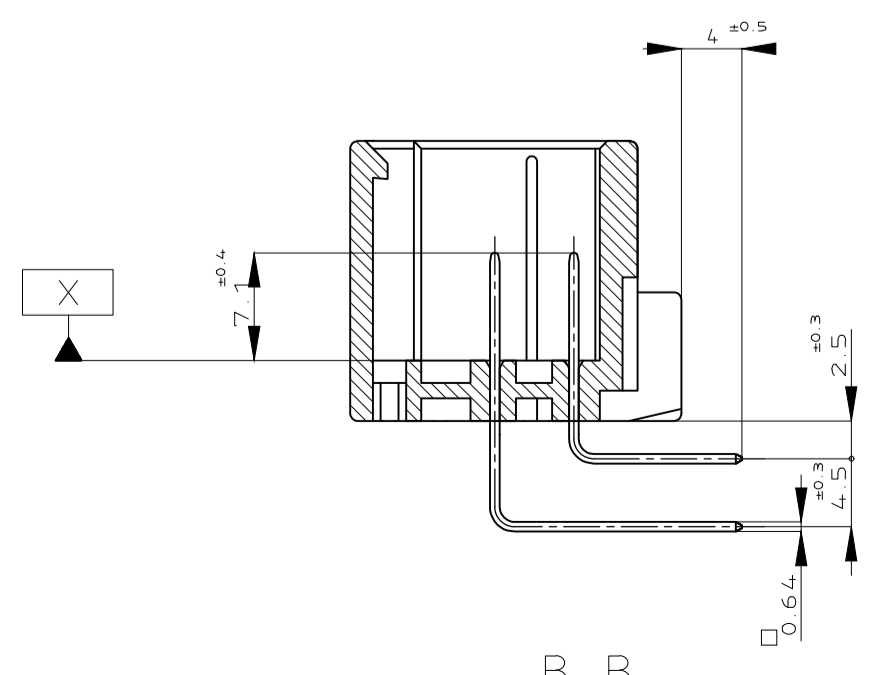

- 1 MUST BE KEPT BETWEEN [X] AND 2
- △ THE MATING PLUG HSG.PART NUMBER : 174516,174515,174514, 917992, 917989, 917981
- 3 RECOMMENDED MOUNTING SCREW,3mmDIA,6mmLENGTH(MAX) PAN HEAD,CLASS 2 TAPPING SCREW SPECIFIED IN JIS B1115,B1122
- 4 APPLICABLE PRODUCT SPEC NO.108-5280, 108-5342
- △ CIRCUIT NUMBER
POWER CIRCUIT NO.①~⑫
SIGNAL CIRCUIT NO.⑬~⑳
- △ INDICATED PREFIX AND ID MARK OF PRODUCT P/N BY COLOR HOT MARK
- △ PCB SIDE OF GOLD PLATING TAB IS TIN PLATE
- △ USING "X"REPLACE "-"(P/N MARK)
- EXAMPLE "1XD"

- △ [X]面から2mmの範囲で測定
- 2 嵌合相手ハウジング型 174516, 174515, 174514, 917992, 917989, 917981
- 3 推奨取付ねじ; JIS B1115,B1122 カホンねじ、なべ2種 呼び径3、長さ6mm以下(締付けトルク:0.4N・m以下)
- 4 適用製品規格番号: 108-5280, 108-5342
- △ 回路番号: 下図参照のこと
パワー回路 ①~⑫
シグナル回路 ⑬~⑳
- △ 適用製品型番のアフィックス及びIDマークを カラーホットマークにて表示
- △ 全メッキタブは、基板側に鉛メッキを行う
- △ P/N 177609-2に限り、ホットマークに“-”(P/N MARK)ではなく“X”を使用する
例 1XD

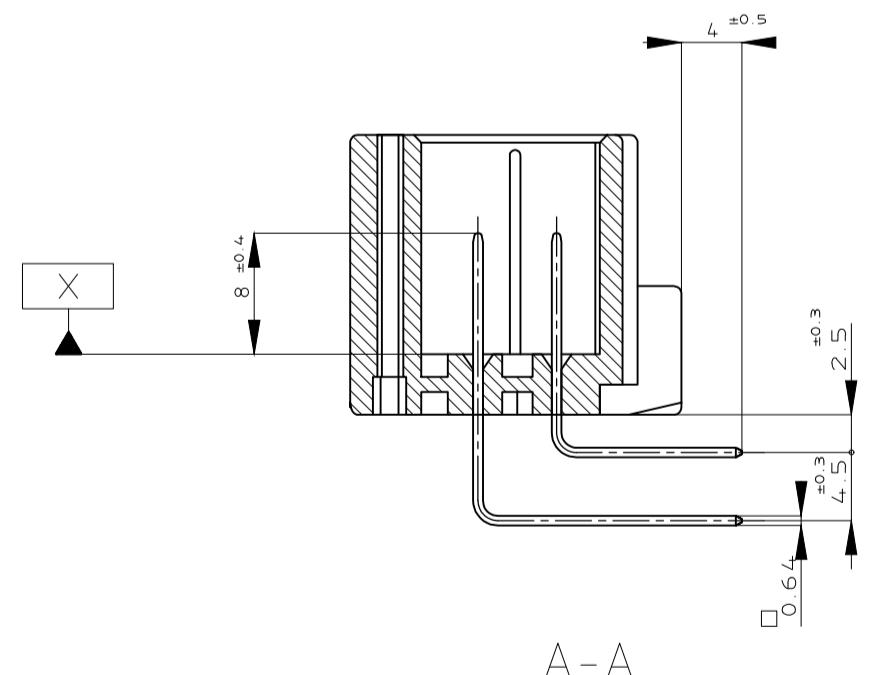

REV	DESCRIPTION	DATE	BY	CHK	APPV
59-	BLACK SELECTIVE-TIN (MATTE) SELECTIVE GOLD x 5				
57-	BLACK SELECTIVE-TIN (MATTE) SELECTIVE GOLD x 8				
54-	WHITE SELECTIVE-TIN (MATTE) SELECTIVE GOLD x 25				
58-	BLACK SELECTIVE-TIN (MATTE) SELECTIVE GOLD x 8				
55-	WHITE SELECTIVE-TIN (MATTE) SELECTIVE GOLD x 11				
54-	WHITE SELECTIVE-TIN (MATTE) SELECTIVE GOLD x 25				
54-	BLACK SELECTIVE-TIN (MATTE) SELECTIVE GOLD x 25				
53-	BLACK SELECTIVE-TIN (MATTE) SELECTIVE GOLD x 10				
52-	WHITE SELECTIVE-TIN (MATTE) SELECTIVE GOLD x 18				
50-	WHITE SELECTIVE-TIN (MATTE) SELECTIVE GOLD x 11				
9-	BLACK TIN-LEAD SELECTIVE GOLD x 5				
8-	BLACK TIN-LEAD SELECTIVE GOLD x 8				
7-	BLACK TIN-LEAD SELECTIVE GOLD x 8				
6-	WHITE TIN-LEAD SELECTIVE GOLD x 9				
5-	WHITE TIN-LEAD SELECTIVE GOLD x 11				
4-	WHITE TIN-LEAD SELECTIVE GOLD x 25				
4-	BLACK TIN-LEAD SELECTIVE GOLD x 25				
3-	BLACK TIN-LEAD SELECTIVE GOLD x 10				
2-	WHITE TIN-LEAD SELECTIVE GOLD x 18				
1X	BLACK TIN-LEAD SELECTIVE GOLD x 11				
0-	WHITE TIN-LEAD SELECTIVE GOLD x 11				

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIN: K.FURUYAMA 30JAN02
CHK: H.YAMAGAMI 31JAN02
APPV: N.SAI 31JAN02

TE Connectivity
TE CONNECTIVITY
TE CONNECTIVITY

0.40/.070 SERIES HYBRID I/O CONN.
64POSITION CAP HOUSING ASSY

SIZE: A1
CAGE CODE: 00779
DRAWING NO: 177609

WEIGHT: 28.4g

MATERIAL: PBT,BRASS
FINISH: 仕上
SEE TABLE

SCALE: FREE
SHEET: 1 of 1
REV: H5