
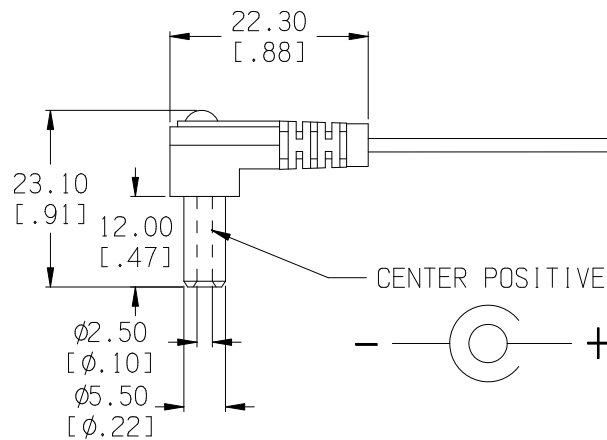



Date	SYM	REVISION RECORD	AUTH	DR.	CK.
02/01/03	A	(1) 23.50 was 31.00. (2) 8.50 was 9.50 (3) added dimple on jack	T.B.	B.S.	
08/06/14	B	UPDATED TO ROHS 2 COMPLIANT	T.B.	B.S.	
02/19/16	C	WIRE GAUGE 22 AWG WAS 24AWG	T.B.	B.S.	
05/03/19	D	ADDED DIMENSIONS	T.B.	B.S.	

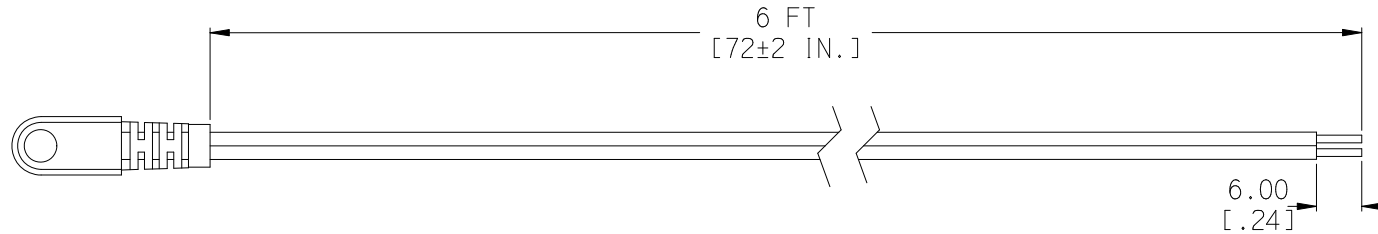

HOUSING: BLACK  
 CORD: UL2468, 300V, 80°C, 22 AWG  
 PASSES UL FLAME TEST VW-1  
 CENTER IS POSITIVE CONTACT  
 DC MOLDED PLUG: 2.5mm X 5.5mm  
 ROHS COMPLIANT

Tolerance (Inches)	 <b>Memory Protection Devices, Inc</b> 200 Broad Hollow Road, Farmingdale, New York 11735		
Decimal		Scale	Drawn By B.S.
±.5 (.020)			Approved By T.B.
Fractional	Title 2.5mm DC MOLDED PLUG WITH 6' WIRE LEADS		
± .8 (.030)			
Angular	Date	Drawing Number	
± 3°	05/03/19	172-4000	