


UNIT OF MEASURE	A	B	C	D	E	G	L	MAX. BUNDLE DIA.	MIN. TENSILE STRENGTH
INCHES	.787	.346	.188	.242	.049	.212	8.48	1.75	50 lbs.
MM	19.99	8.79	4.78	6.15	1.24	5.38	215.	44.45	22.68 kg.

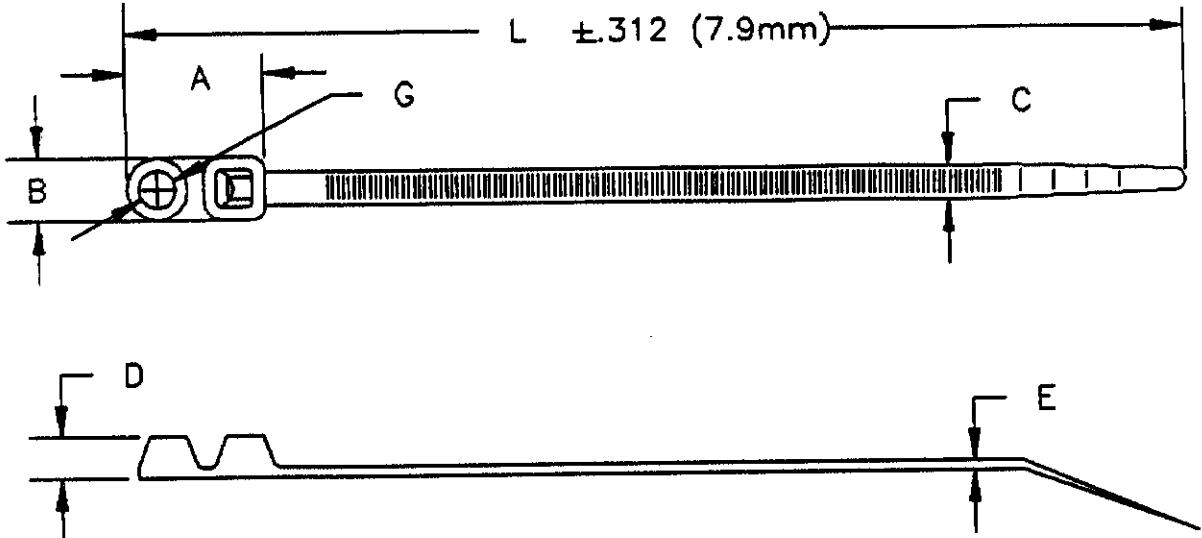

THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN AMP PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM AMP INCORPORATED, HARRISBURG, PA.

NOTES:

1. MOISTURIZED 1 TO 2.5% WATER.
2. PACKAGED IN HEAT SEALED 3 MIL POLYBAG WITH LABEL PER DWG 404707.
3. OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

APC ENGINEERING

JUL 13 1990

ISSUED BY *Clu*

CUSTOMER DRAWING UNPUBLISHED

	2-608694-9	NATURAL-1000 PCS. SMY134M	
	1-608694-9	NATURAL-100 PCS. SMY134C	
3	2-608694-0	BLACK-1000 PCS. SMY134MB	
	1-608694-0	BLACK-100 PCS. SMY134CB	

LOC	DIST	QTY. REQ'D. PER ASSY.	DWG SIZE	PART No.	DESCRIPTION	ITEM NO
D	1					
REVISION OF EACH ASSY NO. (WHEN BLANK, USE DWG REVISION)						
			PARTS LIST			
		MATERIAL NYLON 6/6		HEAT TREAT		FINISH
		DIMENSIONS ARE IN INCHES		DRAWN BY: AD-TEK/VL	DATE: 8/22/90	APPROVED BY:
		TOLERANCES UNLESS OTHERWISE SPECIFIED:		CHECK BY: BJM 6/90		RELEASE: J. Hamed 6/90
		2 PL DEC ±		AMP AMP INCORPORATED Harrisburg, Pa.		
		3 PL DEC ± .030				
		4 PL DEC ±				
		ANGLES ±		NAME: # 10 SCREW MOUNT		
		SURF TEXTURE: J		CABLE TIE 8-1/2 INCH		
	01	REVISD PER ECO-09-026444	AEG	28NOV89	REMOVE BURRS, BREAK SHARP EDGES, .013 R. MAX.	
		ECN 062890	JMB	6/90	SCALE: A	DRAWING No: 608694
P	F	LTR	REVISION RECORD	APP	DATE	SHEET: 1 OF 1
						REV.: 01