

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

	TAB SIZE	WIRE RANGE AWG	COLOR	MAX. INSUL.	DIMENSIONS in.		
PART NUMBER					A±.03	±.02 B	C±.02
DV10-250C	.250 X .032 (6.4 X 0.81)	12-10	YELLOW	.229 (5.82)	1.04	.30 (7.62)	.12

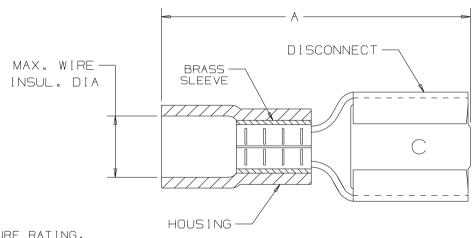



NOTES:

- 1. 600 V MAX VOLTAGE RATING. 194° F (90°C) MAX TEMPERATURE RATING. STRANDED COPPER WIRE ONLY.
- 2. MATERIAL:
 A. STAMPING: CDA-260 BRASS, TIN PLATED
 B. HOUSING: VINYL
- 3. DIMENSIONS IN BRACKETS ARE IN MILLIMETERS.
- 4. WIRE STRIP LENGTH 9/32 +1/32 (7.1 *.8.0)
- 5. PACKAGE QUANTITY: -L = 50 -D = 500
- 6. INSTALLATION TOOLS: CT-100, CT-160, CT-260, CT-460, CT-550, CT-1550, CT-1551

A41730_00

								PANDING CORP. TIMES BARK III IN		
								CORP. TINLEY PARK, ILLIN	1015	
								FEMALE DISCONNECT FOR COMPRESSOR TABS,		
00	12/05	DAW	,	RELEASED	TR00060			VINYL INSULATED, .250 x .032		
REV	DATE	ВҮ	CHK	DESCRIPTION	ECN #	РМ	CUST	T DAW CHK'D SCALE NONE DRAWING NO./GAD FILENAME A 4 1 7 30		