DRAWING MADE IN THIRD ANGLE PROJECTION
THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION ,19 .
© COPYRIGHT 19 BY AMP INCORPORATED. ALL INTERNATIONAL RIGHTS RESERVED.

MOD	LOC	DIST		
1	BD	37	P	F

REVISIONS				
ZONE	LTR	DESCRIPTION	DATE	APPD
	D	REDRAWN WITHOUT CHANGE	09/11/92	–
	E	085 -2 PER EC 0020-200-93	03/10/94	AT

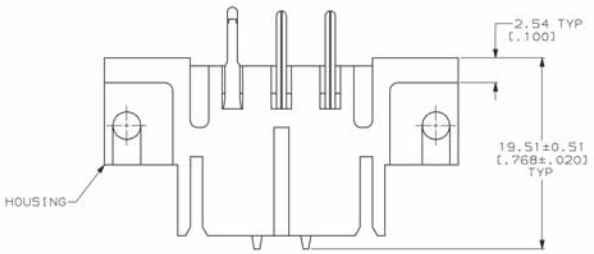

1. HOLES LOCATED IN ROWS W & Y FOR ANY CIRCUIT WITH A COAX CONTACT.
   HOLES LOCATED IN ROW X FOR ANY CIRCUIT WITH A POWER CONTACT.
2. BODY: PHOSPHOR BRONZE PER QQ-B-750.
   HOOD: STAINLESS STEEL PER QQ-S-766.
3. CENTER CONDUCTOR: BRASS PER QQ-B-626.
   SHELL: BRASS PER MIL-C-50.
4. 0.76µm [.000030] MIN GOLD PER MIL-G-45204 FOR A LENGTH OF 5.08 [.200] MIN FROM MATING END, 3.81µm [.000150] MIN TIN-LEAD PER MIL-T-10727 FOR A LENGTH OF 4.99[.196] MIN FROM OPPOSITE END, BOTH OVER 1.27µm [.000050] MIN NICKEL PER QQ-N-290.
5. CENTER CONDUCTOR: 1.27µm [.000050] MIN GOLD PER MIL-G-45204 OVER 0.76µm [.000030] MIN NICKEL.
   SHELL: 0.38µm [.000015] MIN GOLD PER MIL-G-45204 OVER 1.27µm [.000050] MIN NICKEL PER QQ-N-290.

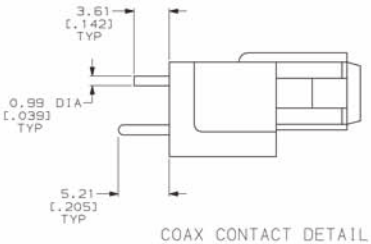

COAX CONTACT DETAIL

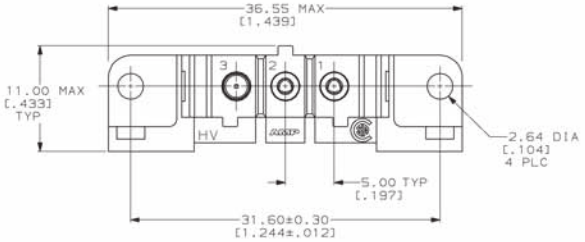



POWER CONTACT DETAIL

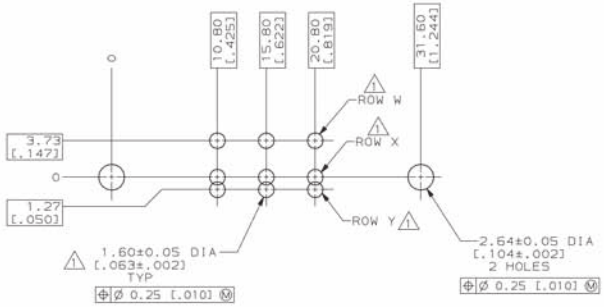

RECOMMENDED PC BOARD LAYOUT

OBSOLETE	COAX	POWER	POWER	208708-2
	COAX	COAX	COAX	208708-1
	CKT #3	CKT #2	CKT #1	PART NO
	TYPE OF CONTACTS LOADED			

DO NOT SCALE PRINT.
UNLESS SPECIFIED
DIMENSIONS IN mm [INCHES]
TOLERANCES ON :
2 PLC DEC ± 0.25 [.010]
3 PLC DEC ± –
ANGLES ± –

MATERIAL
HOUSING: NYLON, RED
POWER CONTACT: 2
COAX CONTACT: 2

FINISH
POWER CONTACT: 4
COAX CONTACT: 5

DR 09/16/92 S.WELDON
CHK 10/14/92 R.STONE
APPD 10/15/92 A.TRAVIS
APPD 10/15/92 C.ROHDE
PRODUCT SPEC –
APPLICATION SPEC –
WEIGHT –

AMP Incorporated
Harrisburg, PA 17105-3608

NAME
SOCKET HEADER ASSEMBLY, 3 POSN, COAX, METRIMATE

SIZE D | CAGE CODE 00779 | DRAWING NO C-208708
SCALE 4:1 | SHEET 1 OF 1

THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.

CUSTOMER DRAWING