

4


3

2

1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	J1	REVISED PER ECO-11-020548	06FEB12	KH	DR
	J2	REVISED PER ECO-17-014338	14MAY2018	RS	DR

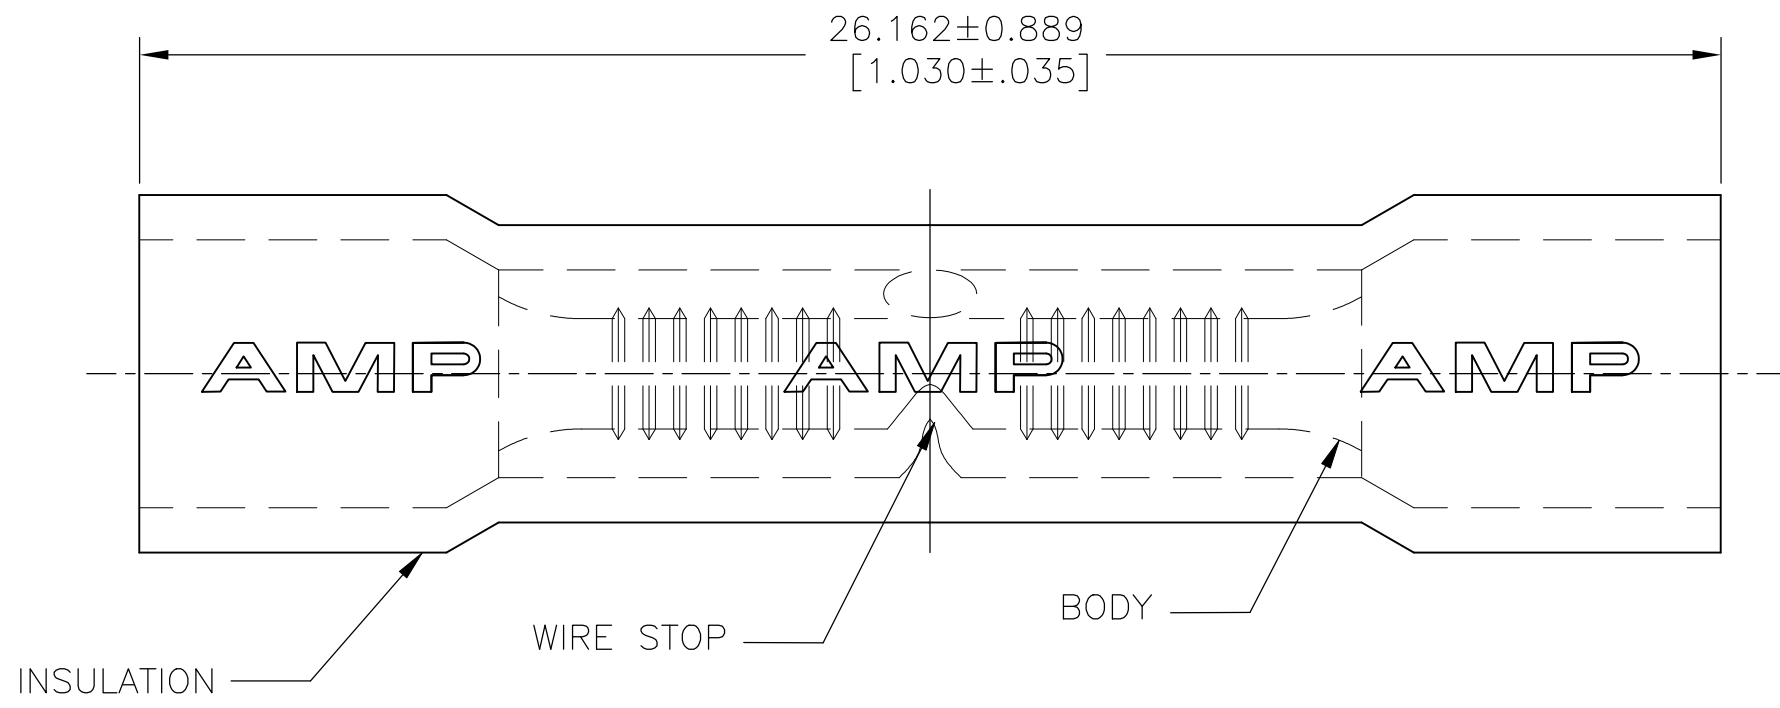

2500	TAPE AND REEL	4.318[.170] MAX	INSULATION: PVC COLOR: RED BODY: COPPER PER ASTM B152, ANNEALED TIN PLATE PER ASTM B545	1-34243-1
1000	LOOSE PIECE	4.318[.170] MAX		34243
QTY	PACKAGE TYPE	INS DIA.	MATERIAL & FINISH	PART NO

AMP INCORPORATED
 CUSTOMER SERVICE SYSTEMS

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN	KIRAN HOLAL	11JAN12
CHK	ROHDE DANIEL	11JAN12
APVD	ROHDE DANIEL	11JAN12
PRODUCT SPEC	UL486A-B	
APPLICATION SPEC	114-2161	
WEIGHT	A3 00779 C-34243	



NAME				RESTRICTED TO	
WIRE SPLICE PLASTI-GRIP-BUTT				-	
WIRE SIZE: 22-16				-	
SIZE	CAGE CODE	DRAWING NO			
A3	00779	C-34243			

FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS	PRODUCT INFORMATION CENTER 1-800-522-6752	MAX RECOMMENDED OPERATING TEMPERATURE: 105°C [221°F] MAX
FOR APPLICATION TOOLING INFORMATION	TOOLING ASSISTANCE CENTER 1-800-722-1111	VOLTAGE RATING: 600V MAX (1000V FIXTURE OR SIGNS)
FOR ORDER ENTRY	1-800-526-5142	CIRCULAR MIL AREA: 0.26-1.65mm²[509-3,260] SOLID OR STRANDED

DIMENSIONS:	TOLERANCES UNLESS OTHERWISE SPECIFIED:
mm [INCHES]	
	0 PLC ± -
	1 PLC ± -
	2 PLC ± -
	3 PLC ± 0.127[.005]
	4 PLC ± -
	ANGLES ± 5°
MATERIAL	FINISH
-	-

CUSTOMER DRAWING SCALE 8:1 SHEET 1 OF 1 REV J2