


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
AD	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		A		ECO-06-004262	25JUL06	BSV	MK

NOTES:

- 1 INSULATOR MATERIAL: THRMOPLASTIC POLYESTER, BLACK UL 94V-0
- 2 STAMPED CONTACT: BECU, PLATED WITH GOLD FLASH OVER 50-100μ THK NICKEL
- 3 SLEEVE: COPPER, PLATED WITH 180-340μ THK TIN (LEAD FREE) OVER 75-125μ THK NICKEL
- 4. PARTS ARE END-TO-END STACKABLE AND BREAKABLE TO CREATE VARIOUS POSITION SIZES

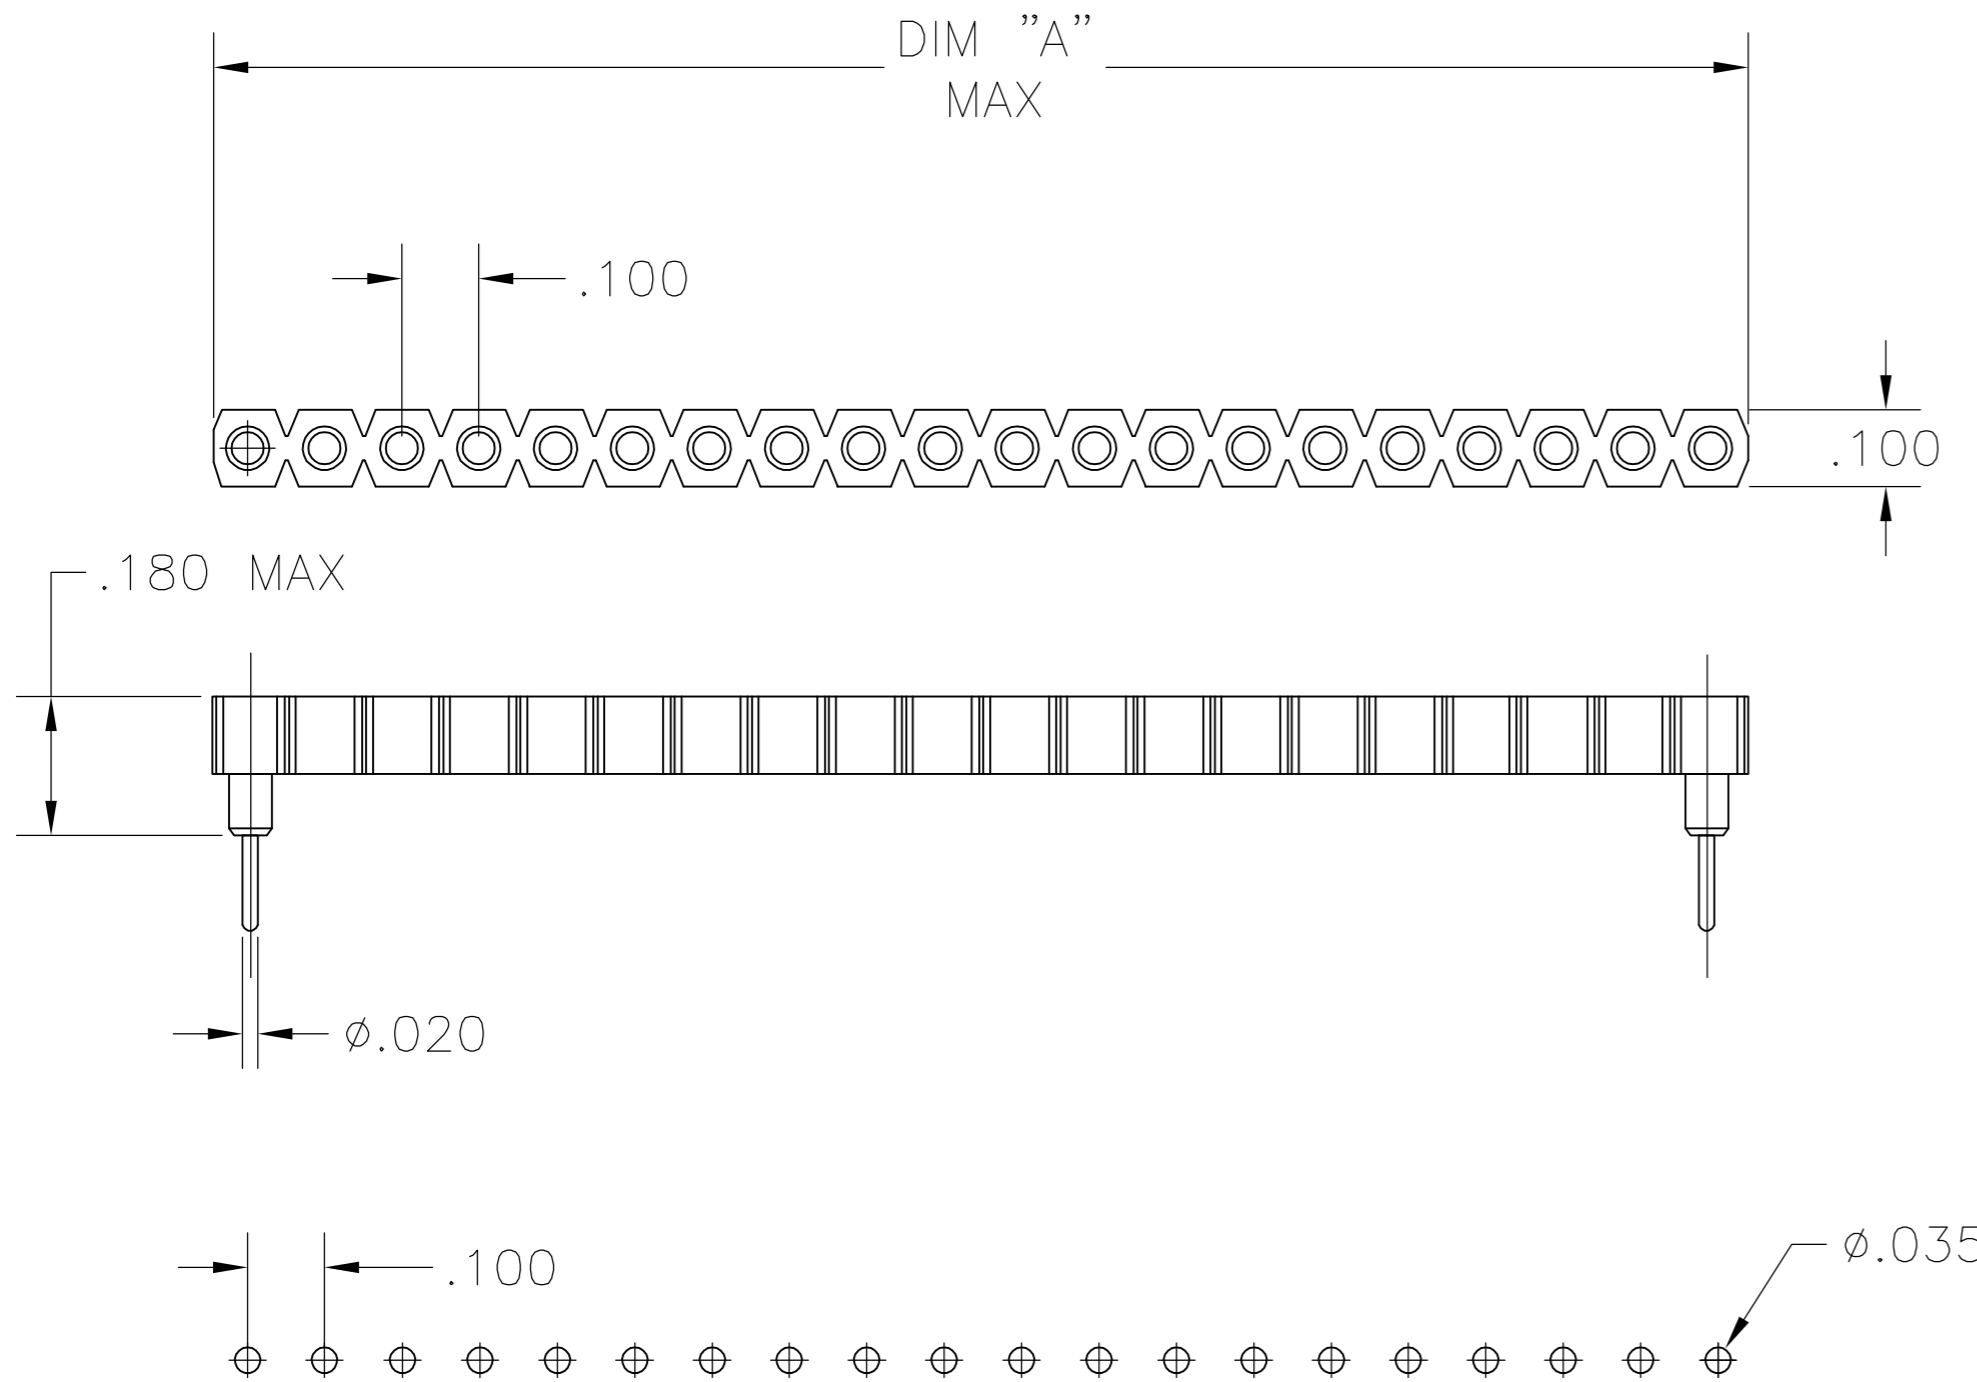

RECOMMENDED HOLE LAYOUT
 TOLERANCE $\pm.002$ UNLESS
 OTHERWISE NOTED

1.000	10	1825532-4
0.800	8	1825532-3
0.700	7	1825532-2
1.600	16	1825532-1
DIM "A"	POSITION	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN B.S VISWESWARA	25JUL06	tyco Electronics		Tyco Electronics Corporation Harrisburg, Pa 17105-3608	
DIMENSIONS: INCHES		CHK -	APVD MILLER KENNETH	NAME ASSEMBLY SOCKET (.510 SERIES S.I.P)			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		PRODUCT SPEC -		APPLICATION SPEC -		SIZE A2	CAGE CODE 00779
0 PLC \pm -		APPLIC. SPEC		DRAWING NO C=1825532		RESTRICTED TO -	
1 PLC \pm -		WEIGHT -		SCALE 4:1		SHEET 1 OF 1	
2 PLC \pm -		CUSTOMER DRAWING		REV A			
3 PLC \pm -							
4 PLC \pm -							
ANGLES \pm -							
FINISH							

1825532