




.100" [2.54 mm] Contact Centers, IDC Dip Plug Straight - SIP110 Series

SPECIFICATIONS

- Operating Temperature: -40°C to +105°C
- Current Rating: 1 Amp
- Dielectric Withstanding: 1,000 VAC
- Insulation Resistance: 5,000 Megohms
- For .050" [1.27 mm] Pitch AWG 26-28 Flat Ribbon Cable
- UL Flammability Rating: 94V-0

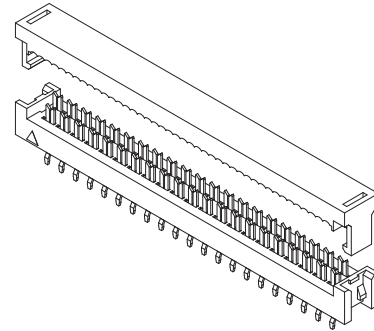


PART NUMBER OPTIONS

SIP110 - P P P C - D 10 - ST - BK


SERIES	_____	COLOR	_____
SIP110 = IDC Dip Plug		BK = Black	
INSULATOR MATERIAL	_____	TERMINATION TYPE	_____
P = PBT		ST = Straight	
CONTACT MATERIAL	_____	SK = Straight with Kink	
P = Phosphor Bronze		NUMBER OF CONTACT POSITIONS	_____
CONTACT FINISH - RoHS Compliant	_____	03 thru 10, 12, 13, 14, 15, 17, 20, 25, 30, 32	
P = Gold Flash Overall		NUMBER OF ROWS	_____
E = .000100" Pure Tin, Matte, Overall		D = Dual Row	
V = Gold Flash on Contact Surface, Nickel on Termination		CONTACT CENTERS	_____
J = .000015" Gold on Contact Surface, Gold Flash on Termination		C = .100" [2.54 mm]	
K = .000015" Gold on Contact Surface, Nickel on Termination			

DIMENSIONS For complete drawings, go to www.sullincorp.com or e-mail techsupport@sullincorp.com


Dimensions in [] are in millimeters, all others are in inches.

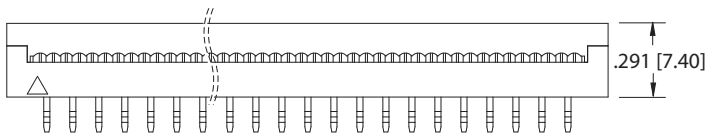




ASSEMBLED FRONT VIEW



STRAIGHT (ST)





WITH KINK (SK)



STRAIGHT (ST)

Example P/N: SIP110-PP_C-D10-ST-BK

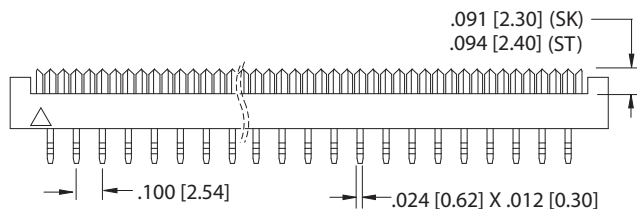

WITH KINK (SK)

Example P/N: SIP110-PP_C-D15-SK-BK