


COIL: @ +25 °C
 RESISTANCE 700 OHMS ± 10%
 NOMINAL VOLTAGE 26.5 VDC
 MUST OPERATE 13.5 VDC
 MUST RELEASE 1.5 VDC

ENVIRONMENT:
 VIBRATION 10 CPS TO 2000 CPS @ 20 g's
 SHOCK 100 g's 6 MS. DURATION
 TEMPERATURE -65 °C TO +125 °C

NOTES: _____

CUSTOMER DATA SHEET

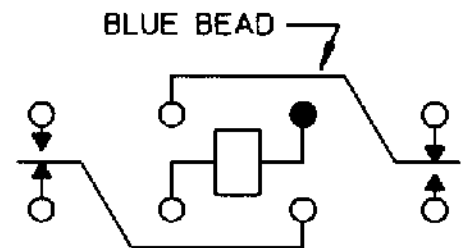

CONTACT RATING: LOW LEVEL TO
5 AMPS 28 VDC RESISTIVE
100,000 OPERATIONS MIN.

DR. R.B. 5/19/93 CK. 5/19/93 JMB



CUST. C. I. I. STD.
 CUST. NO. _____

TYPE **HFWSA RELAY**

HFWSA1130K00