

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS [INCHES]. TOLERANCES ARE: ANGLES

DECIMALS X.X: ±0.3 [.01] X.XX: ±0.13 [.005] X.XXX: ±0.051 [.0020]

PROPRIETARY NOTE THIS DOCUMENT CONTAINS INFORMATION CONFIDENTIAL AND PROPRIETARY TO SAMTEC, INC. AND SHALL NOT BE REPRODUCED

(4 PLCS)

OR TRANSFERRED TO OTHER DOCUMENTS OR DISCLOSED TO OTHERS OR USED FOR ANY PURPOSE OTHER THAN THAT WHICH IT WAS OBTAINED WITHOUT THE EXPRESSED WRITTEN

SHEET SCALE: 8:1

MATERIAL: DO NOT SCALE DRAWING

SHELL: BeCu PIN: BRASS INSULATOR: PTFE



3.00[.118] (TYP)

(TYP)

520 PARK EAST BLVD, NEW ALBANY, IN 47150 PHONE: 812-944-6733 FAX: 812-948-5047 e-Mail info@SAMTEC.com

MMCX STRAIGHT THROUGH HOLE, PLUG - 75 OHM


MMCX7-P-P-XX-ST-TH1

SHEET 1 OF 2 10/08/2011 BY: ALVINW

## NOTES:

- 1. © REPRESENTS A CRITICAL DIMENSION.
- 2. MINIMUM PUSHOUT FORCE FOR INSULATOR: 22.24N [5.0 LBS].
  3. MINIMUM PUSHOUT FORCE FOR CENTER CONTACT: 11.12N [2.5 LBS].
- 4. PRODUCT TO BE PACKAGED PER PACKING STANDARD CO-HD-WI-3040-M. TRAY: TY-SMA001-1
- COVER: TY-SMA001-2
- 200 PARTS PER TRAY (2 PARTS PER POCKET)

C:\EnterpriseVault\DWG\MISC\MKTG\MMCX7-P-P-XX-ST-TH1-MKT.SLDDRW

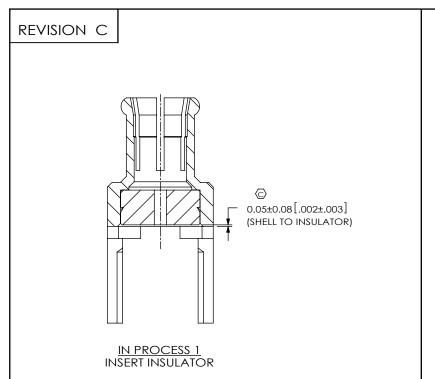

## PROPRIETARY NOTE

THIS DOCUMENT CONTAINS INFORMATION CONFIDENTIAL AND PROPRIETARY TO SANTEC, INC., AND SHALL NOT BE REPRODUCED OR TRANSFERRED TO OTHER DOCUMENTS OR DISCLOSED TO OTHERS OR USED FOR ANY PURPOSE OTHER THAN THAT WHICH IT WAS OBTAINED WITHOUT THE EXPRESSED WRITTEN CONSENT OF SAMTEC, INC.

DO NOT SCALE DRAWING

SHEET SCALE: 8:1



520 PARK EAST BLVD, NEW ALBANY, IN 47150 PHONE: 812-944-6733 FAX: 812-948-5047 e-Mail info@SAMTEC.com code 55322

DESCRIPTION:

MMCX STRAIGHT THROUGH HOLE, PLUG - 75 OHM DWG. NO.

MMCX7-P-P-XX-ST-TH1

BY: ALVINW 10/08/2011 SHEET 2 OF 2