

Ratings

Voltage: 300 V
Temperature: -80~200 °C
Flammability: VW-1
Oil resistance: 60 °C
≥50% elongation and tensile strength after aging

Conductor

Conductor count: 1
Gauge: 16 AWG 1.34 mm²
Material: tinned copper strands
Strand size: Ø0.3 mm x 19
Resistance at 20 °C: 14.6 Ω /km max


Insulator

Material: Fluorinated ethylene propylene (FEP)
Color: green
Diameter: Ø2.16 ±0.10 mm
Nominal thickness: 0.33 mm
Resistance at 20 °C: 2.5 MΩ /kft min

Wire marking: E339579 UL AWM STYLE 1332 16AWG 200°C 300V
VW-1 --- cUL AWM I A/B 200°C 300V FT1 TENSILITY

Mechanical Tests

After aging at 232±1°C for 7 days
Minimum tensile strength 1.76 kgf/mm²
Minimum elongation 200% original

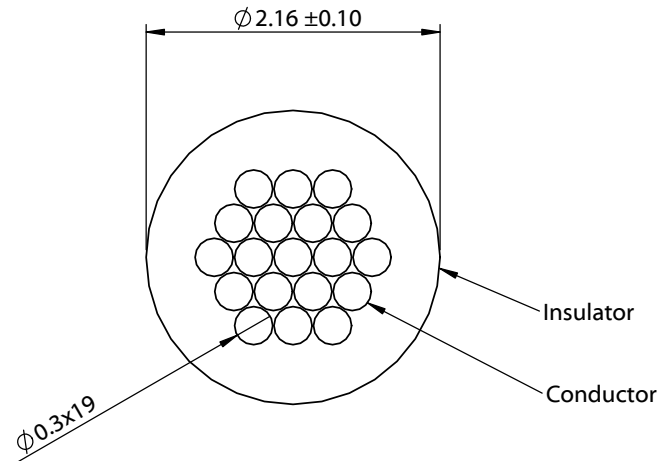

Revision:	Date:	Description:
A	5/23/2022	Initial release

Prepared: **MP**
Digitally signed by MP
Date: 2022.05.24
15:51:00 -07'00'

Verified: **PB**
Digitally signed by PB
Date: 2022.05.27
14:03:24 -07'00'

Dimensions are in millimeters.
Tolerances:
X: ± 0.5 mm
X.X: ± 0.3 mm
X.XX: ± 0.05 mm

Notes:
RoHS compliant


Function test: no open, no short circuit, no Intermittent

Description:
Wire, hook-up, TS, 16 AWG, UL 1332, 300V, 200C, 2.16 mm, FEP, green

TENSILITY

tel 1.541.323.3228 800 877.670.7118
fax 1.541.323.4202 web tensility.com

Size: A Part number: 30-02536

Scale: 18:1  Sheet 1 of 1