

SPECIFICATION SHEET

55A1133

CABLE, ELECTRIC, RADIATION-CROSSLINKED, EXTRUDED, MODIFIED, FLUOROPOLYMER-INSULATED, THREE CONDUCTOR, SHIELDED, JACKETED, LIGHTWEIGHT

28 June 1985

Revision C


200°C

The complete requirements for procuring the cable described herein shall consist of this document and the issue in effect of Raychem Specification 55A.

COMPONENT WIRES - 55A0113

SHIELD - NICKEL-COATED COPPER

JACKET - RADIATION-CROSSLINKED, MODIFIED ETFE

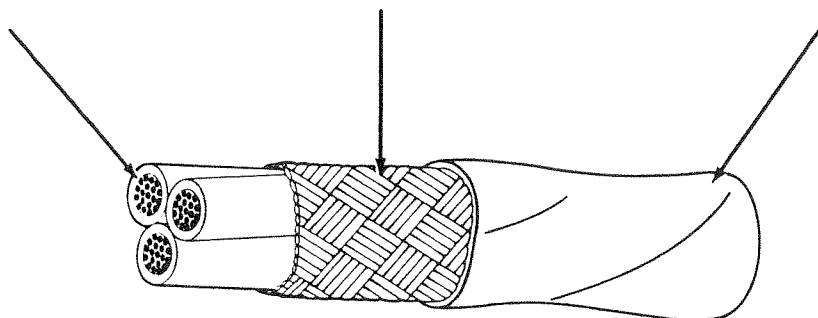

CABLE CONSTRUCTION DETAILS

PART NUMBER	CONDUCTOR SIZE (AWG)	SHIELD SIZE (AWG)	JACKET THICKNESS (in.)		OUTSIDE DIAMETER (in.)		MAXIMUM WEIGHT (lbs/1000 ft.)
			MINIMUM	NOMINAL 1/	NOMINAL 1/	MAXIMUM	
55A1133-30-*	30	38	.006	.008	.085	.090	6.6
55A1133-28-*	28	38	.006	.008	.091	.096	7.8
55A1133-26-*	26	38	.006	.008	.102	.108	9.7
55A1133-24-*	24	38	.006	.008	.113	.119	12.6
55A1133-22-*	22	38	.006	.008	.126	.132	16.5
55A1133-20-*	20	38	.006	.008	.143	.149	22.6
55A1133-18-*	18	38	.006	.008	.165	.172	31.9
55A1133-16-*	16	38	.006	.008	.182	.189	39.2
55A1133-14-*	14	38	.007	.009	.221	.229	56.7
55A1133-12-*	12	38	.007	.009	.260	.270	81.1

1/ Nominal values are for information only. Nominal values are not requirements.

CABLE RATINGS AND ADDITIONAL REQUIREMENTS

TEMPERATURE RATING: 200°C

Maximum continuous conductor temperature

VOLTAGE RATING: 600 volts (rms)

ACCELERATED AGING: 300 ± 3°C for 7 hours

BLOCKING: 200 ± 3°C for 6 hours

DIELECTRIC WITHSTAND: 1500 volts, 60 Hz

FLAMMABILITY:

Procedure 1, 3 seconds (maximum); 3 in. (maximum); no flaming of facial tissue

JACKET COLOR: white preferred

JACKET ELONGATION AND TENSILE STRENGTH:

Elongation, 50% (minimum)

Tensile Strength, 5000 psi (minimum)

JACKET FLAWS:

Spark Test, 1000 volts, 60 Hz (rms), 100% test

Impulse Dielectric Test, 6.0 kV (peak), 100% test

LIFE CYCLE: 230 ± 3°C for 500 hours

LOW TEMPERATURE-COLD BEND: -65 ± 2°C for 4 hours

SHIELD COVERAGE: 85% (minimum)

THERMAL SHOCK: 300 ± 3°C for 6 hours

VOLTAGE WITHSTAND TEST: (After Accelerated Aging, Immersion, Life Cycle, Low Temperature-Cold Bend, and Thermal Shock)

1000 volts, 60 Hz, 1 minute

PART NUMBER:

The "\*" in the part numbers above shall be replaced by color code designators in accordance with MIL-STD-681 with a slash separating component wire colors and a dash separating the component wire colors from the jacket color.

Example: AWG 20, white, black and red component wires; white jacket: 55A1133-20-9/0/2-9

THIS SPECIFICATION SHEET TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BID.

**Raychem**

Raychem Corporation  
300 Constitution Drive, Menlo Park, California 94025  
415) 361 3333 TWX 910 373 1205