

## CB-DT 140/3.5 BL

**Weidmüller Interfaces GmbH & Co. KG**

Postfach 3030


32760 Detmold

Tel. +49 5231 14-0

Fax. +49 5231 14-2083

info@weidmueller.com

www.weidmueller.com

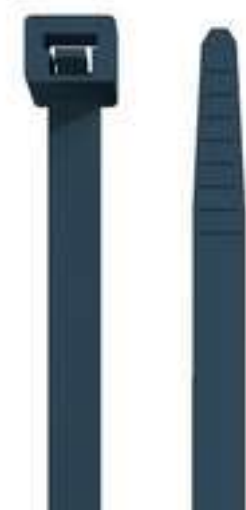

With our detectable marking solutions, we support our food and beverage industry customers in ensuring the high standards required within the HACCP concept. Due to a metallic filler, our detectable Cable Ties are identified reliably by metal and X-ray detectors. Identification minimises the risk of contamination during the food production process. MultiCards provide maximal safety because of properties like corrosion resistance. We regularly check and confirm the safety properties in our accredited laboratory. Actual colour may vary, the tone does not affect the product characteristics. Not suitable for direct contact with food.

- Detectable by metal and X-ray detectors
- Visually recognisable by blue colour
- Corrosion resistant metallic filler

### General ordering data

Version	Cable ties, 3.5 x 140 mm, Polyamide 66, 180 N
Order No.	<a href="#">2602760000</a>
Type	CB-DT 140/3.5 BL
GTIN (EAN)	4050118650174
Qty.	100 pc(s).

**CB-DT 140/3.5 BL**

Weidmüller Interfaces GmbH &amp; Co. KG

Postfach 3030

32760 Detmold

Tel. +49 5231 14-0

Fax. +49 5231 14-2083

[info@weidmueller.com](mailto:info@weidmueller.com)[www.weidmueller.com](http://www.weidmueller.com)**Technical data****Dimensions and weights**

Height	140 mm	Height (inches)	5.512 inch
Width	3.5 mm	Width (inches)	0.138 inch
Net weight	0.65 g		

**Temperatures**

Operating temperature range	-25...85 °C
-----------------------------	-------------

**Installation materials**

Cable diameter, max.	36 mm	Detectible in accordance with Rondotest	0.3 mm Fe
For re-opening	No	Halogen	No
Material	Polyamide 66	Operating temperature range, max.	85 °C
Operating temperature range, min.	-25 °C	Recommended industries	Food processing industry
Tensile strength	180 N	Tensile strength (Pound-force)	40 lbf
UL 94 flammability rating	HB	UV-resistant	No
Version	Cable ties		

**Classifications**

ETIM 6.0	EC000046	ETIM 7.0	EC000046
ETIM 8.0	EC000046	ECLASS 9.0	27-14-07-02
ECLASS 9.1	27-14-07-02	ECLASS 10.0	27-14-07-02
ECLASS 11.0	27-14-07-02	ECLASS 12.0	27-14-07-02

**Approvals**

Approvals



ROHS

Conform

**Downloads**

Catalogues

[Catalogues in PDF-format](#)

**CB-DT 140/3.5 BL**

**Weidmüller Interfaces GmbH & Co. KG**

Postfach 3030

32760 Detmold

Tel. +49 5231 14-0

Fax. +49 5231 14-2083

[info@weidmueller.com](mailto:info@weidmueller.com)

[www.weidmueller.com](http://www.weidmueller.com)

**Drawings**

