


product type designation

product description

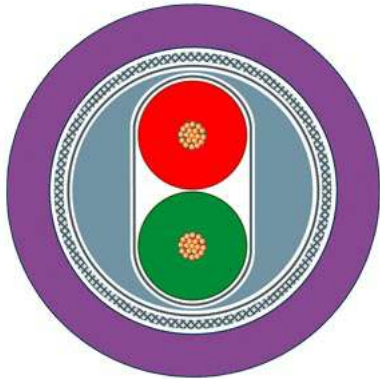

PROFIBUS FC Flexible Cable

Flexible bus cable (2-core), sold by the meter, unassembled

PROFIBUS FC flexible Cable GP, 2-wire, shielded, special configuration for quick assembly delivery unit max. 1000 m minimum order quantity 20 m sold by the meter.

suitability for use

For occasionally moved machine parts

cable designation

02YH (ST) C11Y 1x2x0,65/2,56-150 LI KF40 FRNC FC VI

electrical data

attenuation factor per length

• at 9.6 kHz / maximum	0.003 dB/m
• at 38.4 kHz / maximum	0.004 dB/m
• at 4 MHz / maximum	0.025 dB/m
• at 16 MHz / maximum	0.049 dB/m

impedance

• rated value	150 Ω
• at 9.6 kHz	270 Ω
• at 38.4 kHz	185 Ω
• at 3 MHz ... 20 MHz	150 Ω

relative symmetrical tolerance

• of the characteristic impedance at 9.6 kHz	10 %
• of the characteristic impedance at 38.4 kHz	10 %
• of the characteristic impedance at 3 MHz ... 20 MHz	10 %

loop resistance per length / maximum

133 m Ω /m

shield resistance per length / maximum

15 Ω /km

insulation resistance coefficient

16000 G Ω ·m

capacity per length / at 1 kHz

28 pF/m

operating voltage

• RMS value	80 V
-------------	------

mechanical data

number of electrical cores

2

design of the shield

Overlapped aluminum-clad foil, sheathed in a braided screen of tinned copper wires

type of electrical connection / FastConnect

Yes

outer diameter

• of inner conductor	0.67 mm
• of the wire insulation	2.56 mm
• of the inner sheath of the cable	5.4 mm
• of cable sheath	8 mm

symmetrical tolerance of the outer diameter / of cable sheath

0.4 mm

material

• of the wire insulation	polyethylene (PE)
• of the inner sheath of the cable	FRNC

<ul style="list-style-type: none"> of cable sheath 	PUR (TPE-U)
color	
<ul style="list-style-type: none"> of the insulation of data wires of cable sheath 	red/green Violet
bending radius	
<ul style="list-style-type: none"> with single bend / minimum permissible with multiple bends / minimum permissible 	40 mm 120 mm
tensile load / maximum	100 N
weight per length	70 kg/km
ambient conditions	
ambient temperature	
<ul style="list-style-type: none"> during operation during storage during transport during installation note 	-20 ... +60 °C -40 ... +60 °C -40 ... +60 °C -40 ... +60 °C Electrical properties measured at 20 °C, tests according to DIN 47250 part 4 respectively DIN VDE 0472
ambient condition / for operation	Limited segment length (see manual for PROFIBUS networks)
fire behavior	flame resistant according to IEC 60332-1-2
class of burning behaviour / according to EN 13501-6	Eca
chemical resistance	
<ul style="list-style-type: none"> to mineral oil to grease to water 	oil resistant according to IEC 60811-2-1 (7x24h/90°C) resistant conditional resistance
radiological resistance / to UV radiation	resistant
product features, product functions, product components / general	
product feature	
<ul style="list-style-type: none"> halogen-free silicon-free 	Yes Yes
standards, specifications, approvals	
UL/ETL listing / 300 V Rating	Yes; c(UL)us, CMX
UL/ETL style / 600 V Rating	No
certificate of suitability	
<ul style="list-style-type: none"> EAC approval CE marking RoHS conformity 	Yes Yes Yes
Marine classification association	
<ul style="list-style-type: none"> American Bureau of Shipping Europe Ltd. (ABS) French marine classification society (BV) Det Norske Veritas (DNV) Germanische Lloyd (GL) Lloyds Register of Shipping (LRS) Nippon Kaiji Kyokai (NK) Polski Rejestr Statkow (PRS) 	No No No No No No No
reference code	
<ul style="list-style-type: none"> according to IEC 81346-2 according to IEC 81346-2:2019 	WG WGB
further information / internet-Links	
Internet-Link	
<ul style="list-style-type: none"> to web page: selection aid TIA Selection Tool to website: Industrial communication to website: Industry Mall to website: Information and Download Center to website: Selection guide for cables and connectors to website: Image database to website: CAx-Download-Manager to website: Industry Online Support 	http://www.siemens.com/tia-selection-tool http://www.siemens.com/simatic-net https://mall.industry.siemens.com http://www.siemens.com/industry/infocenter https://sie.ag/2QdlxcP http://automation.siemens.com/bilddb http://www.siemens.com/cax https://support.industry.siemens.com
last modified:	10/30/2021 