


ITEM	MOLEX P/N	DESCRIPTION	QTY	UOM
A	39014041	MiniFit Jr Rec Hsg SR V-0 4Ckt	1	PC
B	39000077	MiniFit Term Crp Fem Chn Bs Tin 16awg	4	PC
C	--	RESIN BLEND STPRNE	A/R	KG
D	--	MOLD PART INNER CAP	2	PC
E	--	RESIN PP RTP 151 A NAT UL94V-0 HF	A/R	KG

FROM	TO	CABLE DESCRIPTION	COLOR
A1	--	4CX16AWG UNSHD BK UL2464	BLACK
A2	--		RED
A3	--		WHITE
A4	--		GREEN

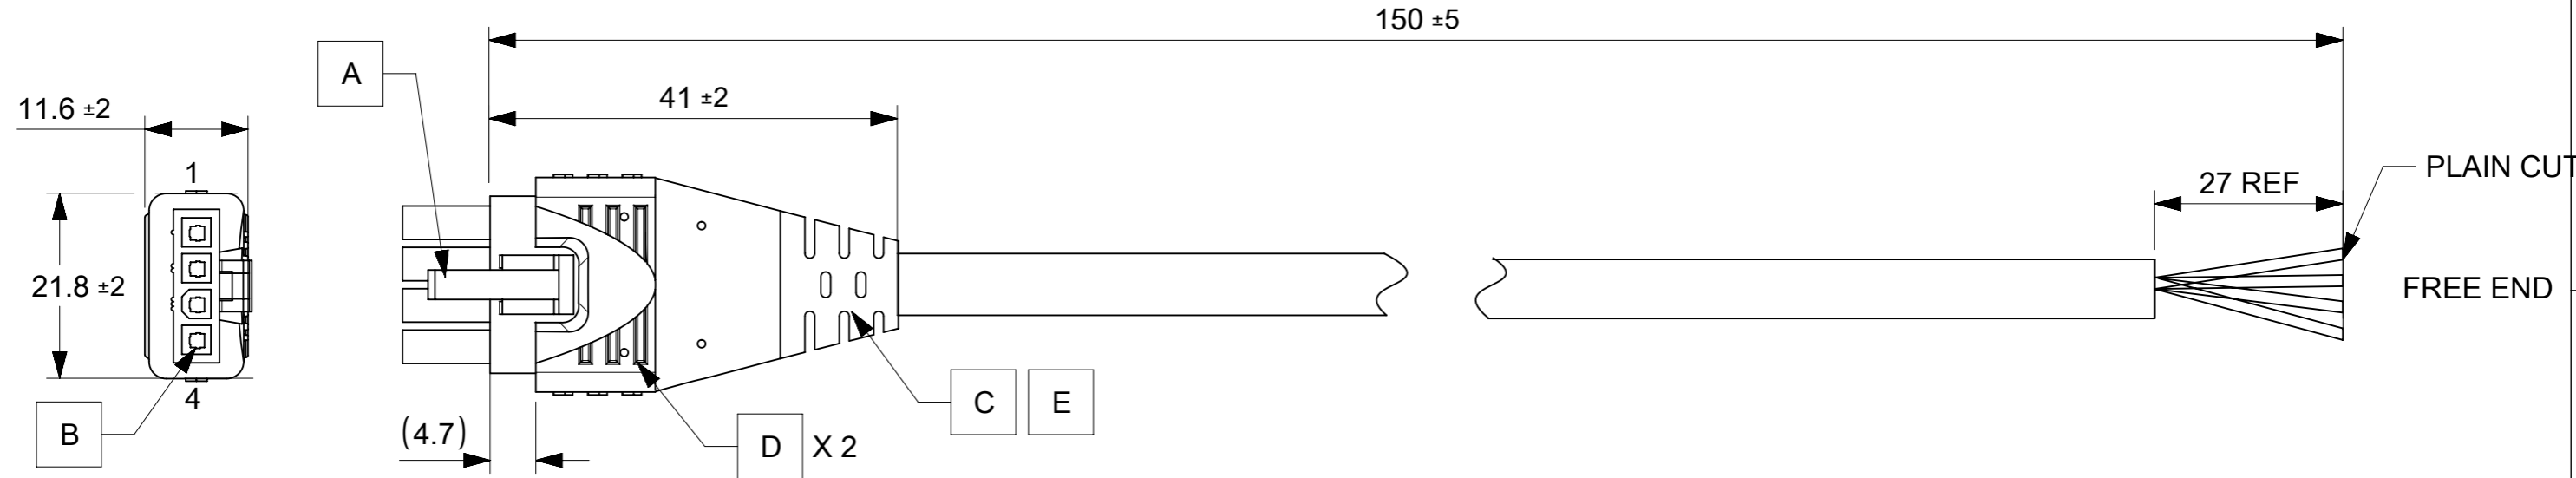

NOTES:

- MOLDING MATERIAL:
 - INNERCAP: PA66 NYLON RESIN.
 - OVERMOLD: SANTOPRENE TPE RESIN.
 - INNERMOLD: PP NAT UL94V-0
- ELECTRICAL PERFORMANCE:
 - VOLTAGE RATING: 300V AC.
 - THIS PRODUCT MUST PASS 100% CONTINUITY TEST PER MOLEX ES-36586-004.
 - DIELECTRONIC STRENGTH: 500V DC/0.01 SEC.
 - INSULATION RESISTANCE: 20M OHMS
- CONNECTOR VIEWS ARE SHOWN FROM MATING SIDE.
- MECHANICAL PERFORMANCE:
 - CABLE HARNESS SHOULD WITHSTAND AN AXIAL FORCE OF 5KGF FOR ONE MINUTE BETWEEN OVERMOLD AND CONNECTOR WITHOUT PHYSICAL DAMAGE.
 - OVERMOLD SIDE CAN PASS THE BENDING TEST IN 100 CYCLES AT EACH OF 2 PLANES, PER EIA364-41 CONDITION I.

FUNCTIONAL SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		CURRENT REV DESC:		molex					
	FUNCTIONAL DIMENSION UNITS	SCALE								
	mm	NTS								
	GENERAL TOLERANCES (UNLESS SPECIFIED)									
DIVISIONAL SYMBOLS	ANGULAR TOL	±			4 CKT OVERMOLD MINIFIT JR PIGTAIL 150MM					
	4 PLACES	±								
	3 PLACES	±								
	2 PLACES	±								
EC NO: 740245		DRWN: PRAVES6		2023/02/24	PRODUCT CUSTOMER DRAWING					
CHK'D: SKUMAR07		APPR: SKUMAR07		2023/03/29						
INITIAL REVISION:		DRWN: SBS04		2020/09/25	DOCUMENT NUMBER					
APPR: RDESAI01		APPR: RDESAI01		2021/03/22						
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIRD ANGLE PROJECTION	DRAWING	SERIES	MATERIAL NUMBER	CUSTOMER	DOC TYPE	DOC PART	REVISION	SHEET NUMBER
			A3-SIZE	217159	2171590400	GENERAL MARKET	PSD	000	C	1 OF 1