

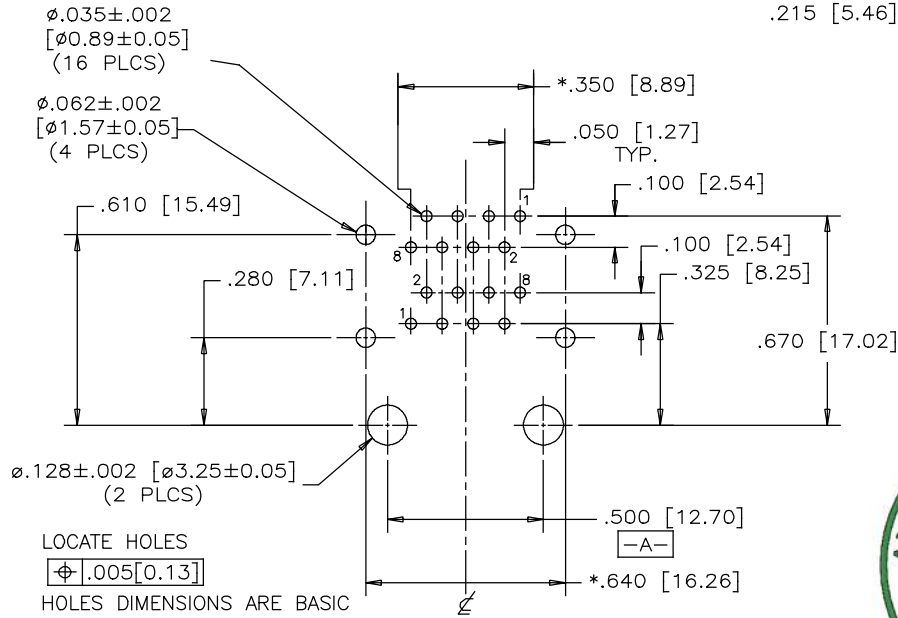
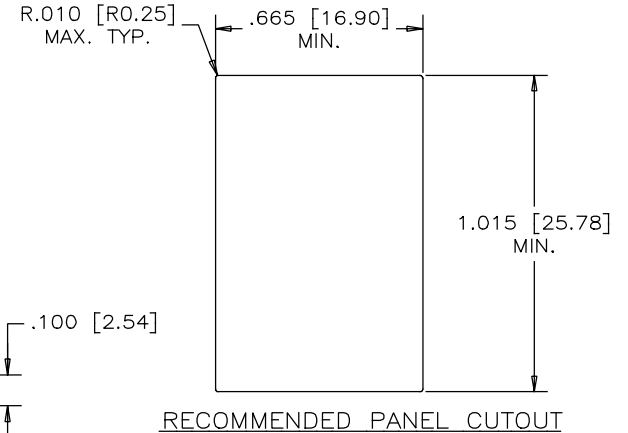


REVISIONS			
REV.	ECN, ERN NO.	DATE	APPRD.
A	PROPOSAL	APR.11/18	L.CHAN

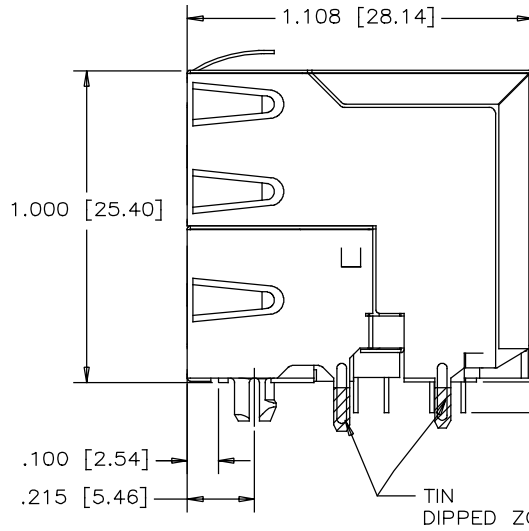

RECOMMENDED P.C.B. LAYOUT
(COMPONENT SIDE OF BOARD)

DIMENSIONS MARKED WITH * ARE SYMMETRICAL ABOUT CENTER LINE AS DEFINED BY DATUM -A-

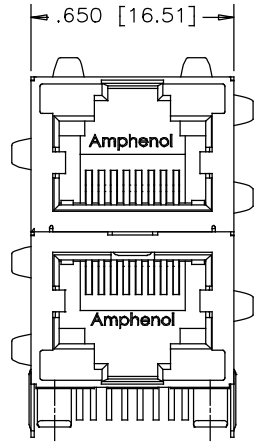

MATERIALS:
CONTACTS: PHOSPHOR BRONZE, SELECTIVELY PLATED GOLD PLATING ON MATING AREAS REFER TO AMPHENOL PART NO. FOR THICKNESS. 50 MICRO" MIN. NICKEL OVERALL. 100 MICRO" MIN. MATTE TIN OR GOLD FLASH ON TAILS.
HOUSING: ENGINEERING THERMOPLASTIC COLOUR - BLACK, FLAMMABILITY RATING UL 94V-0
SHIELD: COPPER ALLOY
PLATING: NICKEL WITH TIN DIPPED PCB TAILS

RECOMMENDED SOLDERING TEMPERATURE:
 WAVE SOLDERING TEMPERATURE AT 260°C MAXIMUM FOR 10 SEC MAXIMUM

AMPHENOL PART NO.: RJSAE-X380-02

GOLD PLATING OPTION:
 D = 6u" GOLD PLATING
 G = 15u" GOLD PLATING
 J = 30u" GOLD PLATING
 5 = 50u" GOLD PLATING

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION AND SUCH INFORMATION MAY NOT BE DISCLOSED TO OTHERS FOR ANY PURPOSE OR USED FOR MANUFACTURING PURPOSES WITHOUT WRITTEN PERMISSION FROM AMPHENOL CANADA CORP.

DRAWN	RONNIE.C	DATE	APR11/18
DESIGNED			
CHECKED	AMY.Z	DATE	APR11/18
I. E. APPRD.			
Q. A. APPRD.			
DWG. APPRD.			
ENG. REL. NO.			
REF.	EAR# RJ18072		
DIMENSIONS ARE IN	CODE ID. NO.		
INCHES [mm]	03554		

Amphenol Canada Corp.	
TITLE 2x1 STACKABLE MODULAR JACK SHIELDED, 8 POSITION, 8 CONTACTS, GOLD PLATING OPTION, WITHOUT LED, - RoHS COMPLIANT	
DWG NO.	P-RJSAE-X380-02
REV.	A
SCALE	WT. _____ SURF. _____ SHEET 1 OF 1