
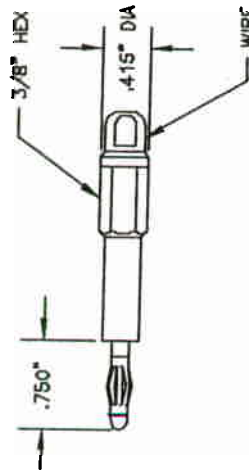


NOTE: UNLESS OTHERWISE SPECIFIED

1. RETRACTABLE SHROUDED BANANA PLUG
 BODY: NICKEL PLATED BERYLLIUM-COPPER
 INSULATOR: POLYACETAL
 PLUG: NICKEL PLATED BRASS
 ELECTRICAL DATA:
 DIELECTRIC WITHSTANDING
 VOLTAGE: 1 KV
 MAX. CURRENT: 15 AMPS

2. WIRE: 18 AWG P.V.C. INSULATION
 65X36 TINNED COPPER, INSULATION
 DIA. .144" THICKNESS .045" MAX.
 WORKING VOLTAGE 5,000 VOLTS
 MAX TEMP. 105C. MAX CURRENT
 5 AMPS.

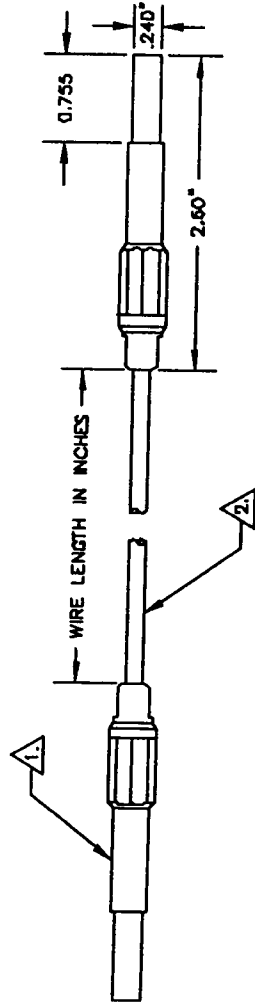

ZONE	LTR	DATE	APPROVED

UNLESS OTHERWISE SPECIFIED CONTRACT NO.		E-Z-HOOK		ARCADA, CA 91006	
DIMENSIONS ARE IN INCHES		RETRACTABLE SHROUDED		DRAWING NO.	
TOLERANCES ARE		BANANA PLUG JUMPER		B 08505 9871-LENGTH	
FRACTIONS DECIMALS ANGLES		DRAWN S.E.W.		CODE IDENT NO.	
.XXX .XXX .XXX		CHECKED		B 08505 9871-LENGTH	
MATERIAL		DATE		SCALE FULL	
SEE NOTE		11/03		SHEET 1	
FINISH				OF 1	
SEE NOTE					
DO NOT SCALE DRAWING					
APPLICATION					
USED ON					
NEXT ASSY					