


# VAL-MS 350/10/3+1

Order No.: 2803593



<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2803593>

Surge arrester for 5-conductor power supply systems (L1, L2, L3, N, PE), consisting of a base element and protective connectors, for mounting on NS 35.

Commercial data	
GTIN (EAN)	4 046356 301961 
sales group	J027
Pack	1 pcs.
Customs tariff	85363010
Catalog page information	Page 34 (TT-2009)

#### Product notes

WEEE/RoHS-compliant since:  
01/01/2008



<http://www.download.phoenixcontact.com>  
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

### Technical data

Standards	
Housing material	PBT / PA
Inflammability class acc. to UL 94	V0
Color	black

Standards for air and creepage distances	DIN EN 60664-1
	EN 61643-11
Degree of protection	IP20
Mounting type	DIN rail: 35 mm
Design	DIN rail module, two-section, divisible
Number of positions	4
Ambient temperature (operation)	-40 °C ... 80 °C
Message: Surge protection fault	Optical
Direction of action	3L-N & N-PE
Width	71.20 mm
Height	65.50 mm
Length	90.00 mm
Pitch unit	4 Div.

**Protective circuit**

IEC category	II
	T2
EN type	T2
Nominal voltage $U_N$	230 V AC (400 V AC)
	400 V AC
	230 V AC
Arrester rated voltage $U_C$	350 V AC
Arrester rated voltage $U_C$ (L-N)	350 V AC
Arrester rated voltage $U_C$ (N-PE)	260 V AC
$U_T$ (TOV-proof)	415 V AC (5 s / L-N)
	1200 V AC (200 ms / N-PE)
Nominal frequency $f_N$	50 Hz (60 Hz)
Ground conductor current $I_{PE}$	$\leq 3 \mu A$
Standby power consumption $P_C$	$\leq 360 \text{ mVA}$
Max. discharge surge current $I_{max}$ (8/20) $\mu s$	10 kA (per channel L-N)
Max. discharge surge current $I_{max}$ (8/20) $\mu s$ maximum (L-N)	30 kA (all channels)
	10 kA (per channel)
Max. discharge surge current $I_{max}$ (8/20) $\mu s$ maximum (N-PE)	30 kA

Nominal discharge surge current $I_n$ (8/20) $\mu$ s (L-N)	15 kA (all channels)
	5 kA (per channel)
Nominal discharge surge current $I_n$ (8/20) $\mu$ s (N-PE)	20 kA
Impulse operate voltage at 6 kV (1.2/50) $\mu$ s (N-PE)	$\leq 1.5$ kV
Protection level $U_p$ (L-N)	$\leq 1.2$ kV
Protection level $U_p$ (N-PE)	$\leq 1.5$ kV
Residual voltage (L-N)	$\leq 1.2$ kV
	$\leq 1.1$ kV (at 3 kA)
Residual voltage (L-PE)	$\leq 1.3$ kV
	$\leq 1.2$ kV (at 3 kA)
Residual voltage (N-PE)	$\leq 150$ V (at 5 kA)
	$\leq 100$ V (at 3 kA)
Response time (L-N)	$\leq 25$ ns
Response time (L-PE)	$\leq 100$ ns
Response time (N-PE)	$\leq 100$ ns
Max. required backup fuse with branch wiring	125 A (gL/gG)
Short-circuit resistance $I_p$ with max. backup fuse (effective)	25 kA
Follow current quenching capacity $I_f$ (N-PE)	100 A

**Connection, protective circuit**

Type of connection	Screw connection
Connection type IN	Biconnect screw terminal block
Connection type OUT	Biconnect screw terminal block
Screw thread	M5
Tightening torque	4.5 Nm
Stripping length	16 mm
Conductor cross section stranded min.	1.5 mm <sup>2</sup>
Conductor cross section stranded max.	25 mm <sup>2</sup>
Conductor cross section solid min.	1.5 mm <sup>2</sup>
Conductor cross section solid max.	35 mm <sup>2</sup>
Conductor cross section AWG/kcmil min.	15
Conductor cross section AWG/kcmil max	2

**Standards**

Standards/regulations	IEC 61643-1 2005
-----------------------	------------------

EN 61643-11/A11 2007

### Certificates / Approvals



Certification


CB, CCA, GOST, KEMA, OEVE

### Accessories

Item	Designation	Description
<b>Bridges</b>		
2809283	MPB 18/4- 8	Wiring bridge for modules with connecting pitch 17.5 mm, 4-phase, 8-pos.
2809296	MPB 18/4-12	Wiring bridge for modules with connecting pitch 17.5 mm, 4-phase, 12-pos.
2818339	MPB F200X16/ 1GS	Wiring bridge flexible, diameter 16 mm <sup>2</sup> , with a fork-type cable lug on one side, length: 200 mm
2818342	MPB F400X16/ 1GS	Wiring bridge flexible, diameter 16 mm <sup>2</sup> , with a fork-type cable lug on one side, length: 400 mm
2818355	MPB F600X16/ 1GS	Wiring bridge flexible, diameter: 16 mm <sup>2</sup> , with a fork-type cable lug on one side, length: 600 mm
<b>General</b>		
2749880	DK-BIC-35	Feed-through terminal block for VAL and FLT applications
<b>Marking</b>		
1051993	B-STIFT	Marker pen, for manual labeling of unprinted Zack strips, smear-proof and waterproof, line thickness 0.5 mm
2749589	ZBN 18,LGS:ERDE	Marking labels, printed horizontally, strips with 5 labels, GND (grounding symbol), color: White
2749576	ZBN 18,LGS:L1-N,ERDE	Marker labels, printed horizontally, strips with 5 labels, L1, L2, L3, N, GND, color: white
0800763	ZBN 18:SO/CMS	Marker labels, 5-section, special printing, labeled according to customer requirements (Please specify the required marking with order), for terminal width: 17.5 mm, color: White
2809128	ZBN 18:UNBEDRUCKT	Unprinted marker labels, strips with 5 labels for individual labeling with M-PEN or CMS system, for terminal block width: 17.5 mm, color: White


## Diagrams/Drawings

### Dimensioned drawing

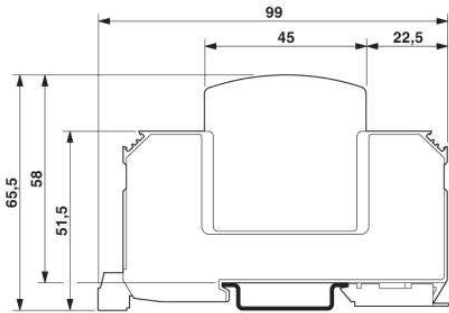

The illustration shows the dimensional drawing for a version with remote indicator contact

### Circuit diagram

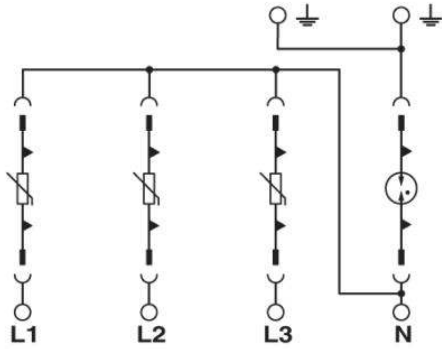

VAL-MS 350/10/3+1 Order No.: 2803593

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2803593>

---

**Address**

PHOENIX CONTACT Deutschland GmbH  
Flachmarktstr. 8  
32825 Blomberg, Germany  
Phone +49 5235 3 12000  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.de>



© 2011 Phoenix Contact  
Technical modifications reserved;