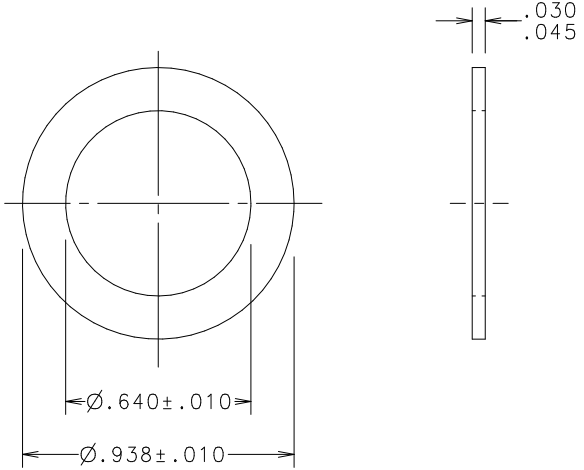

NOTE:

MATERIAL: BLACK, OIL RESISTANT, SYNTHETIC RUBBER SHEET, 75/85 DUROMETER. FLAT SURFACES TO BE SMOOTH & FREE OF DEPRESSIONS AND FLAWS.

NO	COMPONENT NO	DESCRIPTION	QTY/M	U/M
2				
1				

BILL OF MATERIAL

UNLESS OTHERWISE SPECIFIED, DIMENSIONS DO NOT INCLUDE PLATING.

O	DENOTES CRITICAL CHARACTERISTICS.
CPK	DENOTES CPK DIMENSIONS,-MINIMUM CPK VALUE
⟨ST⟩	DENOTES A CHARACTERISTIC THAT PROVIDES AN INDICATION OF PROCESS PERFORMANCE. PROCEDURE FOR MEASUREMENT AND TRACKING TO BE DEFINED IN LITTELFUSE INSPECTION INSTRUCTIONS.
CP	DENOTES CP DIMENSIONS,-MINIMUM CP VALUE MUST BE WITHIN THE DIMENSIONAL LIMITATIONS SHOWN ON DRAWING AND INITIALLY LOCATED TO ALLOW FOR MAXIMUM TOOL LIFE.

LTR	REVISION	CHK	APD
E	39046C-REVISE & REDRAWN IN NEW STRUCTURE 3/30/98 KAM		

COPIES TO

1 9 18
2 10 19
3 12 20
4 13 21
5 14 23
6 15 33
7 16 43
8 17 53

MATL SPEC		FINISH
DRW KAM	DATE 12/10/97	SCALE 4:1
CHK	DATE	SUPER DRW
APPD	DATE	RAW STK WT LBS

TOLERANCE UNLESS OTHERWISE SPECIFIED

TWO PLACE DEC ±.01 FRACTION ±
THREE PLACE DEC ±.005 ANGULAR ±

TITLE

WASHER

Littelfuse®

DES PLAINES, ILLINOIS 60016

REVISION DRWG. NO.

-901-074

UNCONTROLLED DOCUMENT

CAD GENERATED DRAWING - NO PENCIL CHANGES ALLOWED