
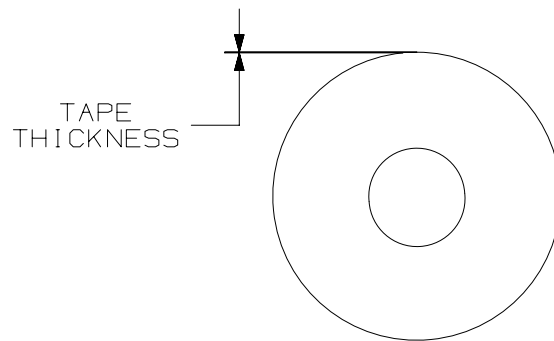


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

Part Number	Width in. (mm) ±.08 [ 2 ]	Length ft. (m) +1.31 [0.4] -.32 [0.1]	Thickness in. (mm) ±.002 [0.05]	Type Package Style	Description	Insulation Color
ST2242-075-15BK	.75 (19)	15 (4.6)	.030 (.76)	Roll Cellophane/Label	Linerless Midgrade Rubber Splice Tape ST2242 Black, .75" x 15' x .030"	BLACK
ST2242-150-15BK	1.50 (25)	15 (4.6)	.030 (.76)		Linerless High Voltage Rubber Tape ST2242 Black, 1.50" x 15' x .030"	BLACK

- NOTES:
- VISIT OUR ON-LINE CATALOG AT WWW.PANDUIT.COM FOR A LIST OF CURRENT PARTS APPLICABLE FOR USE WITH THIS PRODUCT.
  - ALL MATERIALS AND COMPONENTS USED MEET THE MATERIAL RESTRICTIONS OF RoHS (EUROPEAN DIRECTIVE 2011/65/EU ON THE RESTRICTION OF HAZARDOUS SUBSTANCES) AS PROPOSED BY THE RoHS TECHNICAL ADAPTATION COMMITTEE.
  - MATERIAL: EPR RUBBER BACKING WITH ACRYLIC ADHESIVE
  - TEMPERATURE RATING: 90°C CONTINUOUS  
130°C EMERGENCY OVERLOAD.
  - FOR USE FROM 600V TO 69KV
  - FLAME RETARDANT.
  - MOISTURE, CORROSION, UV, AND CHEMICAL RESISTANT.
  - COMPLIANT TO CALIFORNIA PROP. 65

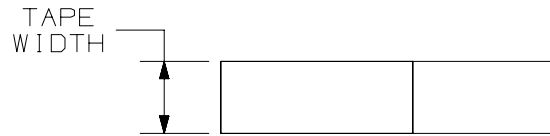

TITLE						<b>Stronghold Linerless Midgrade Rubber Splicing Tape</b>					
CUSTOMER DRAWING											
ITEM REVISION NAME						00803EBU/00					
DATASET FILE NAME						00803EBU_DC/00					
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN (mm)						<b>PANDUIT</b>  MATERIAL:  SEE NOTE3  DRAWING NUMBER: 00803EBU_DC					
.x ± .1 [ 2.54 ]      .xxx ± .005 [ .127 ] .xx ± .01 [ .25 ]      ANGLES ± 1°											
THIRD ANGLE PROJECTION											
DRAWN BY	DATE	CHK	SCALE	SHT 1 OF 1		SIZE		A			
JHNU	11/13/2020	MCHD	NONE								

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
00	11/13/2020	JHNU	MCHD	JADE	INITIAL RELEASE	090033

ANGLOBAL\_ASIZE