



REVISIONS				
P	LTR	DESCRIPTION	DATE	APVD
	B1	ECR-22-136185	18APR2022	JZ WKH

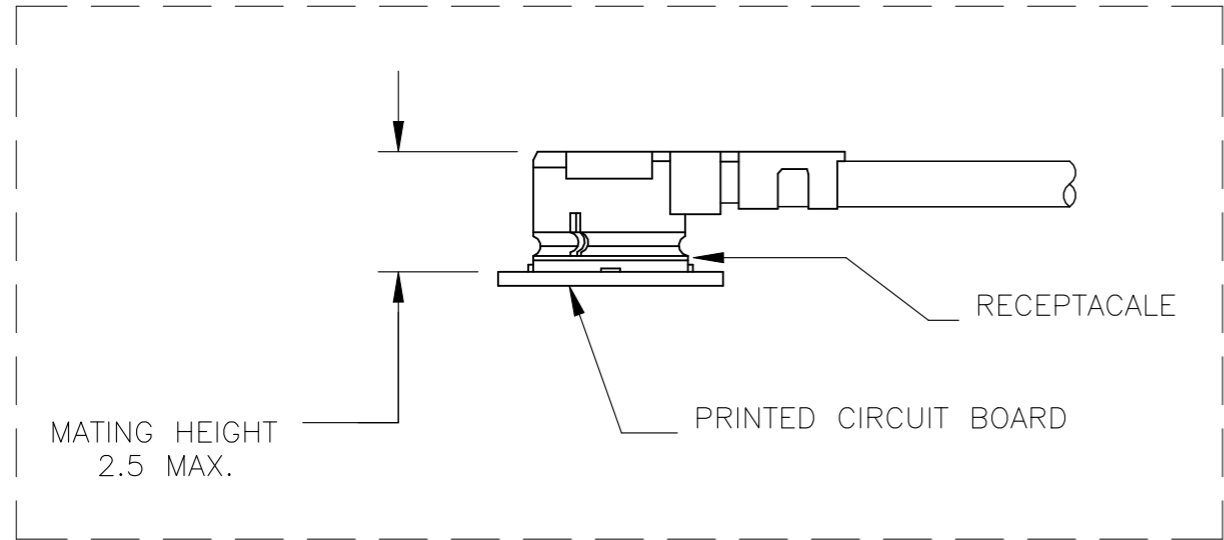

1. PRODUCT AND PROCESSING MUST MEET REQUIREMENTS OF TE CONNECTIVITY STANDARD 230-702.
2. HIROSE COMPATIBLE, 2.5 mm MATING HEIGHT. UMCC CONNECTOR GEN1. FREQUENCY RANGE: 0-9GHz
3. CABLE ASSEMBLY TO BE 100% ELECTRICALLY TESTED FOR OPENS, SHORTS AND CONTINUITY.
4. H.S.T WILL BE 15REF FOR -2
5. CABLE RETENTION FORCE 4N MAX.

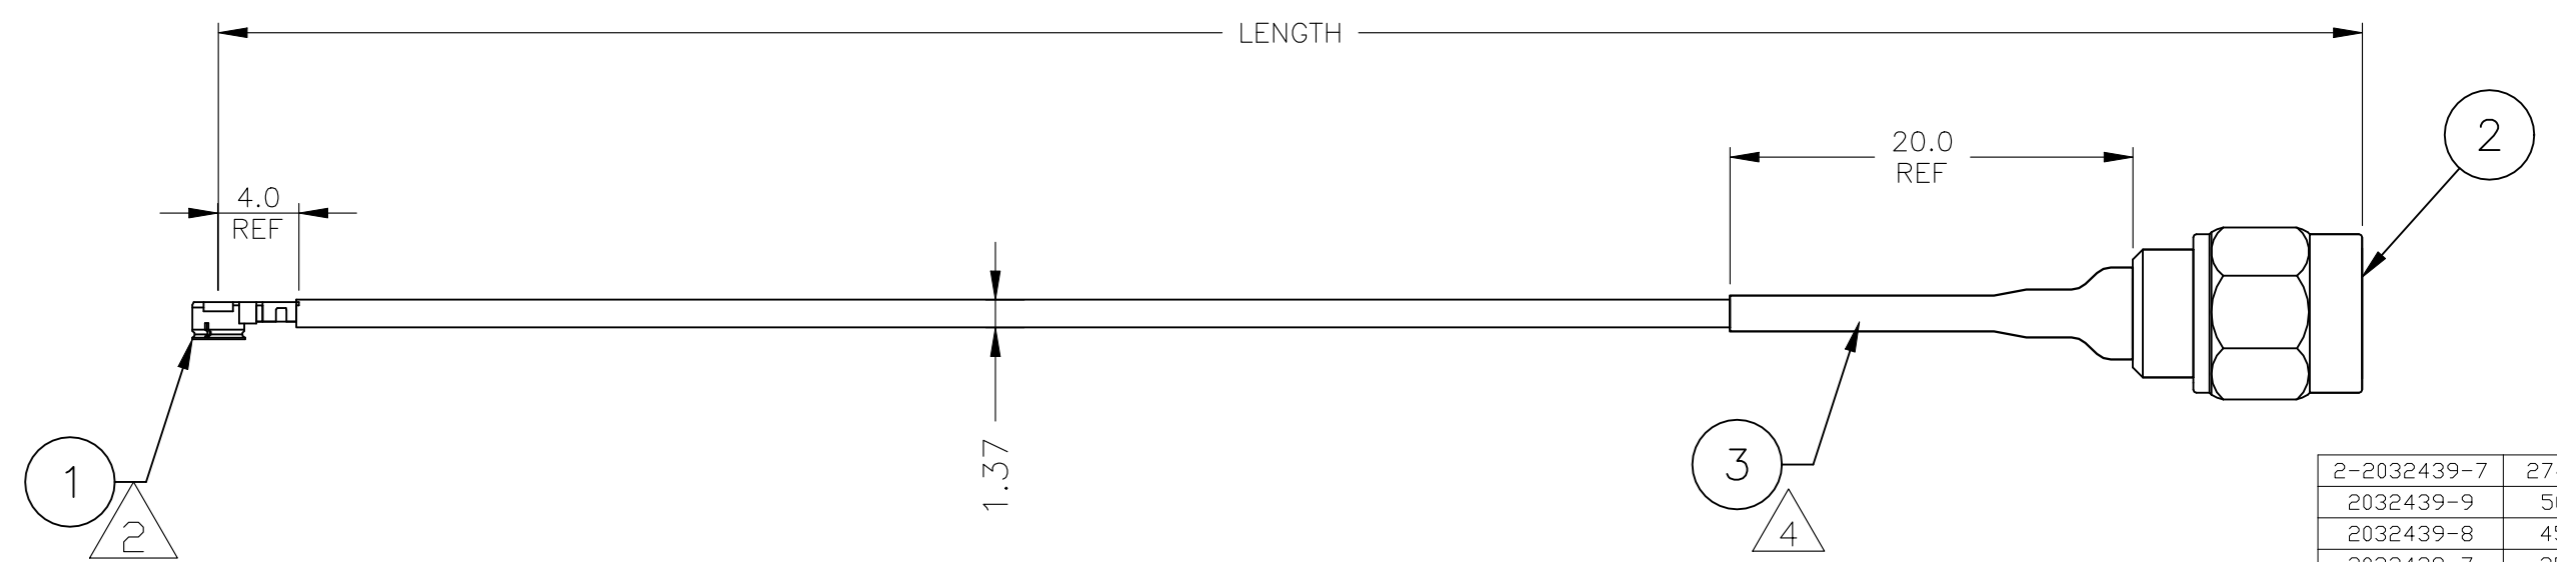

2-2032439-7	2743±15
2032439-9	500±4
2032439-8	450±4
2032439-7	350±3
2032439-6	300±3
2032439-5	250±3
2032439-4	150±3
2032439-3	100±3
2032439-2	50±2
2032439-1	200±3
PART NUMBER	LENGTH

1	PC	TUBING, ADHESIVE HEAT SHRINK	3
1	PC	SMA, PLUG	2
1	PC	UMCC GEN1 PLUG WITH 1.37 CABLE	1
Q'TY	U/M	DESCRIPTION	ITEM

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN E.C. CLAYBAUGH 04/DEC/07	STE TE Connectivity	
DIMENSIONS: mm [INCHES]		CHK J. ORNER 04/DEC/07		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD J. ORNER 04/DEC/07	NAME CABLE ASSY, RF, UMCC GEN1 PLUG TO SMA PLUG [1.37mm CABLE]	
0 PLC ± -		PRODUCT SPEC	-	
1 PLC ± -		APPLICATION SPEC	-	
2 PLC ± -		WEIGHT 0.000000	SIZE A3	CAGE CODE 00779
3 PLC ± -		FINISH -	DRAWING NO C-2032439	
4 PLC ± -			RESTRICTED TO -	
ANGLES ± -		CUSTOMER DRAWING		
MATERIAL -		SCALE N.T.S.		SHEET 1 OF 1
				REV B1