

AMP | AMP M Series

TE Internal #: 530153-2

Board-to-Board Jumpers & Shunts, Tandem Spring, Open Top, 2 Position, .1 in [2.54 mm] Centerline, Signal, -85 – 221 °F [-65 – 105 °

C], AMP M Series

View on TE.com >



Connectors > PCB Connectors > Board-to-Board Connectors > Board-to-Board Jumpers & Shunts











Shunt Type: Tandem Spring

Shunt Style: Open Top

Connector System: Board-to-Board

Number of Positions: 2

Centerline (Pitch): 2.54 mm [.1 in]

Contact Mating Area Plating Material

Features

Product Type Features	
Connector System	Board-to-Board
Connector & Contact Terminates To	Printed Circuit Board
Configuration Features	
Number of Positions	2
Electrical Characteristics	
Termination Resistance	20 mΩ
Insulation Resistance	1000 ΜΩ
Body Features	
Handle	Without
Primary Product Color	Black
Contact Features	
	30 μin

Gold



Contact Base Material	Phosphor Bronze
Shunt Type	Tandem Spring
Shunt Style	Open Top
Contact Current Rating (Max)	3 A
Housing Features	
Housing Material	Nylon, Polyester
Centerline (Pitch)	2.54 mm[.1 in]
Dimensions	
Product Height	9.14 mm[.36 in]
Usage Conditions	
Operating Temperature Range	-65 – 105 °C[-85 – 221 °F]
Operation/Application	
operation, application	
Circuit Application	Signal
	Signal
Circuit Application	Signal CSA Certified, UL Recognized
Circuit Application Industry Standards	
Circuit Application Industry Standards Approved Standards	CSA Certified, UL Recognized
Circuit Application Industry Standards Approved Standards UL Flammability Rating	CSA Certified, UL Recognized
Circuit Application Industry Standards Approved Standards UL Flammability Rating Packaging Features	CSA Certified, UL Recognized UL 94V-0

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Not applicable for solder process capability



Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts







Also in the Series | AMP M Series



Board-to-Board Jumpers & Shunts(7)




Rack & Panel Connectors(1)



Rectangular Connector Hardware(51)



Rectangular Power Connectors(66)

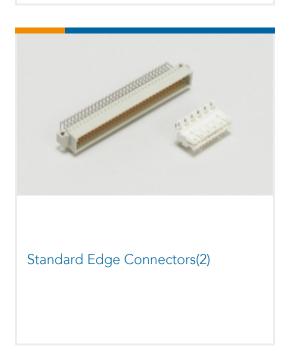

Customers Also Bought



















Documents

Product Drawings

TDM SPRING SHUNT ASSY 2 POS

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_530153-2_AB.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_530153-2_AB.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_530153-2_AB.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages

AMPMODU_INTERCONNECTION_SYSTEM_SECTION_6_7AND8

English

Product Specifications

Application Specification

English

Tandem Spring Shunt Connectors

English



Product Environmental Compliance

Product Compliance Document

English

Product Compliance Document

English

Instruction Sheets

Instruction Sheet (U.S.)

English

Tandem Spring Shunt Connector 530153

English

Agency Approvals

Agency Approval Document

English