CIOD I CIX, IIIO.	Drawing Title: NEMA 5-15P (TYPE B) 2 CONDUCTOR + GROUND PLUG to NEMA 5-15R 3-Prong Household Female Connector, GT Cable #158-3C: 10 / 3 Conductors, mm OD, SJTW, 60° Deg.C, 300V, BLK/WHT/GRN, Approvals: , 40000.0±120.0mm, GlobTek Black	
•	Model No. Power Cord	
Northvale, NJ 07647		
Tel. (201) 784-1000	Part No./Ordering No. 30215840M0302R(R)	Rev C
Fax (201) 784-0111		

In Addition to GlobTek Inc.'s renewed ISO9001:2008 - Quality Management System Certification, GlobTek Inc. is now certified to:

ISO13485:2003 - Medical Devices Quality Management System Certification

ISO14001:2004 - Environmental Management System Certification

ISO Certificates are available online at https://www.globtek.com/iso-certificates/

Prop 65 Statement:https://en.globtek.com/prop-65-statement.pdf

The acceptance of this specification and use of the product described in this document indicates the acceptance and binding of the customer to Globtek TERMS AND CONDITIONS (attached to the end of this document), which supersede all other agreements, terms, and conditions (https://en.globtek.com/terms-and-conditions/).

The purchaser of this product (Customer) agrees that it is their sole responsibility to determine suitability/fitness of the product described in this specification for their application and to take precautions for protection against any hazards attendant to the handling and use of the product.

Footnote:

GlobTek Inc. will not be liable for the safety and performance of these power supplies if unauthorized access and repair occurs. End user should consult applicable UL, CSA or EN standards for proper installation instruction.

Limitation of Use:

GlobTek products are intended for use with commercial, medical, and/or industrial equipment only. GlobTek product are not authorized for use as mission critical components in life support hazardous environment, nuclear or aircraft applications without prior written approval from the CEO of GlobTek Inc.

Contents of this document are subject to change without prior notice.

, , ,

Customer Approval of Specification:

Please approve, sign and send back to GlobTek so we can complete order processing.

A delay in receipt of this form will delay delivery schedule.

Company Name:	Customer P/N:
Quote Number:	Date:
Authorized Representative Name:	Authorized Representative Signature:

CIOD I CIX, IIIO.	Drawing Title: NEMA 5-15P (TYPE B) 2 CONDUCTOR + GROUND PLUG to NEMA 5-15R 3-Prong Household Female Connector, GT Cable #158-3C: 10 / 3 Conductors, mm OD, SJTW, 60° Deg.C, 300V, BLK/WHT/GRN, Approvals: , 40000.0±120.0mm, GlobTek Black		
•	flodel No. Power Cord		
Northvale, NJ 07647			
Tel. (201) 784-1000	Part No./Ordering No. 30215840M0302R(R)	Rev C	
Fax (201) 784-0111			

REVISION HISTORY

REV	DESCRIPTION		DATE	APPROVED
С			12/29/2021	QA
В	B Update barcode label 0		08/19/2021	QA
A2	Individual box dimensions to 33*33*20.5 cm, add barcode label info for each individual box	QA	07/20/2021	QA
A1	Add packing info to deviation	QA	04/19/2021	QA
Α	Initial release	bsiep	03/11/2021	вов

Cordset Information:


CordsetColor:GlobTek Black

Cord Length (mm):40000.0±120.0


NOTES:

Cord, Plug and Connector must be marked with approval symbols of file number(s)

CIOD I CIX, IIIO.	Drawing Title: NEMA 5-15P (TYPE B) 2 CONDUCTOR + GROUND PLUG to NEMA 5-15R 3-Prong Household Female Connector, GT Cable #158-3C: 10 / 3 Conductors, mm OD, SJTW, 60° Deg.C, 300V, BLK/WHT/GRN, Approvals: , 40000.0±120.0mm, GlobTek Black		
•	flodel No. Power Cord		
Northvale, NJ 07647			
Tel. (201) 784-1000	Part No./Ordering No. 30215840M0302R(R)	Rev C	
Fax (201) 784-0111			

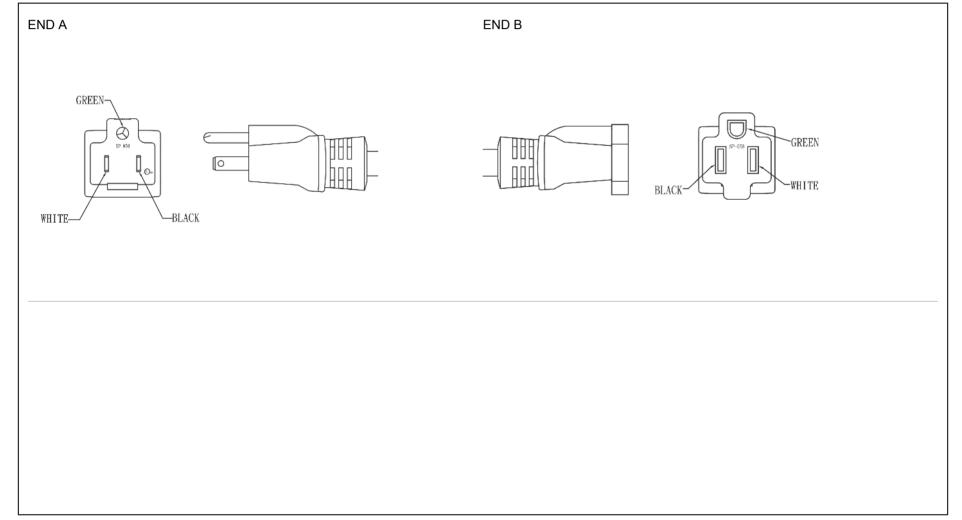

CIOD I CIN, II IO.	Drawing Title: NEMA 5-15P (TYPE B) 2 CONDUCTOR + GROUND PLUG to NEMA 5-15R 3-Prong Household Female Connector, GT Cable #158-3C: 10 / 3 Conductors, mm OD, SJTW, 60° Deg.C, 300V, BLK/WHT/GRN, Approvals: , 40000.0±120.0mm, GlobTek Black		
	Model No. Power Cord		
Northvale, NJ 07647			
Tel. (201) 784-1000	Part No./Ordering No. 30215840M0302R(R)	Rev C	
Fax (201) 784-0111			

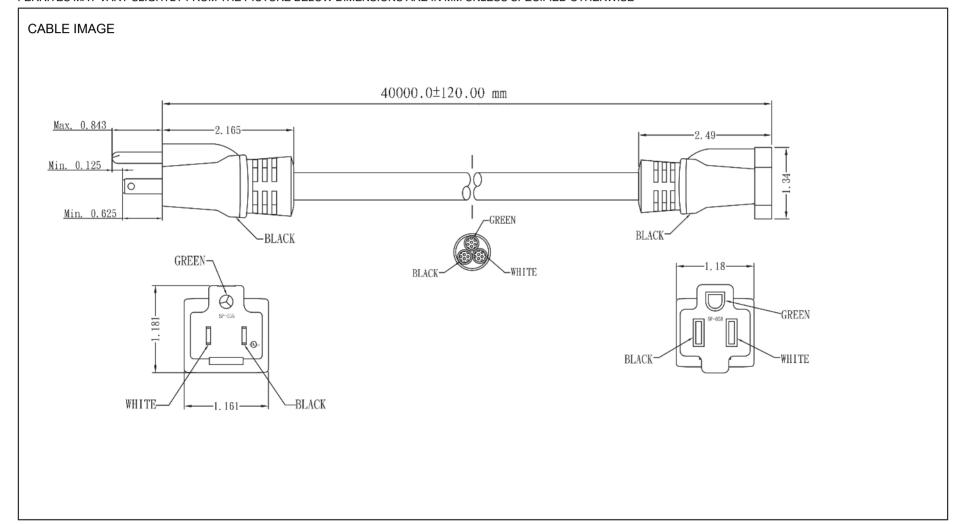

CIOD I CIX, IIIO.	RLK/WHT/CPN_Approvals: 40000 0+120 0mm, GlobTak Black		
•	Model No. Power Cord		
Northvale, NJ 07647			
Tel. (201) 784-1000	Part No./Ordering No. 30215840M0302R(R)	Rev C	
Fax (201) 784-0111			

End A	Cable	End B
Code:302(SP-056)	Code:158-3C	Code:302R(SP-058)
Description:NEMA 5-15P (TYPE B) 2 CONDUCTOR +	Description:GT Cable #158-3C: 10 / 3 Conductors, mm OD,	Description:NEMA 5-15R 3-Prong Household Female
GROUND PLUG	SJTW, 60° Deg.C, 300V, BLK/WHT/GRN, Approvals:	Connector
Rating (V):125	Color:GlobTek Black	Rating (V):125
Rating (A):15.0	Wire Gauge(AWG):10	Rating (A):15.0
Gender:Male	Cond:3	Gender:Male
Overmolded:Yes	Type:SJTW	Overmolded:Yes
	Temperature:60°° C	
	Amps:	
	Volts:300	
	OD:	
	ConductorsColors:BLK/WHT/GRN	

Overall cable rating:

Plug Approvals		Cable Approvals		Connector Approvals	
CULUS	UL/CUL	CULUS	UL/CUL	CULUS	UL/CUL
UL 817 LINK TO CERT		UL 817 LINK TO CERT		UL 817 LINK TO CERT	
AGENCY ONLINE DOCUMENTS	http://er	n.globtek.com/cordsets/			
RoHS/RoHS3 Declaration	https://v	vww.globtek.com/pdf/rohs_cert/01	t3a000005lhGYAA0		
REACH Declaration	https://v	vww.globtek.com/pdf/iso_certificat	tes/REACH.pdf		
Conflict Minerals Declaration	https://v	vww.globtek.com/pdf/conflict-mine	erals.pdf		
Prop 65 Statement	https://e	en.globtek.com/prop-65-statement	.pdf		
CE.UKCA.Cord	https://g	lobtek.secure.force.com/spec/ec_	_decl_product_model_family_	_incl_cord?id=01t3a000005lhGY	

PROPRIETARY INFORMATION


CIOD I CIX, IIIC.	Drawing Title: NEMA 5-15P (TYPE B) 2 CONDUCTOR + GROUND PLUG to NEMA 5-15R 3-Prong Household Female Connector, GT Cable #158-3C: 10 / 3 Conductors, mm OD, SJTW, 60° Deg.C, 300V, BLK/WHT/GRN, Approvals: , 40000.0±120.0mm, GlobTek Black		
	Model No. Power Cord		
Northvale, NJ 07647			
Tel. (201) 784-1000	Part No./Ordering No. 30215840M0302R(R)	Rev C	
Fax (201) 784-0111			

CUSTOMIZED LENGTHS, COLORS, CABLE TYPES, TERMINATIONS/PLUGS/RECEPTACLES AVAILABLE UPON REQUEST. ADDITIONAL PLUG OPTIONS ARE AVAILABLE AT https://www.globtek.com/connectors/ STANDARD PLUGS AND CONNECTORS CAN BE SEEN ONLINE AT https://www.globtek.com/connectors/ ACTUAL CONNECTORS, OVERMOLDS, FERRITES MAY VARY SLIGHTLY FROM THE PICTURE BELOW DIMENSIONS ARE IN MM UNLESS SPECIFIED OTHERWISE

IPXY rating is based on 3rd party testing and customers should check suitability and test system level IPXY rating before ordering.			

CIOD I CIX, II IC.	Drawing Title: NEMA 5-15P (TYPE B) 2 CONDUCTOR + GROUND PLUG to NEMA 5-15R 3-Prong Household Female Connector, GT Cable #158-3C: 10 / 3 Conductors, mm OD, SJTW, 60° Deg.C, 300V, BLK/WHT/GRN, Approvals: , 40000.0±120.0mm, GlobTek Black		
186 Veterans Drive,	Model No. Power Cord		
Northvale, NJ 07647			
Tel. (201) 784-1000	Part No./Ordering No. 30215840M0302R(R)	Rev C	
Fax (201) 784-0111			


Hanking:COIL 302-302R Description:COIL 302-302R Image:



Notes/Modifications/Customizations (notes in this section supersede the values shown in the standard spec):

According to UL817, the cable length can't be more than 100ft (30.5m) so this 40m and cable is made from UL approved components (Plug, connector, cable) but the assembly itself does NOT meet UL standards. The Plug and connector do not carry UL marks although the cable will.

CIODICK, IIIC.	Drawing Title: NEMA 5-15P (TYPE B) 2 CONDUCTOR + GROUND PLUG to NEMA 5-15R 3-Prong Household Female Connector, GT Cable #158-3C: 10 / 3 Conductors, mm OD, SJTW, 60° Deg.C, 300V, BLK/WHT/GRN, Approvals: , 40000.0±120.0mm, GlobTek Black Model No. Power Cord		
Northvale, NJ 07647			
Tel. (201) 784-1000	Part No./Ordering No. 30215840M0302R(R)	Rev C	
Fax (201) 784-0111			

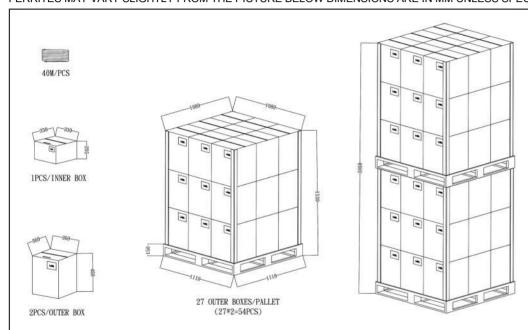

Packing:

Individual box dimensions: 33*33*20.5cm/0.55kg

Big box dimensions: 36*36*46cm /1.05kg

CIOD I CIX, IIIO.	Drawing Title: NEMA 5-15P (TYPE B) 2 CONDUCTOR + GROUND PLUG to NEMA 5-15R 3-Prong Household Female Connector, GT Cable #158-3C: 10 / 3 Conductors, mm OD, SJTW, 60° Deg.C, 300V, BLK/WHT/GRN, Approvals: , 40000.0±120.0mm, GlobTek Black Model No. Power Cord		
•			
Northvale, NJ 07647			
Tel. (201) 784-1000	Part No./Ordering No. 30215840M0302R(R)	Rev C	
Fax (201) 784-0111			

