
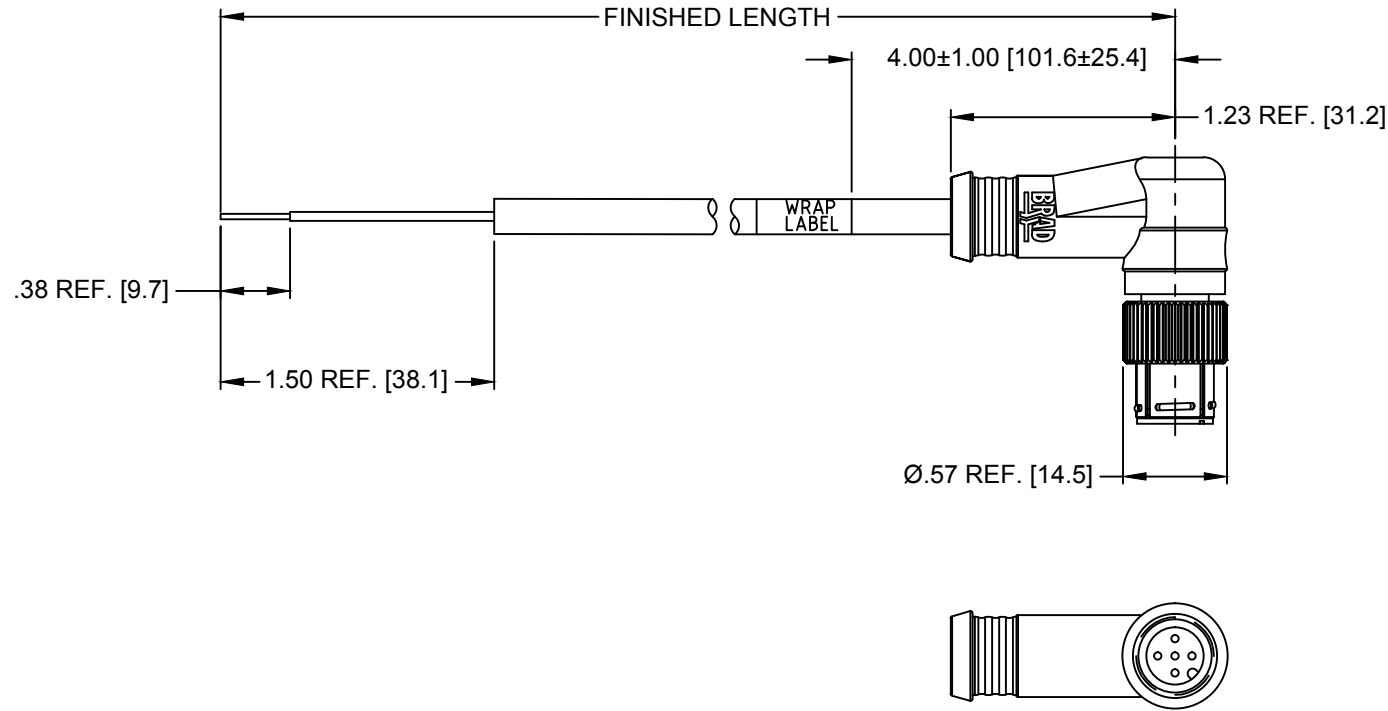


MATERIAL NUMBER	ENGINEERING NUMBER	FINISHED LENGTH
1211930014	T03007B30M003	0.3 M +1.9 CM/-0 [1.0' +0.75"/-0]
1211930015	T03007B30M010	1.0 M +5.6 CM/-0 [3.3' +2.19"/-0]

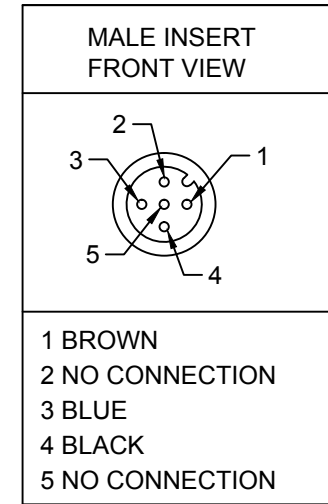

T03007B30M020

WIRE TYPE
0.34mm² [22 AWG] BLACK

CABLE LENGTH
M003----0.3 METER
M020----2 METER
M100----10 METER

MECHANICAL
CONTACT : GOLD/NICKEL OVER COPPER ALLOY
INSERT : BLACK NYLON
COUPLING NUT: NICKEL PLATED COPPER ALLOY
MOLDED BODY: BLACK TPE
CABLE: 0.34mm² [22 AWG] 3 CONDUCTORS BLACK JACKET
WRAP LABEL: MYLAR YELLOW WITH BLACK LETTERS

ELECTRICAL
VOLTAGE RATING: 250V AC/DC
AMPERAGE: 4A

ENVIRONMENTAL
PROTECTION: IP67

OPERATION TEMP: -20°C~80°C

THE RECOMMENDED FEMALE CONNECTOR SHOULD HAVE NICKEL PLATING ON THE FEMALE THREADS

INITIAL RELEASE EC NO: IPG2015-1880 DRWN: KJOZWIK 2015/04/29 CHKD: VOU 2015/04/29 APPR: BWOODMAN 2015/05/12	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE INCH [MM]		SCALE 1:1	DESIGN UNITS INCH	THIRD ANGLE PROJECTION	
	▼=0 ▽=0	4 PLACES	mm ±---	INCH ±---	DRAWN BY KJOZWIK	DATE 2014/02/13	MIC 3P MALE PUSHLOCK 90 DEGREE BLACK TPU		
		3 PLACES	mm ±---	INCH ±---	CHECKED BY VOU	DATE 2015/04/29			
		2 PLACES	mm ±---	INCH ±---	APPROVED BY BWOODMAN	DATE 2015/05/12	MOLEX INCORPORATED		
	1 PLACE	mm ±---	INCH ±---	ANGULAR ±.5°		MATERIAL NO. SEE CHART		DOCUMENT NO. SD-121193-006	
	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SIZE B		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION				
A	REV					SHEET NO. 1 OF 1			