

4



3

2

1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
DS	—		A	RELEASED	12.JUN'12	SE	JK

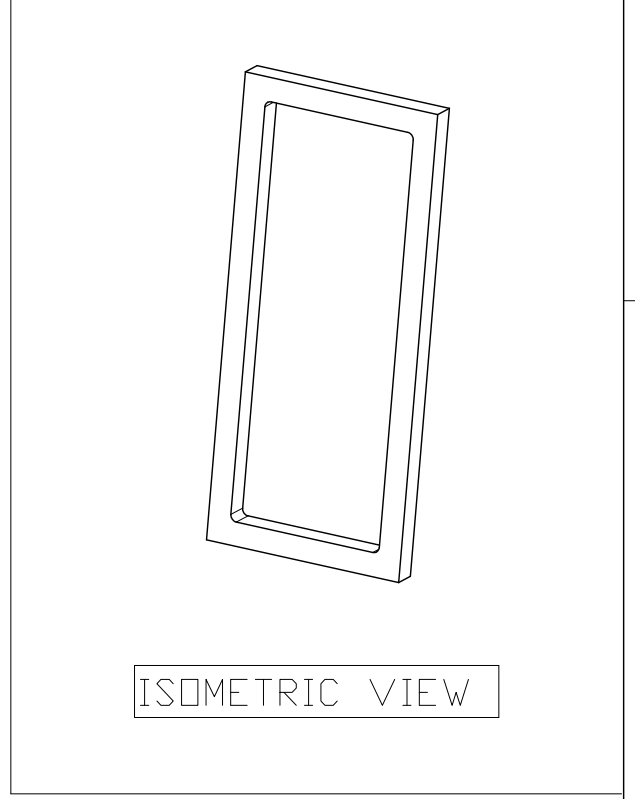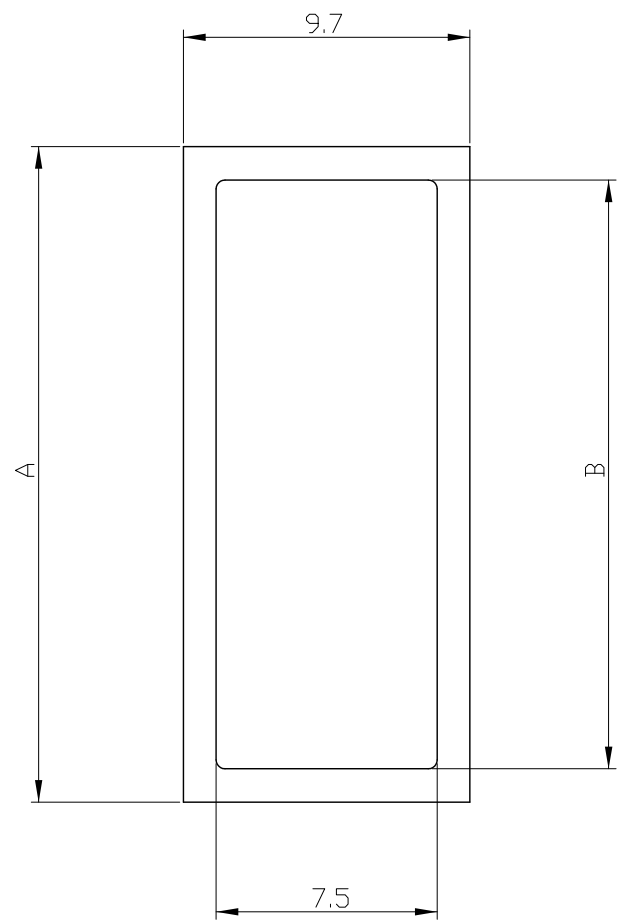

NOTES.

- △ MATERIAL; DIECUT URETHANE FOAM.
- 2. APPLICABLE CONN. P/N: 794894-X
794805-X
794895-X
794781-X

19.9	22.1	10	1-1897989-0	BLACK
11.6	13.9	6	1897989-6	BLACK
7.5	9.7	4	1897989-4	BLACK
3.3	5.5	2	1897989-2	BLACK
DIM B	DIM A	Pos.	P/N	COLOR

THIS DRAWING IS A CONTROLLED DOCUMENT FOR TYCO ELECTRONICS CORPORATION
IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION
SHOULD BE CONTACTED FOR THE LATEST REVISION.

DIMENSIONS:	TOLERANCES UNLESS OTHERWISE SPECIFIED:
mm	
	0 PLC ± 1 PLC ± 2 PLC ± 0.3 3 PLC ± 4 PLC ± ANGLES ±
MATERIAL	FINISH
	—

DWN JH GONG		TE Connectivity	
CHK BW KANG			
APVD JK SONG		NAME	
PRODUCT SPEC		I/F SEAL FOR MINI MATE-N-LOCK	
APPLICATION SPEC		RESTRICTED TO	
SIZE	CAGE CODE	DRAWING NO	
A3		1897989	
CUSTOMER DRAWING		SCALE 4:1	SHEET 1 OF 1 REV A