
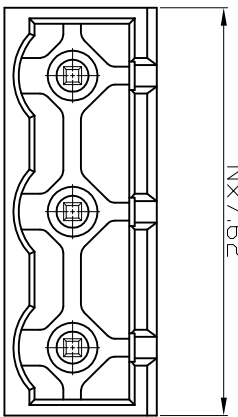
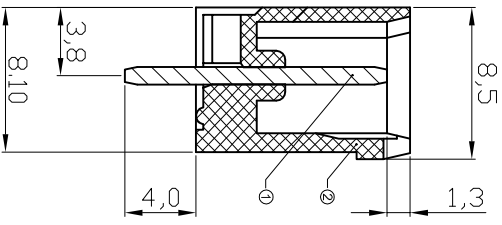
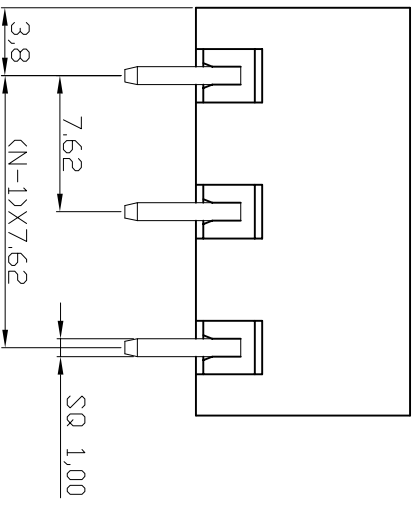


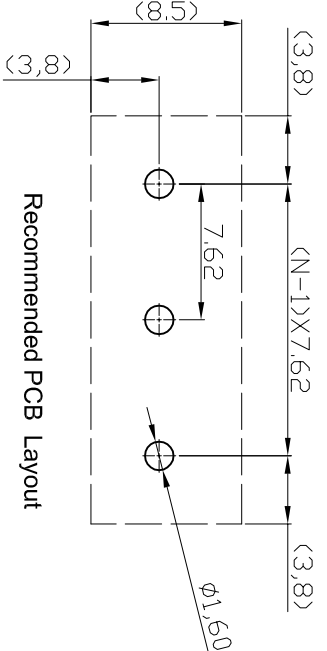


1	2	3	4	5	6	7																																																															
A																																																																					
B																																																																					
C																																																																					
D	 <p data-bbox="606 1590 638 1915">Recommended PCB Layout</p>																																																																				
E	<p data-bbox="574 504 598 750">N=Number of contacts</p>																																																																				
F	<p data-bbox="399 156 446 504">RoHS compliant</p>  <p data-bbox="271 257 311 526">File No.: E349947</p>																																																																				
G	<table border="1" data-bbox="87 571 446 1680"> <tr> <td>Scale</td> <td>1:1</td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>TOLERANCE</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>X.</td> <td>±0.50</td> <td></td> <td></td> <td>Drawn</td> <td>19.03.2009</td> <td>Dean</td> </tr> <tr> <td>X.X</td> <td>±0.30</td> <td></td> <td></td> <td>Approved</td> <td>19.04.2016</td> <td>Winnie</td> </tr> <tr> <td>X.XX</td> <td>±0.10</td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>DIM</td> <td>TOL</td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>X.°</td> <td>±1°</td> <td></td> <td></td> <td>Drawn</td> <td>19.04.2016</td> <td>Winnie</td> </tr> <tr> <td>X.X°</td> <td>±X°</td> <td></td> <td></td> <td>Drawn</td> <td>19.03.2009</td> <td>Dean</td> </tr> <tr> <td>Angle</td> <td>TOL</td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> </table>						Scale	1:1						TOLERANCE							X.	±0.50			Drawn	19.03.2009	Dean	X.X	±0.30			Approved	19.04.2016	Winnie	X.XX	±0.10						DIM	TOL						X.°	±1°			Drawn	19.04.2016	Winnie	X.X°	±X°			Drawn	19.03.2009	Dean	Angle	TOL					
Scale	1:1																																																																				
TOLERANCE																																																																					
X.	±0.50			Drawn	19.03.2009	Dean																																																															
X.X	±0.30			Approved	19.04.2016	Winnie																																																															
X.XX	±0.10																																																																				
DIM	TOL																																																																				
X.°	±1°			Drawn	19.04.2016	Winnie																																																															
X.X°	±X°			Drawn	19.03.2009	Dean																																																															
Angle	TOL																																																																				
H	1	2	3	4	5	7																																																															
H	<table border="1" data-bbox="87 1680 446 2128"> <tr> <td>Customer-No.</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>ASSMANN WSW-No.</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>A-TB762-0QXXCV</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>Drawing-No.</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>ASS 3419 CO</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>Replace</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>rev02</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>Sheet</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> </table>						Customer-No.							ASSMANN WSW-No.							A-TB762-0QXXCV							Drawing-No.							ASS 3419 CO							Replace							rev02							Sheet													
Customer-No.																																																																					
ASSMANN WSW-No.																																																																					
A-TB762-0QXXCV																																																																					
Drawing-No.																																																																					
ASS 3419 CO																																																																					
Replace																																																																					
rev02																																																																					
Sheet																																																																					
H	 <p data-bbox="119 1680 231 1780">W.S.W./components</p>																																																																				
H	<p data-bbox="1125 1523 1420 2060"> NOTES: MATERIAL 1.Item Ø Contact pin: Brass(CuZn) Tin plated 2.Item Ø Insulator (housing):Thermoplastic (UL 94V-0),green ELECTRICAL 1.Current Rating : 20A 2.Voltage Rating : 300V 3.Withstand Voltage : 1.6KV ENVIRONMENTAL 1.Soldering Temperature: 250°C ±10°C/5 Sec 2.Operating Temperature: -40°C to +115°C 3.Safety approval: us </p>																																																																				
H	1	2	3	4	5	7																																																															
H	<p data-bbox="39 2139 71 2206">SV1387</p>																																																																				