

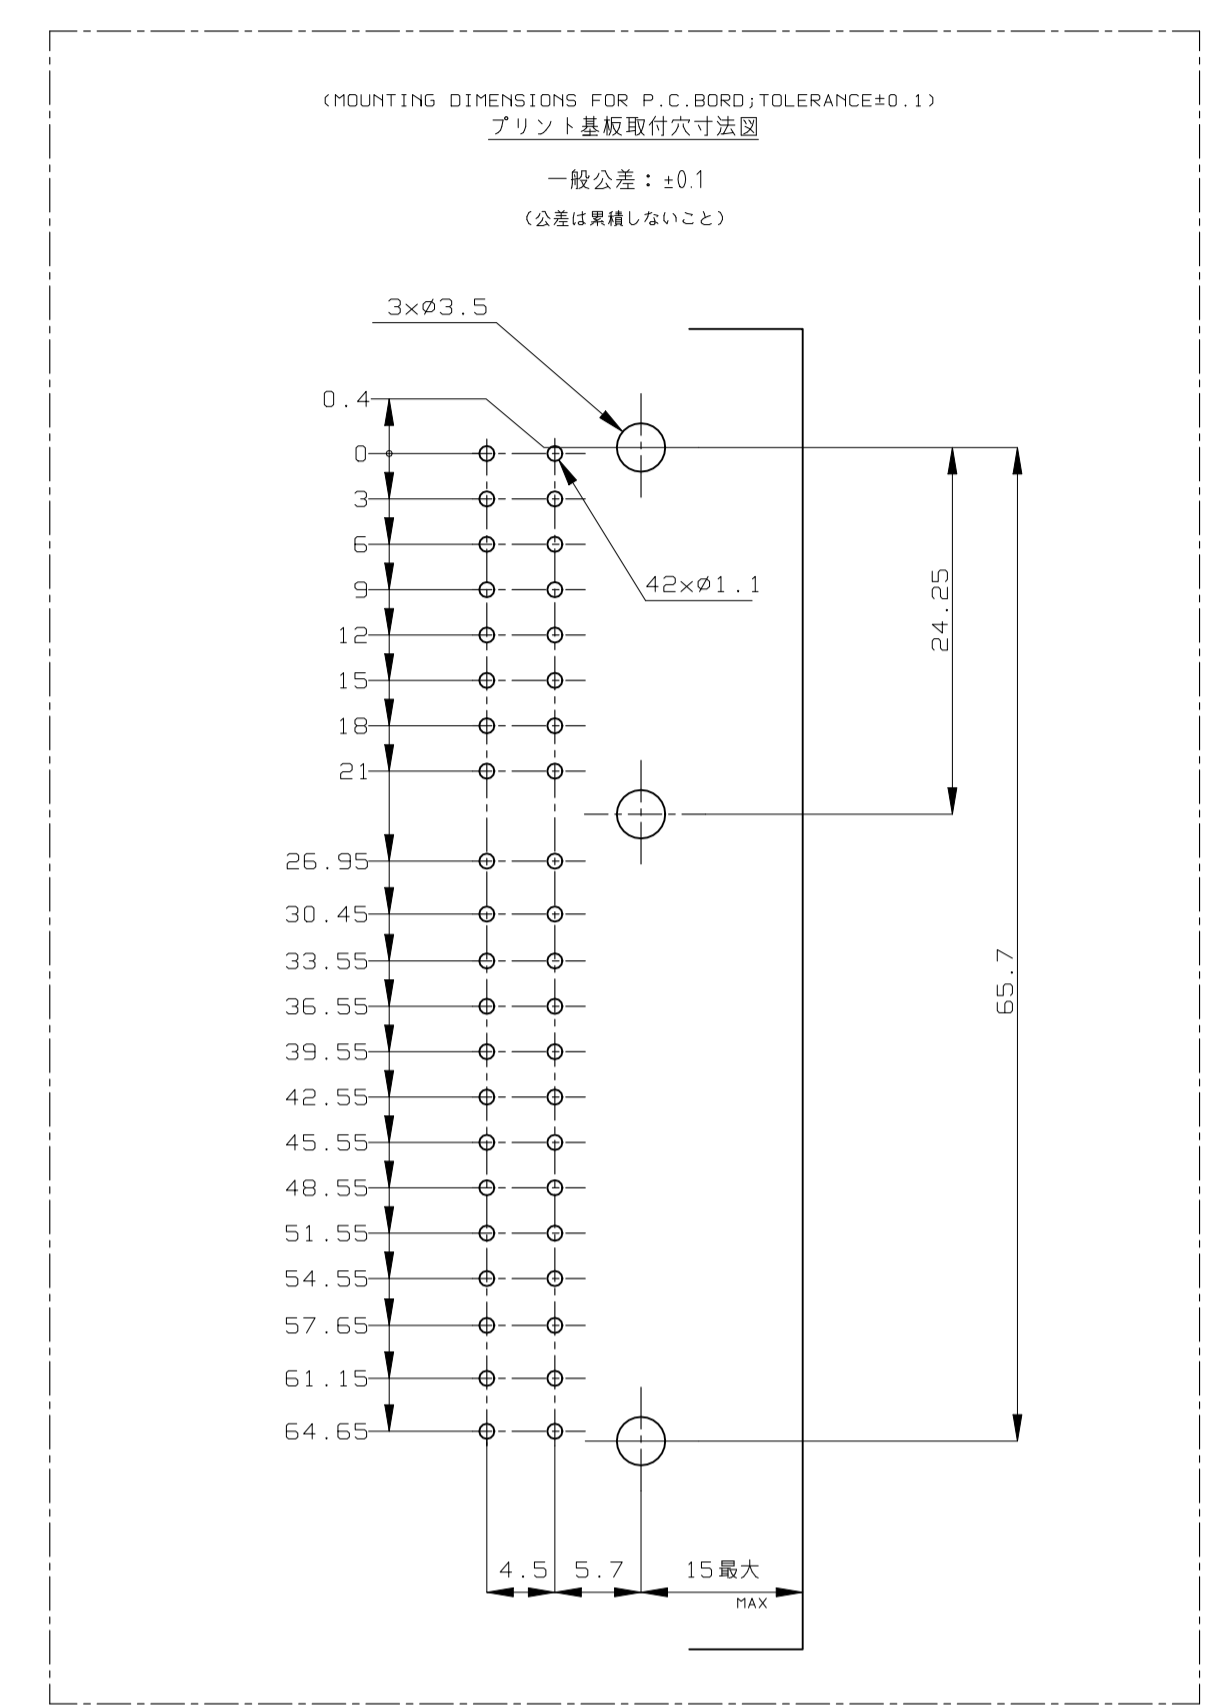



REVISIONS					
REV	DATE	DESCRIPTION	BY	CHK	APPV
N10	07JAN2019	REVISIED PER ECR-18-015766	TS	YN	
N11	29NOV2022	REVISIED PER ECR-22-154022	RK	MT	

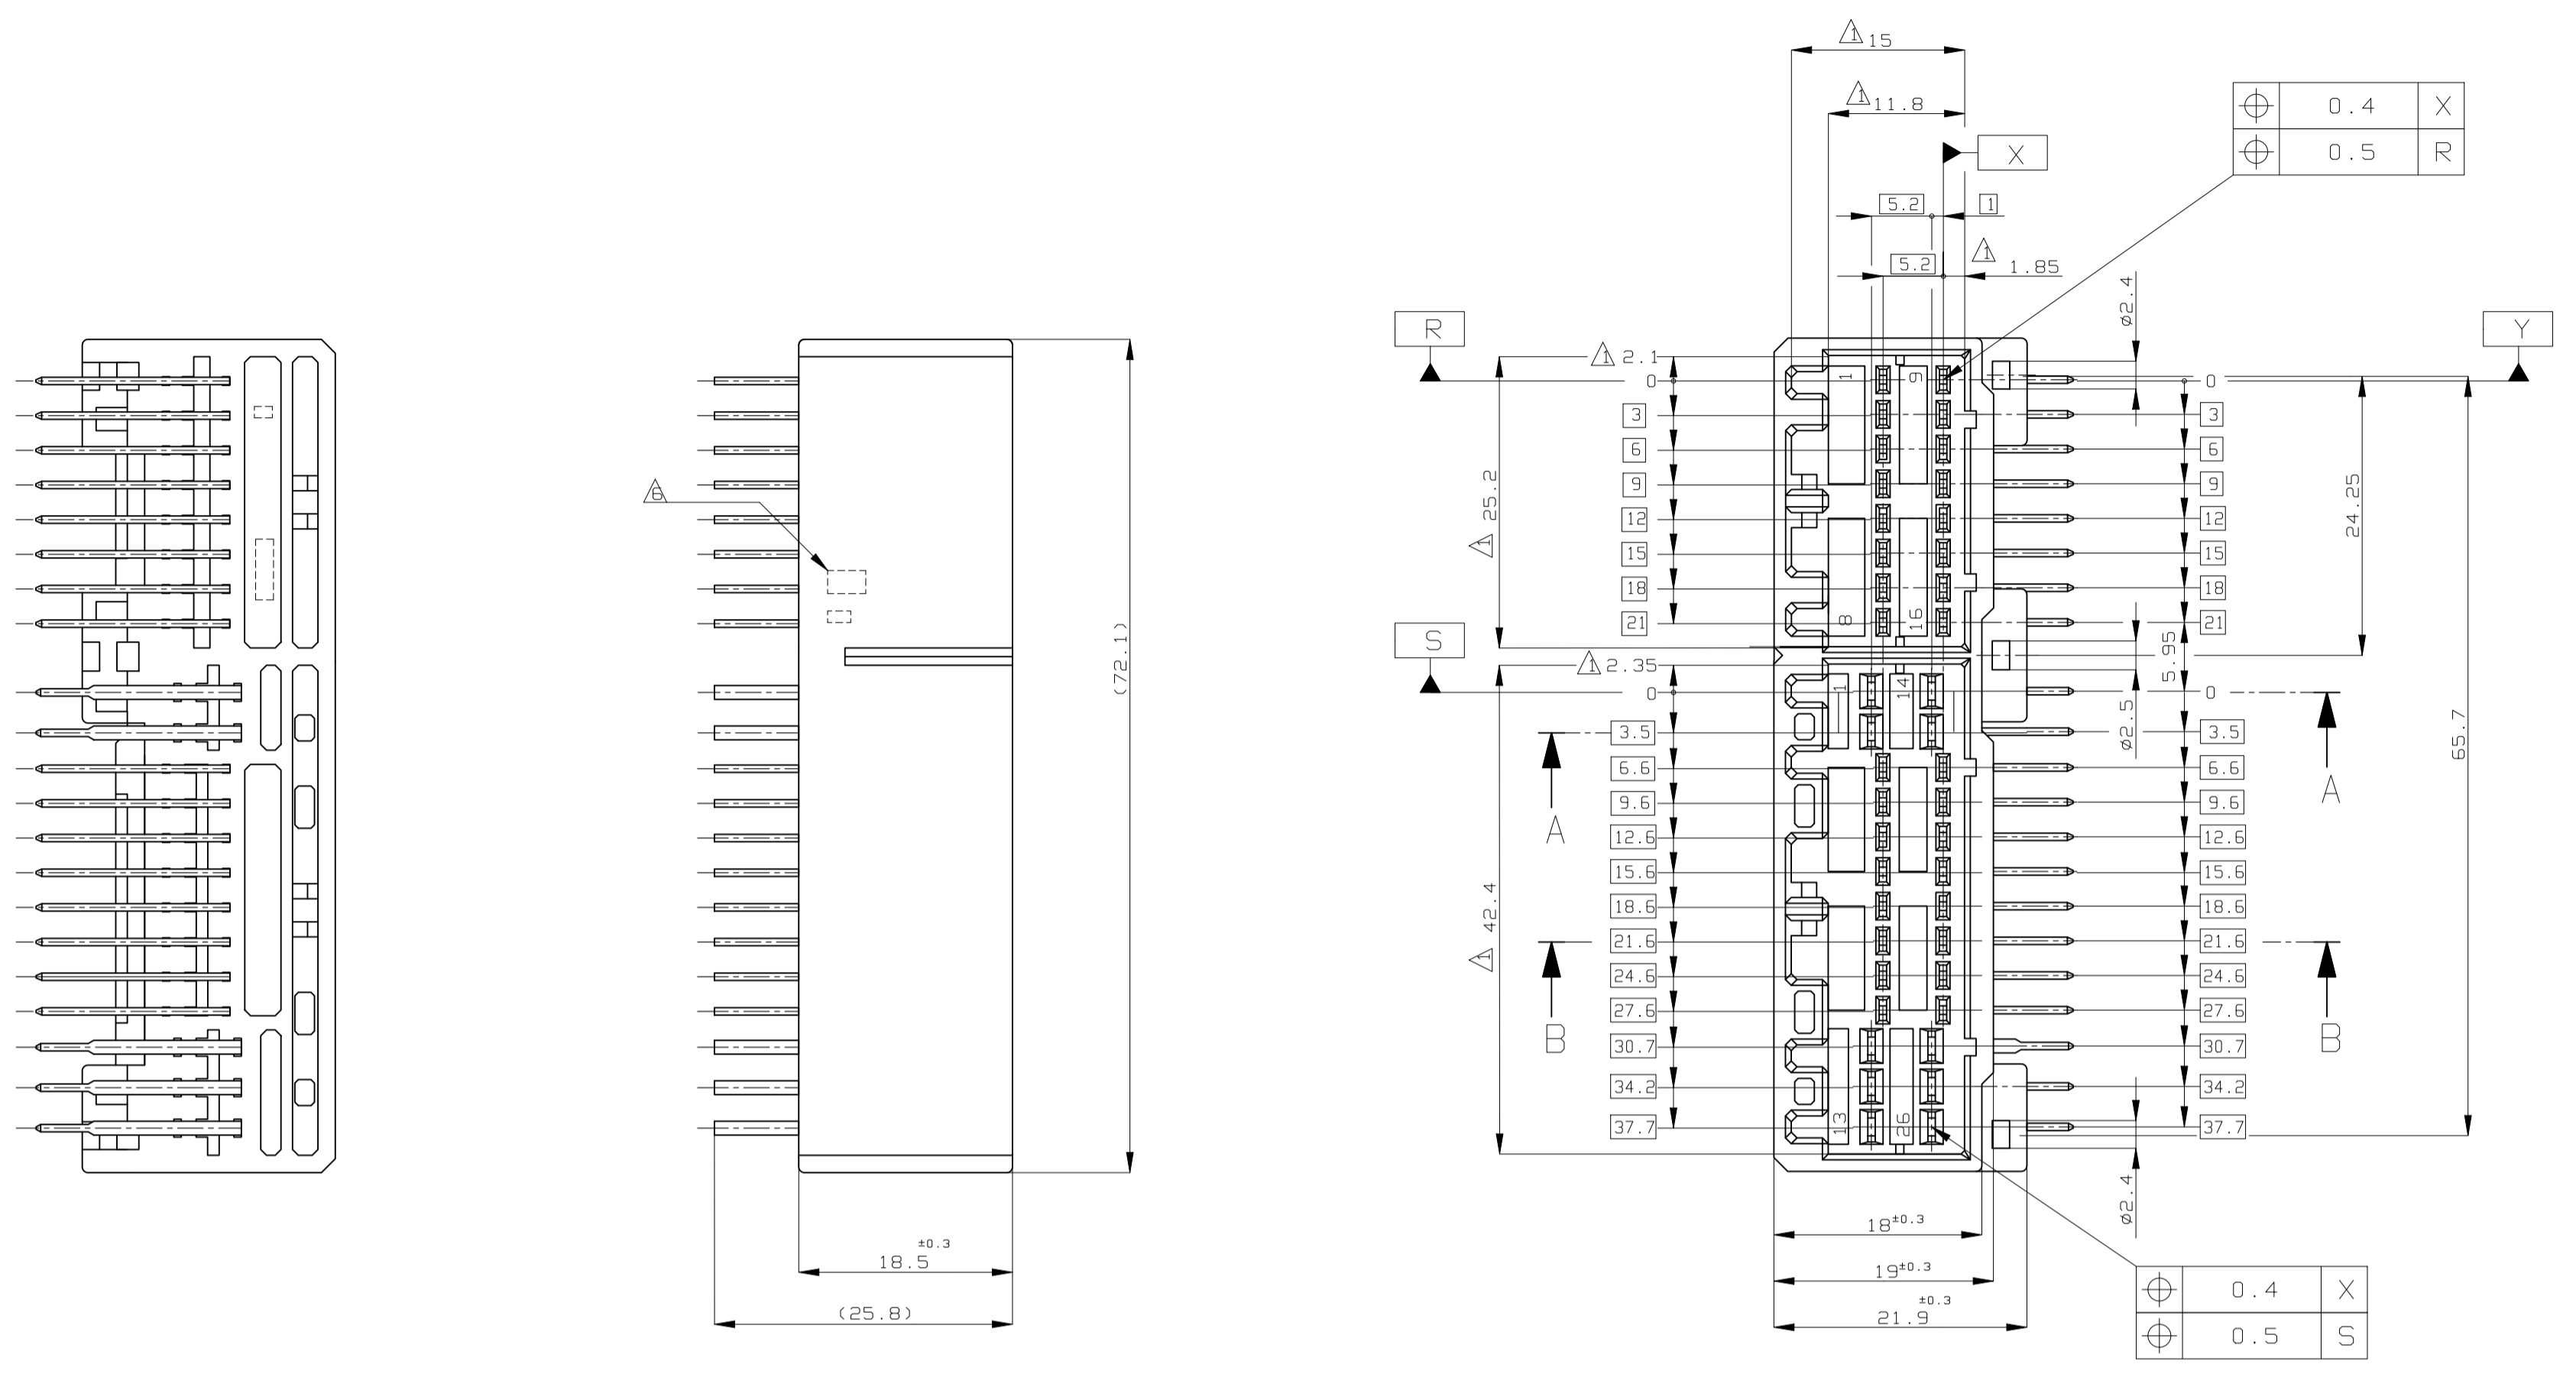

- △ □ 面から2mmの範囲で測定
- 2 嵌合相手ハブジャック型 174514, 174516, 917981, 917992
- 3 推奨取付ねじ: JIS B1115, B1122 タッピングねじ, なべ2種  
呼び径3, 長さ6mm以下 (締付けトルク: 0.4N-m (4kg-cm) 以下)
- 4 適用製品規格番号: 108-5280, 5342

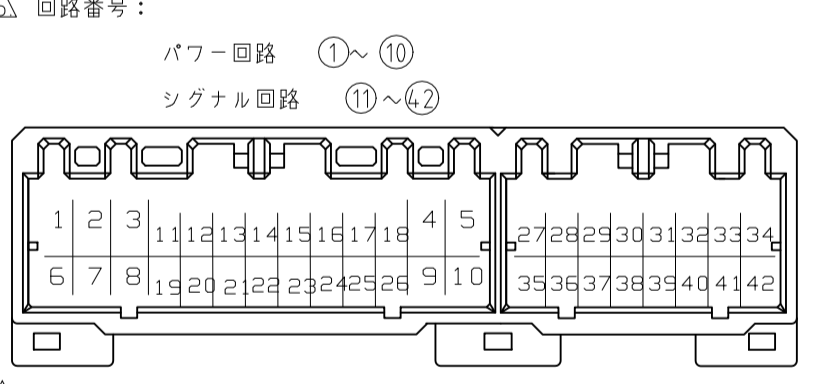

- △ MUST BE KEPT BETWEEN □ Z AND 2
- 2 THE MATING PLUG HSG. PART NUMBER; 174514, 174516, 917981, 917992
- 3 RECOMMENDED MOUNTING SCREW; 3mm DIA, 6mm LENGTH (MAX.)  
PAN HEAD, CLASS 2 TAPPING SCREW SPECIFIED IN JIS B1115, B1122  
(TIGHTENING TORQUE: 0.4N-m (4kg-cm) MAX.)
- 4 APPLICABLE PRODUCT SPEC NO; 108-5280, 108-5342
- △ CIRCUIT NUMBER  
POWER CIRCUIT NO. ①~⑩  
SIGNAL CIRCUIT NO. ⑪~④②
- △ MARKING FOR DISCERNMENT OF THE CONTACT FINISH

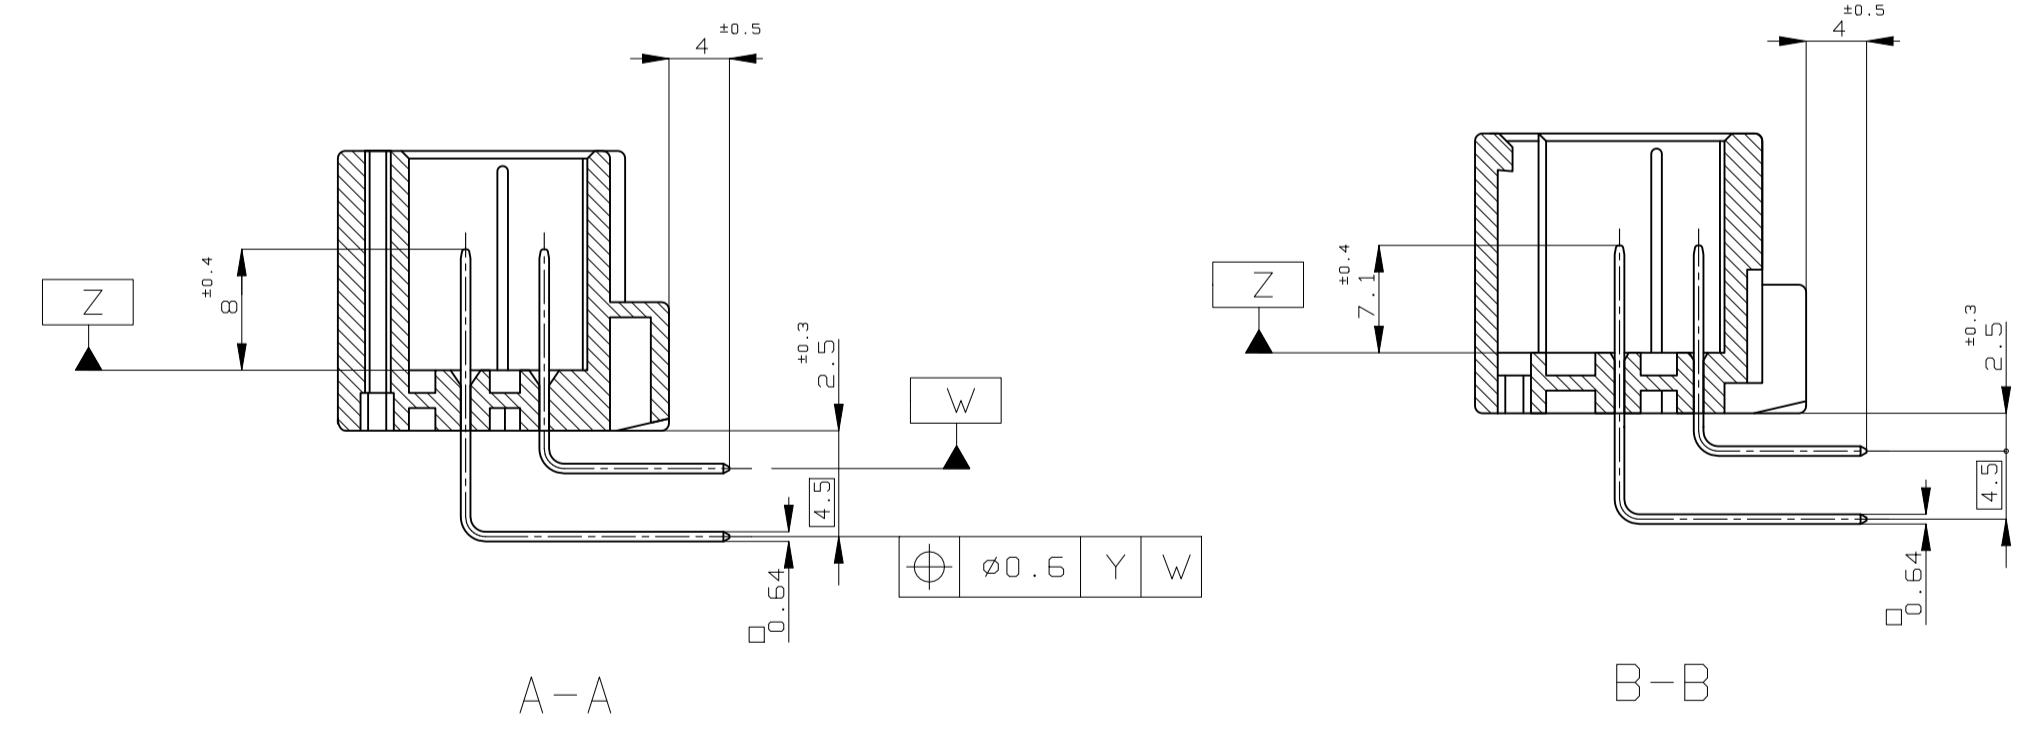

REV	DESCRIPTION	FINISH	PLATING	MARKING	COLOR	PART NO
OBSOLETE	54	SELECTIVE-TIN (MATTE)	SELECTIVE GOLD × 11	①②	GRAY	4-5175446-6
OBSOLETE	59	PRE-TINNED × 31 SELECTIVE-TIN (MATTE)	SELECTIVE GOLD × 2	⑬	GRAY	9-5175446-6
	58	PRE-TINNED × 40 SELECTIVE-TIN (MATTE)	SELECTIVE GOLD × 16	⑬	GRAY	8-5175446-6
	58	PRE-TINNED × 26 SELECTIVE-TIN (MATTE)	SELECTIVE GOLD × 16	⑬	NATURAL	8-5175446-1
OBSOLETE	56	PRE-TINNED × 25 SELECTIVE-TIN (MATTE)	SELECTIVE GOLD × 17	⑬	NATURAL	6-5175446-1
	54	PRE-TINNED × 34 SELECTIVE-TIN (MATTE)	SELECTIVE GOLD × 8	⑬	NATURAL	4-5175446-1
OBSOLETE	53	PRE-TINNED × 36 SELECTIVE-TIN (MATTE)	SELECTIVE GOLD × 6	⑬	GRAY	3-5175446-6
OBSOLETE	53	PRE-TINNED × 34 SELECTIVE-TIN (MATTE)	SELECTIVE GOLD × 8	⑬	NATURAL	3-5175446-1
	52	PRE-TINNED × 10 SELECTIVE-TIN (MATTE)	SELECTIVE GOLD × 32	⑬	GRAY	2-5175446-6
OBSOLETE	52	PRE-TINNED × 10 SELECTIVE-TIN (MATTE)	SELECTIVE GOLD × 32	⑬	NATURAL	2-5175446-1
OBSOLETE	55	PRE-TINNED × 10 SELECTIVE-TIN (MATTE)	SELECTIVE GOLD × 12	⑬	NATURAL	5-5175446-1
	9	PRE-TINNED × 40 TIN-LEAD	SELECTIVE GOLD × 2	⑬	GRAY	9-175446-5
OBSOLETE	8	PRE-TINNED × 26 TIN-LEAD	SELECTIVE GOLD × 16	⑬	GRAY	8-175446-5
OBSOLETE	8	PRE-TINNED × 26 TIN-LEAD	SELECTIVE GOLD × 16	⑬	BLACK	8-175446-2
OBSOLETE	8	PRE-TINNED × 26 TIN-LEAD	SELECTIVE GOLD × 16	⑬	NATURAL	8-175446-1
OBSOLETE	7	PRE-TINNED × 39 TIN-LEAD	SELECTIVE GOLD × 3	⑬	GRAY	7-175446-5
	6	PRE-TINNED × 25 TIN-LEAD	SELECTIVE GOLD × 17	⑬	NATURAL	6-175446-1
	5	PRE-TINNED × 30 TIN-LEAD	SELECTIVE GOLD × 12	⑬	NATURAL	5-175446-1
	4	PRE-TINNED × 31 TIN-LEAD	SELECTIVE GOLD × 11	⑬	GRAY	4-175446-5
OBSOLETE	4	PRE-TINNED × 34 TIN-LEAD	SELECTIVE GOLD × 8	⑬	NATURAL	4-175446-1
OBSOLETE	3	PRE-TINNED × 36 TIN-LEAD	SELECTIVE GOLD × 6	⑬	GRAY	3-175446-6
	3	PRE-TINNED × 34 TIN-LEAD	SELECTIVE GOLD × 8	⑬	NATURAL	3-175446-1
	2	PRE-TINNED × 10 TIN-LEAD	SELECTIVE GOLD × 32	⑬	GRAY	2-175446-6
	0	PRE-TINNED 銅めっき × 42		⑬	GRAY	175446-5
	1	PRE-TINNED 銅めっき × 42	SELECTIVE-TIN (銅めっき) × 42	⑬	NATURAL	175446-2
	0	PRE-TINNED 銅めっき × 42		⑬	NATURAL	175446-1

GENERAL TOLERANCE	SIZE	TOLERANCE
0 < L ≤ 10	±0.2	
10 < L ≤ 30	±0.25	
30 < L ≤ 100	±0.3	
ANGLES	±3°	

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIN M. KADOSAKI 17MAY05  
CHK T. SHINOHARA 17MAY05  
APVD K. BETSUJI 17MAY05

TE Connectivity

42POSITION CAP HOUSING ASSY  
040/070 SERIES HYBRID I/O CONNECTOR

WEIGHT 21.3 g  
SIZE A1  
CAGE CODE 00779  
DRAWING NO. 175446

CUSTOMER DRAWING

SCALE 2:1 SHEET 1 of 1 REV. N11