

STEVAL-IFP010V1

Demonstration board for the VNI2140J dual high-side, solid-state smart power relay

Data Brief

Features

- Output current: 1 A per channel
- Shorted load protection
- Junction over-temperature protection
- Case over-temperature protection for thermal independence of the channels
- Non-simultaneous TCSD (thermal case shutdown) restart for the various channels
- Protection against loss of ground
- Current limitation
- Under-voltage shutdown
- Open load in OFF state and short to V_{CC} detection
- Open drain diagnostic outputs
- 3.3 V CMOS/TTL compatible inputs
- Fast demagnetization of inductive loads
- Conforms to IEC 61131-2 supply voltage: +4 V to +36 V

Description

This demonstration board is based on the VNI2140J, a monolithic device designed using ST's VIPower technology for driving two independent resistive or inductive loads with one side connected to ground. Active current limitation prevents the dropping of system power supply in case of a shorted load. Built-in thermal shutdown protects the chip from over-temperature and short-circuit. In overload condition, channel turns OFF and back ON automatically in order to maintain the junction temperature between TTSD and TR. If this condition causes case temperature to reach TCSD, the overloaded channel is turned OFF and will restart only when case temperature has decreased down to TCR.




In cases where more than one channel is in overload, the TCSD restart will not be simultaneous, in order to prevent high peak current from the supply. Non overloaded channels continue to operate normally. The open drain diagnostics output indicates over-temperature.

Board schematic STEVAL-IFP010V1

Board schematic 1


Figure 1. Schematic diagram

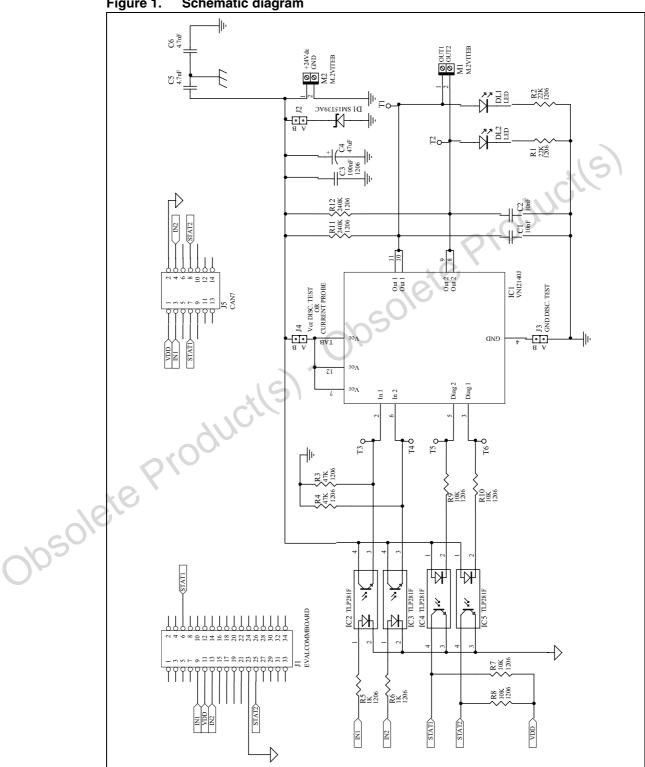

STEVAL-IFP010V1 Board layout

2 Board layout

Figure 2. Top overlay⁽¹⁾

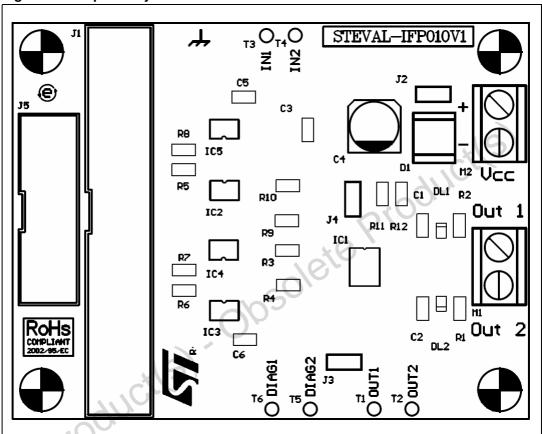

1. Drawing not to scale

577

Bill of materials STEVAL-IFP010V1

3 Bill of materials

Table 1. BOM list

	Designator	Part type	Description
	C1	10 nF	SMD capacitor
	C2	10 nF	SMD capacitor
	C3	100 nF	SMD capacitor
	C4	47 μF	SMD capacitor
	C5	4.7 nF	SMD capacitor
	C6	4.7 nF	SMD capacitor
	D1	SM15T39AC	ST Transil diode
	DL1	LED	SMD LED diode
	DL2	LED	SMD LED diode
	IC1	VNI2140J	ST HSD IC
0105018	IC2	TLP281F	Optocoupler
	IC3	TLP281F	Optocoupler
	IC4	TLP281F	Optocoupler
	IC5	TLP281F	Optocoupler
	J1	EVALCOMMBOARD	34.P plug
	J3	GND disc. test	Jumper
	J4	V _{CC} disc. test	Jumper
	J5	CAN7	14.P plug
	M1		2-screw connector
	M2		2-screw connector
	R1	22 kΩ	R-1206 SMD resistor
G0"	R10	10 kΩ	R-1206 SMD resistor
102	R11	240 kΩ	R-1206 SMD resistor
<i>J</i> .	R12	240 kΩ	R-1206 SMD resistor
	R2	22 kΩ	R-1206 SMD resistor
	R3	47 kΩ	R-1206 SMD resistor
	R4	47 kΩ	R-1206 SMD resistor
	R5	1 kΩ	R-1206 SMD resistor
	R6	1 kΩ	R-1206 SMD resistor
	R7	10 kΩ	R-1206 SMD resistor
	R8	10 kΩ	R-1206 SMD resistor
	R9	10 kΩ	R-1206 SMD resistor

STEVAL-IFP010V1 Revision history

4 Revision history

Table 2. Document revision history

Date	Revision	Changes
13-Jun-2008	1	Initial release

Obsolete Product(s). Obsolete Product(s)

5/6

Please Read Carefully:

Information in this document is provided solely in connection with ST products. STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, modifications or improvements, to this document, and the products and services described herein at any time, without notice.

All ST products are sold pursuant to ST's terms and conditions of sale.

Purchasers are solely responsible for the choice, selection and use of the ST products and services described herein, and ST assumes no liability whatsoever relating to the choice, selection or use of the ST products and services described herein.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted under this document. If any part of this document refers to any third party products or services it shall not be deemed a license grant by ST for the use of such third party products or services, or any intellectual property contained therein or considered as a warranty covering the use in any manner whatsoever of such third party products or services or any intellectual property contained therein.

UNLESS OTHERWISE SET FORTH IN ST'S TERMS AND CONDITIONS OF SALE ST DISCLAIMS ANY EXPRESS OR IMPLIED WARRANTY WITH RESPECT TO THE USE AND/OR SALE OF ST PRODUCTS INCLUDING WITHOUT LIMITATION IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION), OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT.

UNLESS EXPRESSLY APPROVED IN WRITING BY AN AUTHORIZED ST REPRESENTATIVE, ST PRODUCTS ARE NOT RECOMMENDED, AUTHORIZED OR WARRANTED FOR USE IN MILITARY, AIR CRAFT, SPACE, LIFE SAVING, OR LIFE SUSTAINING APPLICATIONS, NOR IN PRODUCTS OR SYSTEMS WHERE FAILURE OR MALFUNCTION MAY RESULT IN PERSONAL INJURY, DEATH, OR SEVERE PROPERTY OR ENVIRONMENTAL DAMAGE. ST PRODUCTS WHICH ARE NOT SPECIFIED AS "AUTOMOTIVE GRADE" MAY ONLY BE USED IN AUTOMOTIVE APPLICATIONS AT USER'S OWN RISK.

Resale of ST products with provisions different from the statements and/or technical features set forth in this document shall immediately void any warranty granted by ST for the ST product or service described herein and shall not create or extend in any manner whatsoever, any liability of ST.

ST and the ST logo are trademarks or registered trademarks of ST in various countries.

Information in this document supersedes and replaces all information previously supplied.

The ST logo is a registered trademark of STMicroelectronics. All other names are the property of their respective owners.

© 2008 STMicroelectronics - All rights reserved

STMicroelectronics group of companies

Australia - Belgium - Brazil - Canada - China - Czech Republic - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan - Malaysia - Malta - Morocco - Singapore - Spain - Sweden - Switzerland - United Kingdom - United States of America

www.st.com

577