

FEATURES

- Low noise figure: 1.8 dB
- P1dB output power: 14.5 dBm
- P_{SAT} output power: 17.5 dBm
- High gain: 15 dB
- Output IP3: 29 dBm
- Supply voltage: V_{DD} = 7 V at 70 mA
- 50 Ω matched input/output (I/O)
- 32-lead 5 mm × 5 mm SMT package: 25mm²

APPLICATIONS

- Test instrumentation
- High linearity microwave radios
- VSAT and SATCOM
- Military and space

GENERAL DESCRIPTION

The [HMC1049](#) is a GaAs MMIC low noise amplifier that operates between 0.3 GHz and 20 GHz. This LNA provides 15 dB of small signal gain, 1.8 dB noise figure, and an IP3 output of 29 dBm, yet requires only 70 mA from a 7 V supply. The P1dB output power of 14.5 dBm enables the LNA to function as a local oscillator (LO) driver for balanced, I/Q, or

FUNCTIONAL BLOCK DIAGRAM

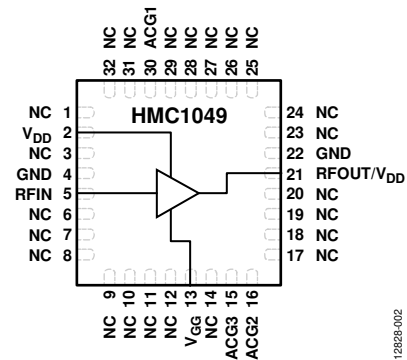


Figure 1.

12828-002

image rejection mixers. V_{DD} can also be applied to Pin 21; however, Pin 21 requires a bias tee with V_{DD} = 4 V. The [HMC1049](#) amplifier I/Os are internally matched to 50 Ω and the device is supplied in a compact, leadless, QFN 5 mm × 5 mm surface-mount package.

TABLE OF CONTENTS

Features	1	Pin Configuration and Function Descriptions.....	5
Applications.....	1	Interface Schematics	6
Functional Block Diagram	1	Typical Performance Characteristics	7
General Description	1	Evaluation Printed Circuit Board.....	12
Revision History	2	Packaging and Ordering Information	14
Specifications.....	3	Outline Dimensions	14
Absolute Maximum Ratings	4	Ordering Guide	14
ESD Caution.....	4		

REVISION HISTORY

11/14—Rev. 01.1213 to Rev. A

This Hittite Microwave Products data sheet has been reformatted to meet the styles and standards of Analog Devices, Inc.

Updated Format.....	Universal
Changes to General Description	1
Change to Table 2, Thermal Resistance Parameter Column	4
Added Figure 2.....	5
Changes to Table 4.....	5
Moved Figure 3 to Figure 9 to Interface Schematics Section.....	6
Change to Figure 8 and Figure 9.....	6
Changes to Figure 36.....	13
Added Ordering Guide Section	15

SPECIFICATIONS

$T_A = 25^\circ\text{C}$, $V_{DD} = 7\text{ V}$, $I_{DD} = 70\text{ mA}$ ¹.

Table 1.

Parameter	Min	Typ	Max	Min	Typ	Max	Min	Typ	Max	Unit
FREQUENCY RANGE	0.3		1	1		14	14		20	GHz
GAIN	13.5	16.5		12	15		10	13		dB
Gain Variation Over Temperature		0.006			0.019			0.017		dB/°C
NOISE FIGURE		2.5	3.5		1.8	2.5		2.7	4.0	dB
RETURN LOSS										
Input		15			13			14		dB
Output		8			15			13		dB
OUTPUT										
Output Power for 1 dB Compression (P1dB)		15			14.5			13		dBm
Saturated (P_{SAT})		18			17.5			16		dBm
Output Third-Order Intercept (IP3) ²		31			29			26		dBm
TOTAL SUPPLY CURRENT		70			70			70		mA

¹ Adjust V_{GG} between -2 V to 0 V to achieve $I_{DD} = 70\text{ mA}$ typical.

² Measurement taken at $P_{OUT}/\text{tone} = 8\text{ dBm}$.

ABSOLUTE MAXIMUM RATINGS

Table 2.

Parameter	Rating
Drain Bias Voltage (V_{DD})	10 V
Drain Bias Voltage (RF Out/ V_{DD})	7 V
RF Input Power	18 dBm
Gate Bias Voltage, V_{GG}	-2 V to +0.2 V
Channel Temperature	175°C
Continuous P_{DISS} ($T = 85^{\circ}\text{C}$) (Derate 37.1 mW/ $^{\circ}\text{C}$ Above 85°C)	3.34 W
Thermal Resistance (Channel to Ground Paddle)	26.9°C/W
Temperature	
Storage Temperature	-65°C to +150°C
Operating Temperature	-40°C to +85°C
ESD Sensitivity (HBM)	Class 1A

Stresses at or above those listed under Absolute Maximum Ratings may cause permanent damage to the product. This is a stress rating only; functional operation of the product at these or any other conditions above those indicated in the operational section of this specification is not implied. Operation beyond the maximum operating conditions for extended periods may affect product reliability.

Table 3. Typical Supply Current vs. V_{DD}


V_{DD} (V)	I_{DD}^1 (mA)
5	70
6	70
7	70

¹ Adjust V_{GG} to achieve $I_{DD} = 70$ mA.

ESD CAUTION

ESD (electrostatic discharge) sensitive device. Charged devices and circuit boards can discharge without detection. Although this product features patented or proprietary protection circuitry, damage may occur on devices subjected to high energy ESD. Therefore, proper ESD precautions should be taken to avoid performance degradation or loss of functionality.

PIN CONFIGURATION AND FUNCTION DESCRIPTIONS

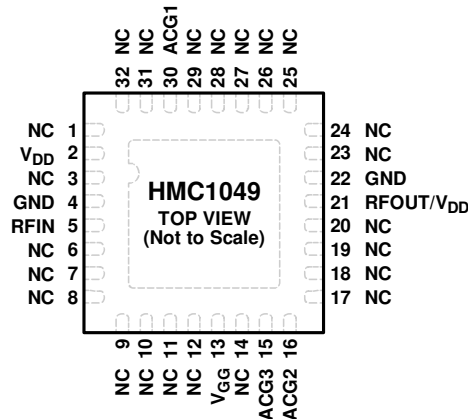

NOTES

1. NC = NO CONNECT. THESE PINS ARE NOT CONNECTED INTERNALLY; HOWEVER, ALL DATA WAS MEASURED WITH THESE PINS CONNECTED TO RF/DC GROUND EXTERNALLY.
2. EXPOSED PAD. THE EXPOSED GROUND PADDLE MUST BE CONNECTED TO RF/DC GROUND.

12828-004

Figure 2. Pin Configuration Diagram

Table 4. Pin Function Descriptions

Pin No.	Mnemonic	Description ¹
1, 3, 6 to 12, 14, 17 to 20, 23 to 29, 31, 32	NC	No Connect. These pins are not connected internally; however, all data was measured with these pins connected to RF/dc ground externally (see the Typical Performance Characteristics section for data plots).
5	RFIN	RF Input. This pin is dc-coupled and matched to 50 Ω.
2	V _{DD}	Power Supply Voltage for the Amplifier. External bypass capacitors (100 pF and 0.01 μF) are required.
30	ACG1	Low Frequency Termination. An external bypass capacitor of 100 pF is required.
21	RFOUT/V _{DD}	RF Output/Alternate Power Supply Voltage for the Amplifier. An external bias tee is required when used as alternative V _{DD} . This pin is dc-coupled and matched to 50 Ω.
15, 16	ACG2, ACG3	Low Frequency Termination. External bypass capacitors of 100 pF are required.
13	V _{GG}	Gate Control for Amplifier. Adjust the voltage to achieve I _{DD} = 70 mA. External bypass capacitors of 100 pF, 0.01 μF, and 4.7μF are required.
4, 22	GND	Ground. Connect Pin 4 and Pin 22 to RF/dc ground.
0	EP	Exposed Pad. The exposed ground paddle must be connected to RF/dc ground.

¹ See the Interface Schematics section for pin interfaces.

INTERFACE SCHEMATICS




Figure 3. V_{DD} Interface




Figure 4. GND Interface




Figure 5. RFIN Interface




Figure 6. V_{GG} Interface




Figure 7. ACG2 and ACG3 Interface




Figure 8. RFOUT/ V_{DD} Interface




Figure 9. ACG1 Interface

TYPICAL PERFORMANCE CHARACTERISTICS

Data taken with V_{DD} applied to Pin 2, $V_{DD} = 7$ V.

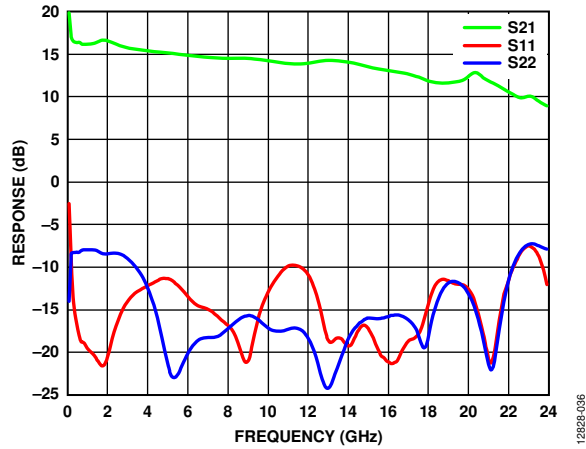


Figure 10. Broadband Gain and Return Loss

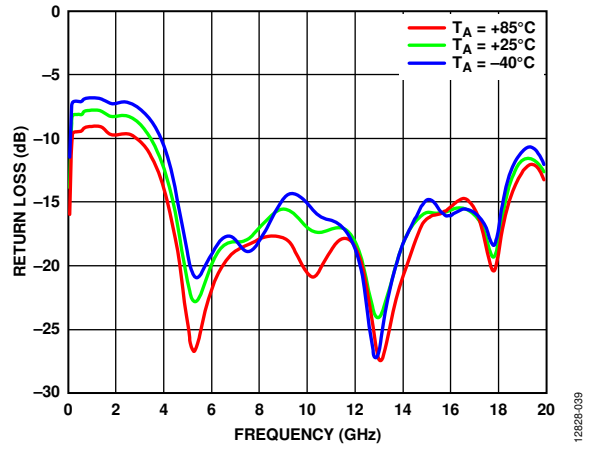


Figure 13. Output Return Loss vs. Temperature

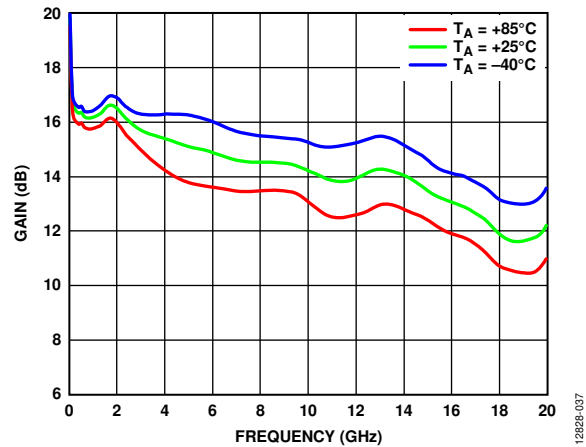


Figure 11. Gain vs. Temperature

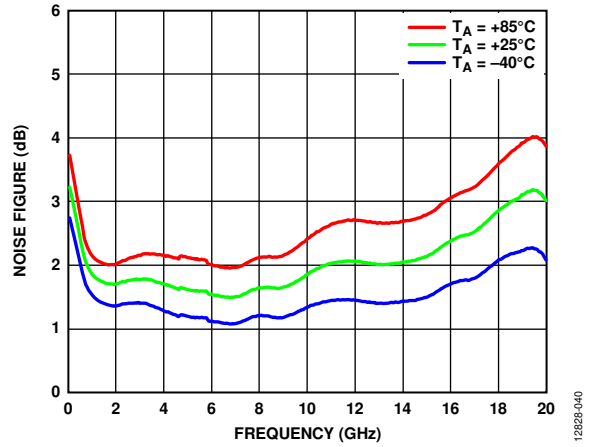


Figure 14. Noise Figure vs. Temperature

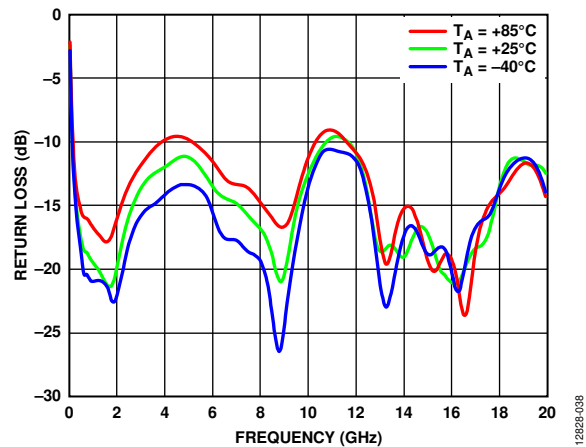


Figure 12. Input Return Loss vs. Temperature

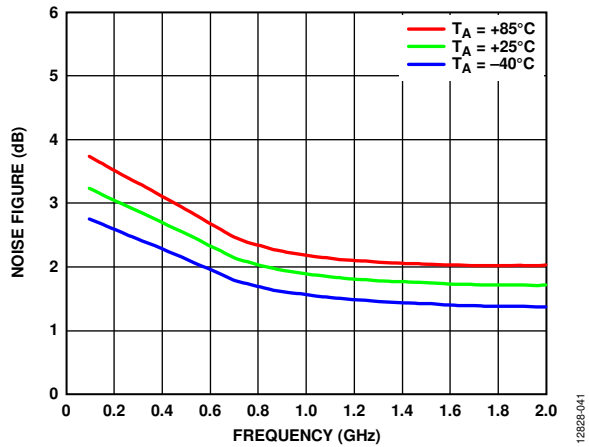


Figure 15. Noise Figure vs. Temperature, Low Frequency

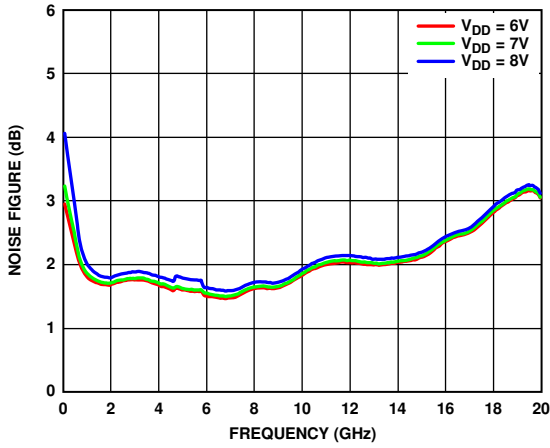


Figure 16. Noise Figure vs. V_{DD}

12828-042

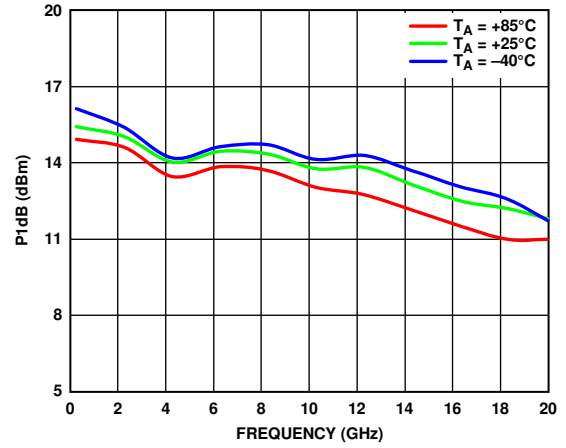


Figure 19. P1dB vs. Temperature

12828-045

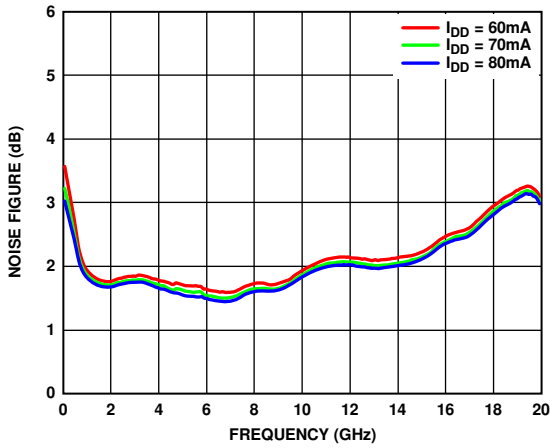


Figure 17. Noise Figure vs. I_{DD}

12828-043

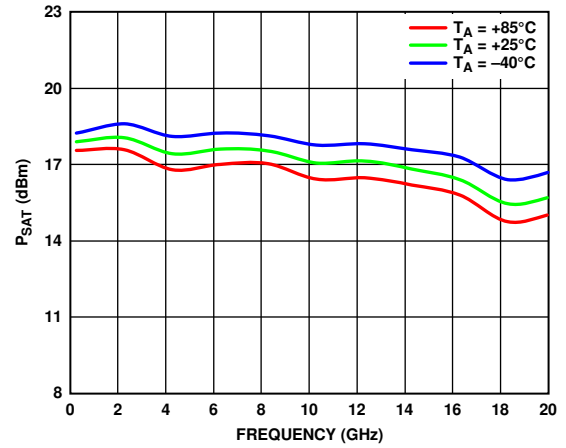


Figure 20. P_{SAT} vs. Temperature

12828-046

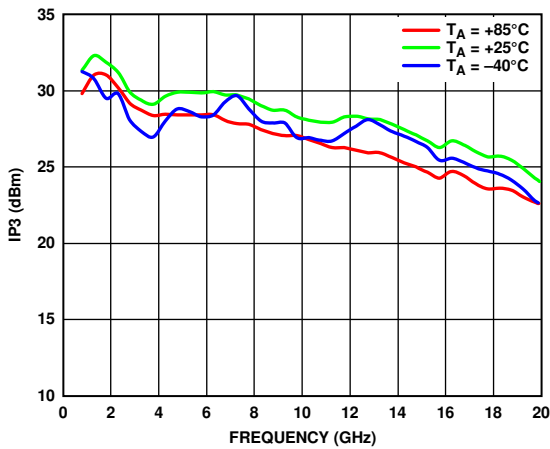


Figure 18. Output IP3 vs. Temperature

12828-044

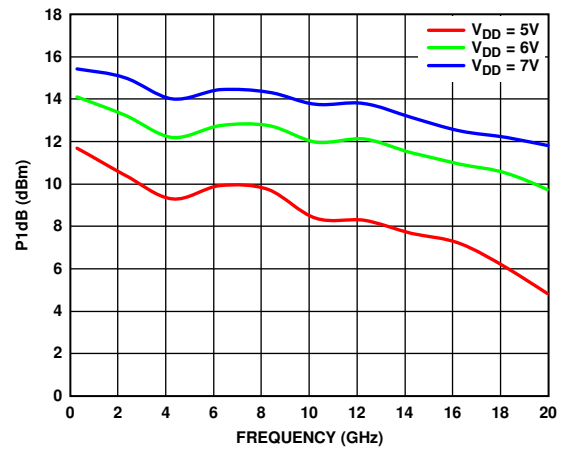


Figure 21. P1dB vs. V_{DD}

12828-047

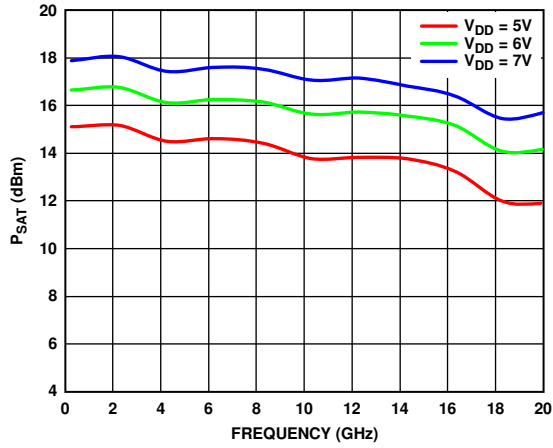


Figure 22. P_{SAT} vs. V_{DD}

12828-048

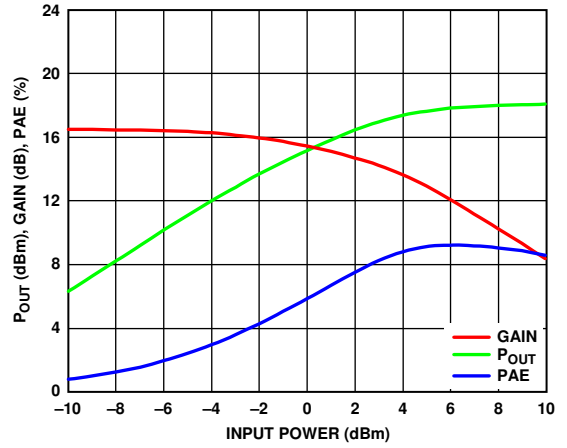


Figure 24. Power Compression @ 2 GHz

12828-050

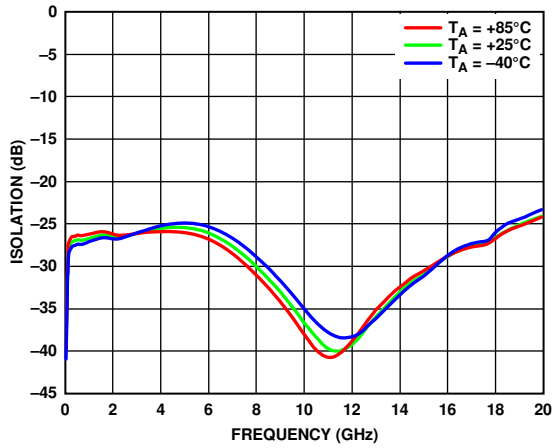


Figure 23. Reverse Isolation vs. Temperature

12828-049

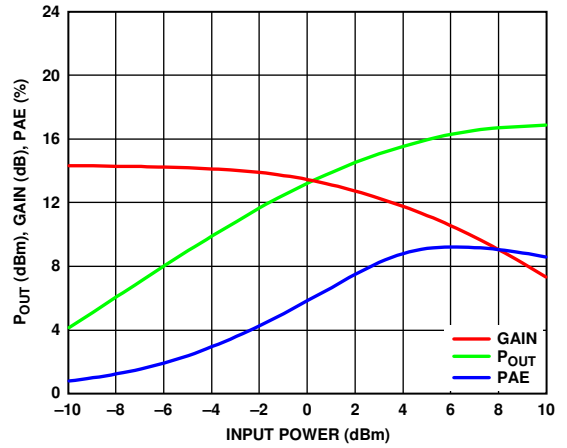


Figure 25. Power Compression @ 10 GHz

12828-051

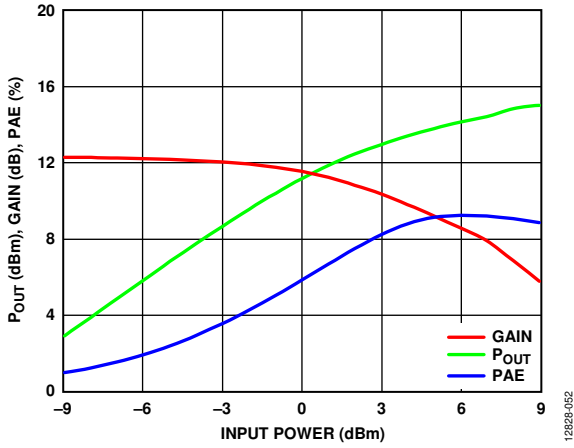


Figure 26. Power Compression @ 18 GHz

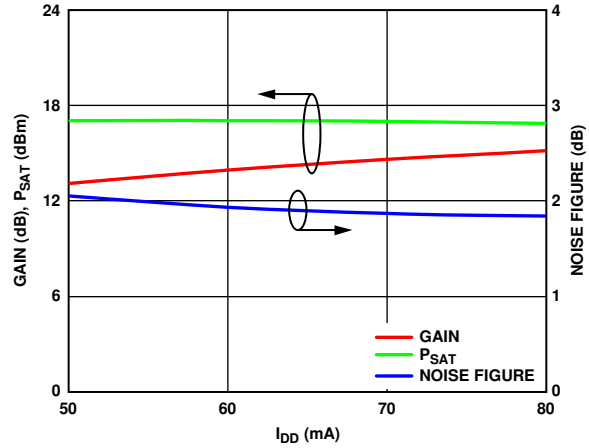


Figure 28. Noise Figure, Gain, and Power vs. Supply Current @ 10 GHz

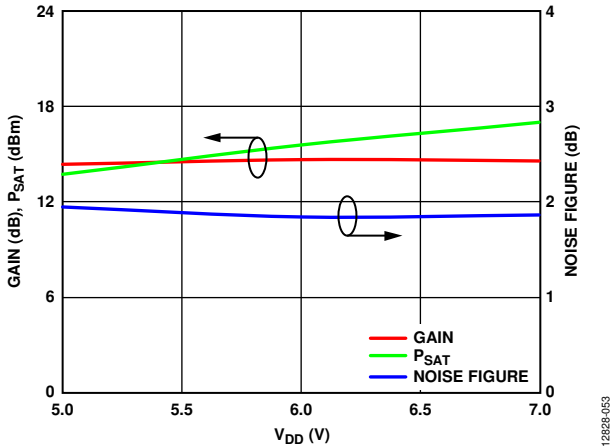


Figure 27. Noise Figure, Gain, and Power vs. Supply Voltage @ 10 GHz

Data taken with V_{DD} applied to the bias tee at Pin 21.

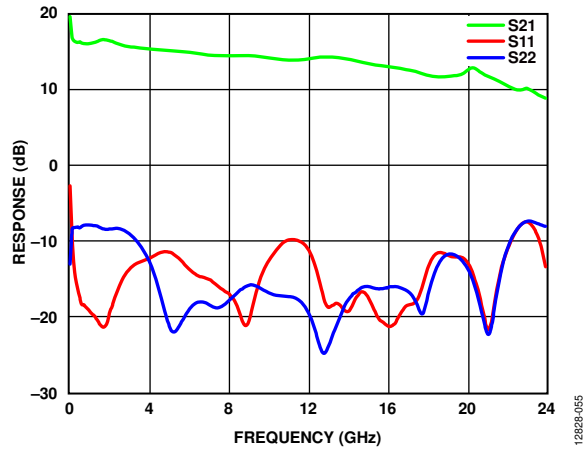


Figure 29. Broadband Gain and Return Loss, $V_{DD} = 4 V$, Supply to Bias Tee

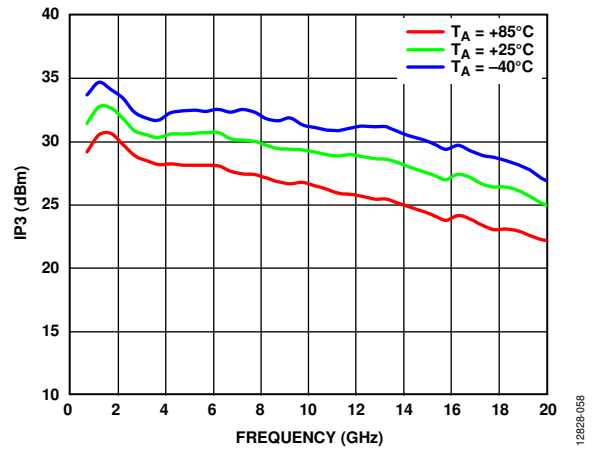


Figure 32. Output IP3 vs. Temperature, $V_{DD} = 4 V$, Supply to Bias Tee

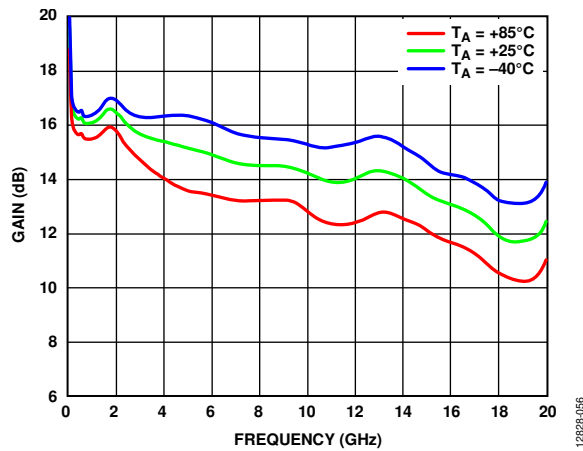


Figure 30. Gain vs. Temperature, $V_{DD} = 4 V$, Supply to Bias Tee

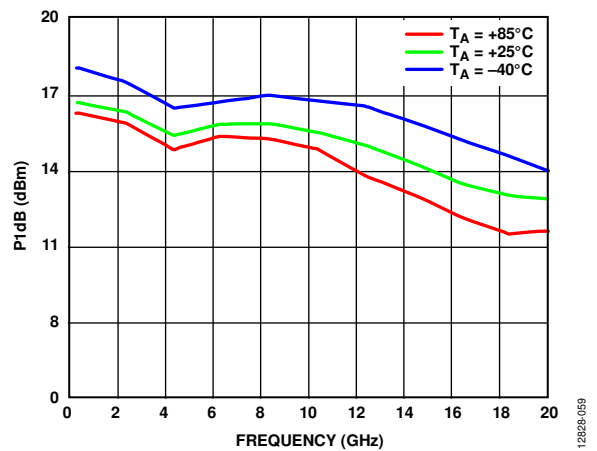


Figure 33. P1dB vs. Temperature, $V_{DD} = 4 V$, Supply to Bias Tee

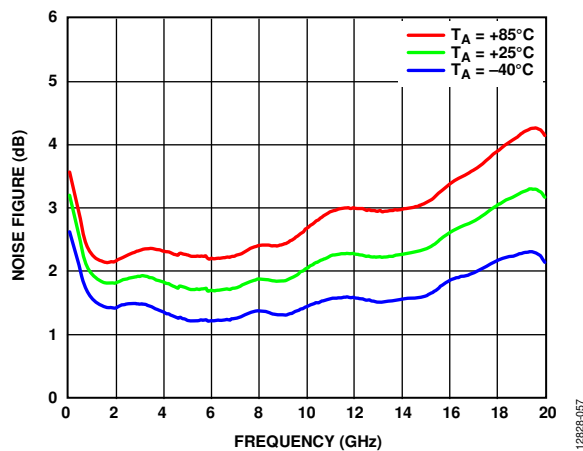


Figure 31. Noise Figure vs. Temperature, $V_{DD} = 4 V$, Supply to Bias Tee

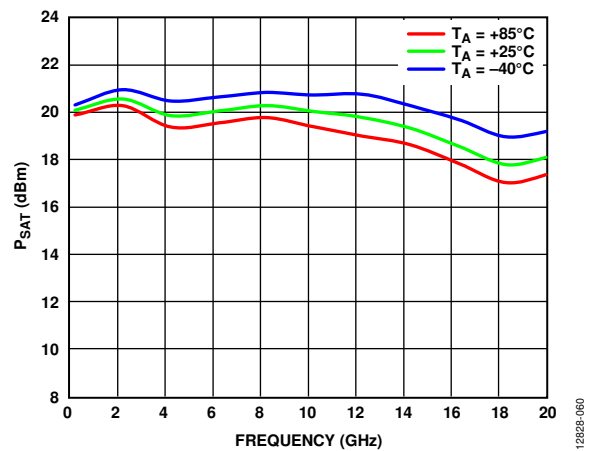


Figure 34. P_{SAT} vs. Temperature, $V_{DD} = 4 V$, Supply to Bias Tee

EVALUATION PRINTED CIRCUIT BOARD

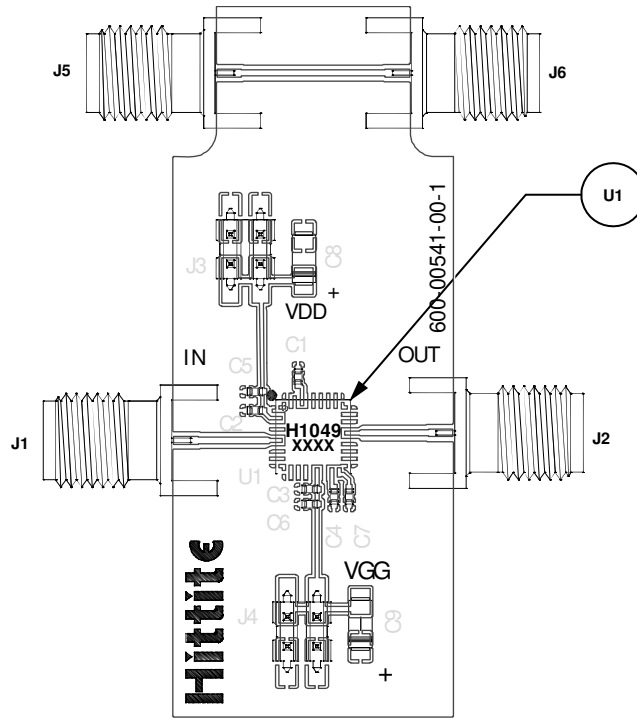


Figure 35. Evaluation Board Layout

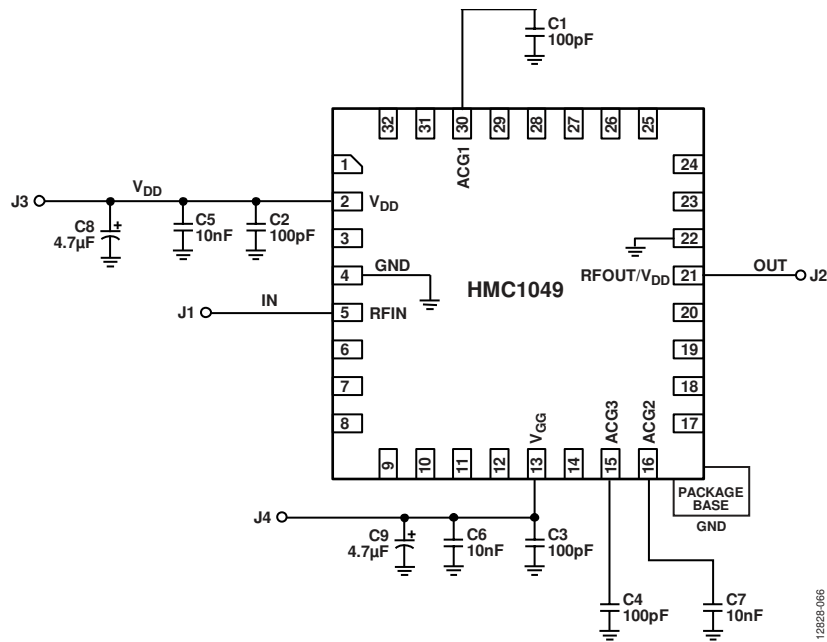


Figure 36. Evaluation Board Schematic

Table 5. List of Materials for Evaluation PCB

Item	Description
J1, J2, J5, J6	PCB mount SMA RF connector
J3, J4	DC pins
C1 to C4	100 pF capacitor, 0402 package
C5 to C7	10000 pF capacitor, 0402 package
C8, C9	4.7 μ F capacitor, tantalum
U1	HMC1049LP5E
PCB ¹	600-00541-00-1 evaluation PCB

¹ Circuit board material: Rogers 4350 or Arlon 25FR.

The circuit board used in the application should use RF circuit design techniques. Signal lines should have 50 Ω impedance; connect the package ground leads and exposed paddle directly to the ground plane. Use a sufficient number of via holes to connect the top and bottom ground planes. The evaluation circuit board shown is available from Analog Devices, Inc., upon request.

PACKAGING AND ORDERING INFORMATION

OUTLINE DIMENSIONS

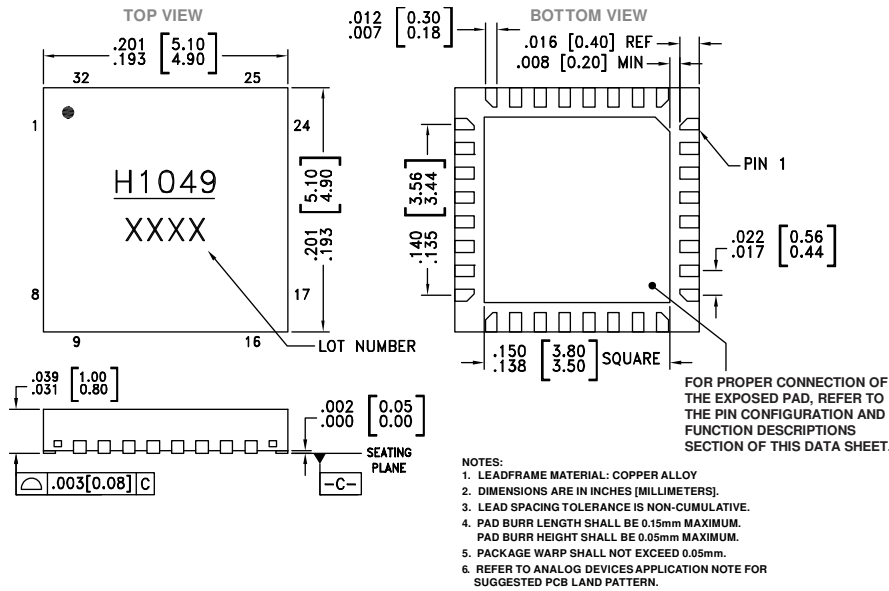


Figure 37. 32-Lead Quad Flat No-Lead Package [QFN]
5 mm x 5 mm Body, Very Thin Quad
Dimensions shown in inches and [millimeters]

ORDERING GUIDE

Model ¹	Temperature Range	Lead Finish	MSL Rating ²	Package Description	Qty.	Branding ³
HMC1049LP5E	-40°C to +85°C	100% matte Sn	MSL1	32-Lead QFN		H1049 XXXX
HMC1049LP5ETR	-40°C to +85°C	100% matte Sn	MSL1	32-Lead QFN, 7" Tape and Reel	500	H1049 XXXX
EVAL01-HMC1049LP5				Evaluation board		

¹ E = RoHS Compliant Part.

² MSL1 rating indicates a maximum peak reflow temperature of 260°C.

³ Four-digit lot number, XXXX.