


RB1881 Series

182 x 171 x 82mm (7.2 x 6.7 x 3.2 in)

- 24V, 48V
- Ball bearings
- 137 CFM
- Frame and Impeller: Aluminum
- Lead Wires: UL (+) Red; (-) Black
- Operating temperature: -10°C ~ +70°C
- Operating life: 50,000 hours
- UL, cUL, CE Listed
- RoHS Compliant



Model Number	V	Range (V)	A	RPM	CFM	m ³ /min	mmAq	inH ₂ O	dBA
RBH1881B2	24	12.0~27.6	2.2	2000	136.8	3.87	63.8	2.51	63
RBH1881B4	48	24.0~55.2	1.1	2000	136.8	3.87	63.8	2.51	63

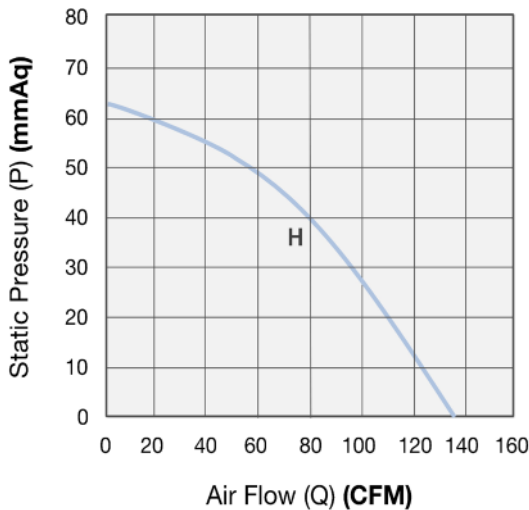

- Optional Features
- Inrush Current Protection
 - Autostart
 - Tachometer
 - Rotation Detector
 - Life Detection
 - Over Voltage Protection
 - VPWM
 - IPWM
 - PPWM
 - TPWM
 - RPWM
 - Current Limit Control
 - Constant Speed
 - IP56
 - IP67