



Unit: mm



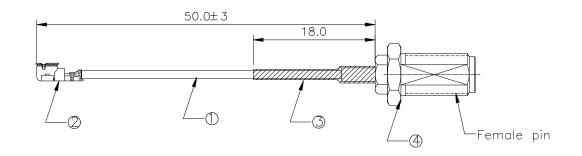







LOCK WASHER HEX NUT SPRING WASHER

RED HAT

Note:parts in bulk, 100SET/bag

ELECTRICAR CHARACTERISTICS REQUIREMENTS:

1.Product must be 100% conductionr,open

circuit short circuit test.

2.Conductive resistance: 20Ω

3.Rated voltage: AC 60V

4.Withstand voltage: AC 200V 5.Insulation resistance:500m Ω

6.characteristic impedance: 50Ω

7.Adopt environmental protection process and meet ROHS requirements

meet ROHS requirements 8. Tensile test: 1.5kg~

9. The general tolerance shall prevail if no

tolerance is noted

					RoHS	Compliant			
nd	5	COVER	_	RED HAT PACKING SMA	1	_			
	4	SMA FEMALE	_	11*1.13-ZYK-BACK PLUG RIVETING AND GOLD PLATING	1	_			
	3	HEAT SHRINK SLEEVE	_	2.0*18MM BLACK HEAT SHEINK SLEEVE	1	_			
	2	IPEX-1.13 CONN	_	IPEX-1.13 BRASS GOLD	1	_			
	1	COAXIAL CABLE	_	RG1.13 DARK GREY-48-TIN-FEP JACKET L=55MM	1	55			
	ITEM	PART No.	VENDOR	DESCRIPTION	Q'T	Y OVERALL			
	MATERIAL SPECIFICATION								

3			DRAWN BY	CHECKED BY	APPROVED BY	CONFIRMED BY	DESCR	IPTION	瀚国	医股份有限公司	CUST. CODE
2			LuLu 08/21.20'	Iron 08/21.20'	Iron 08/21.20'	Waleed 08/21.20'	RF CABLE	\$	CviLux Corporation		CUC
\triangle									DRAWING No.	CviLux P/N	CUSTOMER P/N
SYM	NAME DATE	REVISIONS					SHEET: 1	OF 1	DH50623A	DH-20G50009	_