
Ŧ	<u>م</u>	п	m	0





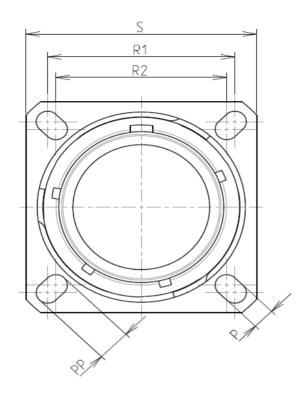

LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

ယ

 \sim

-Mass

BASIC SERIES:

SHELL SIZE : 11

SHELL TYPE : Square Flange Receptacle

PLATING : X = Without Plating

Н

CONTACT TYPE : Standard Crimp Contact

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Composite	
-Shell Plating	: Without Plating	
-Insulator	: Thermoplastic	
-Contacts	: Copper Alloy	
-Seals & Grommet	: Silicon Elastomer	
-Contact Plating	: Gold over copper Alloy $0.8 \mu m$ minimum	
-Durability	: 500 Mating cycles	
-Delivered without Souriau contacts		
-Temperature Range	: -65°C to +175°C	
-Salt Spray	: 2000 hours	

: 9.7 g ± 10%

8D 0

G

11

Х

01

Ρ

F

B L

Dim	Nominal
Р	3.25±0.2
PP	4.93±0.2
R1	20.62
R2	18.26
S	26.2±0.3
V	20.83+0/-1.25
W	2.1/2.5
Z	31.5 Max
VV THREAD	M15x1-6g


Delivered W/O Contacts


CONTACT LAYOUT : 11-01

CONTACT TYPE : PIN(500 Matings)

Е

ORIENTATION : B



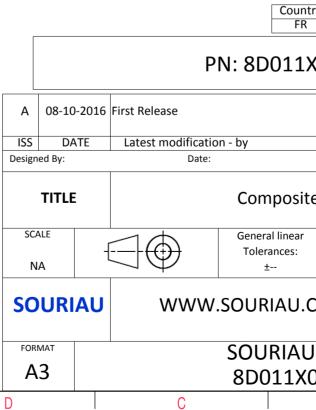

σ				
	A			
		4		
AS EXAMPLE		3		
any non-conformity or damage swhich does not comply with er of the Parties or by a third party adation, technical notice.) Untry Jurisdiction & Control List FR Not Listed		2		
	MOD N°			
site Receptacle 8D series	customer drawing e Receptacle 8D series			
Ar NPRDS / PROJECT				
I.COM SOURIAU it must not be reproduced or communicated without permission				
U DRG N°	SHEET			
X01PBL-C	1/2 A			

		G	ات	m		0
		Contact Layout				Panel Cutout
4		01			Â	SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING
	Ctc	1#12 11-01 X Y]		¥ ~	
ယ	A	0 0				Dim ØA ØAA R1 ØT
						SOURIAU shall not be liable for any due to a use of the Products whi the Specifications issued by either of (professional recommendation)
N						Country FR PN: 8D011X
					A 08-10-20 ISS DATE Designed By:	16 First Release Latest modification - by Date:
-					TITLE SCALE NA	Composite General linear Tolerances: ±
					FORMAT	U WWW.SOURIAU.CO
					A3	8D011X0
	Н	G	F	E	D	C

